

Safety Instructions **Memosens COS81E**

Supplement to BA02066C

Safety instructions for electrical apparatus in explosion-hazardous areas



Memosens COS81E

Supplement to BA02066C

Table of contents

Associated documentation	4
Supplementary documentation	4
Certificates	4
Identification	4
Ex-approval	4
Safety instructions	4
Type code	5
Temperature table	5
Connection	5
Installation conditions	6

Associated documentation This document is an integral part of Operating Instructions BA02066C.

Supplementary documentation  Competence Brochure CP00021Z
▪ Explosion Protection: Guidelines and General Principles
▪ www.endress.com

Certificates The NEPSI certificates and other certificates/declarations of conformity are available in the Downloads area of the Endress+Hauser website:
www.endress.com/download

The number of the NEPSI certificate that applies to the product can be found on the nameplate.

Identification The nameplate provides you with the following information on your device:
▪ Manufacturer identification
▪ Order code
▪ Extended order code
▪ Serial number
▪ Safety information and warnings
▪ Ex marking on hazardous area versions
▶ Compare the information on the nameplate with the order.

Ex-approval **NEPSI**
Ex ia op is IIC T6/T4/T3 Ga
Ex ia op is IIIC T90°C/T135°C/T200°C Da

Safety instructions The Memosens COS81E oxygen sensor is suitable for use in hazardous areas.
▪ A maximum ambient temperature of 90 °C (194 °F) must not be exceeded at the sensor head.
▪ Oxygen sensors for use in hazardous areas have a special conductive O-ring. The electrical connection of the metallic sensor shaft to the conductive mounting location (such as a metallic assembly) is via the O-ring.
▪ Appropriate measures must be taken to connect the assembly or the mounting location to ground in accordance with the Ex guidelines.
▪ The plastic housing may only be cleaned with a damp cloth.
▪ Hazardous area versions of digital sensors with Memosens technology are marked by an orange/red ring on the plug-in head.
▪ The maximum permitted cable length between the sensor and transmitter is 100 m (330 ft).
▪ When using devices and sensors, observe the regulations for electrical systems in hazardous areas (EN/IEC 60079-14).
▪ The procedures for electrical connection described in the Operating Instructions must be followed.
▪ The end user must adhere to the Operating Instructions and the following standards for the installation, operation and maintenance of the product:
▪ GB 50257 "Code for construction and acceptance of electric device for explosion atmospheres and fire hazard electrical equipment installation engineering".
▪ GB 3836.13 "Explosive atmospheres - Part 13: Equipment repair, overhaul and reclamation"
▪ GB/T 3836.15 "Explosive atmospheres - Part 15: Electrical installations design, selection and erection"
▪ GB/T 3836.16 "Explosive atmospheres - Part 16: Electrical installations inspection and maintenance"
▪ GB/T 3836.18 "Explosive atmospheres - Part 18: Intrinsically safe electrical systems"
▪ GB 15577 "Safety regulations for dust explosion prevention and protection".
▪ To ensure that the explosion protection of the device is maintained, the operator must not change the configuration. Any modification may affect safety.

- This device has been certified by the National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI) and also complies with the following standards:
- GB 3836.1 Explosive atmospheres-Part 1: Equipment-General requirements
- GB 3836.4 Explosive atmospheres-Part 4: Equipment protection by intrinsic safety "i"
- GB/T 3836.22 Explosive atmospheres-Part 22: Protection of equipment and transmission system using optical radiation
- Sensors containing parts made of titanium or other light metals must be protected against impact.
- In order to maintain and guarantee the explosion protection of the device, the user may not modify the configuration in any way. Every change can compromise the safety of the device.

Please find the current versions of standards on the certificate.

Type code

Memosens	COS81E-aabbccdde+g	
aa	Approval NG: Ex ia op is IIC T6/T4/T3 Ga	N5: ▪ Ex ia op is IIC T6/T4/T3 Ga ▪ Ex ia op is IIIC T90°C/T135°C/T200°C Da
bb	Measuring range (no ex-relevance)	
cc	Cap characteristics AC = Stainless steel C-shape AU = Stainless steel U-shape BC = Titanium C-shape BU = Titanium U-shape CC = Alloy C22 C-shape CU = Alloy C22 U-shape YY = Special version	
dd	Sensor length (no ex-relevance) max. 600 mm (23,6 in)	
e	Material of O-ring (in the cap) (no ex-relevance)	
g	Optional = one or more characters determining optional features (no ex-relevance), e.g. test or other certificates/declarations	

Temperature table

Sensor	Process temperature T_p	Ambient temperature T_a
COS81E	-15 ≤ T_p ≤ 130 °C (T3 rep. T200 °C) -15 ≤ T_p ≤ 120 °C (T4 rep. T135 °C) -15 ≤ T_p ≤ 70 °C (T6 rep. T90°C)	-25 ≤ T_a ≤ 70 °C (T3 rep. T200 °C) -25 ≤ T_a ≤ 90 °C (T4 rep. T135 °C) -25 ≤ T_a ≤ 70 °C (T6 rep. T90°C)

The above temperature table applies only under the following installation conditions, which are described in the following graphic →  6. If the installation conditions cannot be met, the maximum process temperature T_p must not exceed the maximum ambient temperature T_a .

Connection

Ex specification

- The conductivity sensors are approved and are suitable for use in explosion-hazardous environments.
- The approved Memosens COS81E digital oxygen sensor has an intrinsically safe input with the following parameter set:

Parameter	Value
P_i	180 mW


The approved Memosens COS81E digital oxygen sensor uses inherently safe optical radiation:

Parameter	Value
P_{opt} (sensor signal)	≤ 15 mW

The approved Memosens COS81E digital oxygen sensor must be connected to a Memosens cable or cable transmitter with intrinsically safe output with the following parameter:

Parameter	Value
P_o	max. 180 mW

Installation conditions

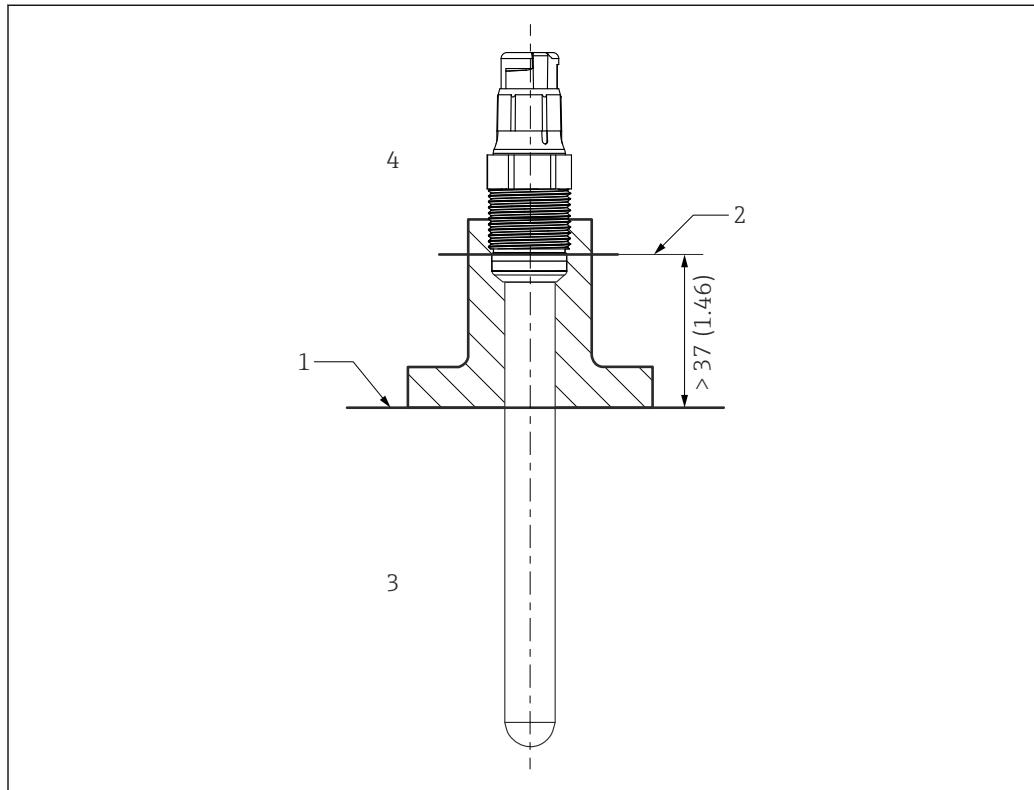

A0041281

 1 *Installation conditions*

- 1 Limit
- 2 Distance between plug-in head (lower edge) and process medium, without ring and thrust collar
- 3 Process temperature range T_p
- 4 Ambient temperature range T_a



71757036

www.addresses.endress.com
