

# Safety Instructions

## Nivotester FailSafe FTL825

[Ex ia Ga] IIC  
[Ex ia Da] IIIC



Document: XA01539F-A  
Safety instructions for electrical apparatus for explosion-hazardous areas → 3



# Nivotester FailSafe FTL825

## Table of contents

Associated documentation . . . . .	4
Supplementary documentation . . . . .	4
Manufacturer's certificates . . . . .	4
Manufacturer address . . . . .	4
Extended order code . . . . .	4
Safety instructions: General . . . . .	6
Safety instructions: Special conditions . . . . .	6
Safety instructions: Installation . . . . .	6
Temperature tables . . . . .	7
Connection data . . . . .	7

<b>Associated documentation</b>	This document is an integral part of the following Operating Instructions: BA01038F/00										
<b>Supplementary documentation</b>	Explosion-protection brochure: CP00021Z/11 The Explosion-protection brochure is available: <ul style="list-style-type: none"> <li>■ In the download area of the Endress+Hauser website: <a href="http://www.endress.com">www.endress.com</a> -&gt; Download -&gt; Advanced -&gt; Documentation Code: CP00021Z</li> <li>■ On the CD for devices with CD-based documentation</li> </ul>										
<b>Manufacturer's certificates</b>	<b>Certificate of Conformity TP TC 012/2011</b>  Inspection authority: NANIO CCVE («НАНІО ЦСВЭ»)  Certificate number: TC RU C-DE.GB05.B.00499  Affixing the certificate number certifies conformity with the following standards (depending on the device version): <ul style="list-style-type: none"> <li>■ GOST R IEC 60079-0-2011</li> <li>■ GOST R IEC 60079-11-2010</li> <li>■ GOST 31610.26-2012/ IEC 60079-26:2006</li> </ul>										
<b>Manufacturer address</b>	Address of manufacturer: see nameplate.										
<b>Extended order code</b>	The extended order code is indicated on the nameplate, which is affixed to the device in such a way that it is clearly visible. Additional information about the nameplate is provided in the associated Operating Instructions.  <b>Structure of the extended order code</b>  <table border="0" style="margin-left: 40px;"> <tr> <td style="text-align: center;">FTL825</td> <td style="text-align: center;">–</td> <td style="text-align: center;">*****</td> <td style="text-align: center;">+</td> <td style="text-align: center;">A*B*C*D*E*F*G*..</td> </tr> <tr> <td style="text-align: center;"><i>(Device type)</i></td> <td></td> <td style="text-align: center;"><i>(Basic specifications)</i></td> <td></td> <td style="text-align: center;"><i>(Optional specifications)</i></td> </tr> </table> <p>* = Placeholder At this position, an option (number or letter) selected from the specification is displayed instead of the placeholders.</p> <p><i>Basic specifications</i></p> <p>The features that are absolutely essential for the device (mandatory features) are specified in the basic specifications. The number of positions depends on the number of features available. The selected option of a feature can consist of several positions.</p> <p><i>Optional specifications</i></p> <p>The optional specifications describe additional features for the device (optional features). The number of positions depends on the number of features available. The features have a 2-digit structure to aid identification (e.g. JA). The first digit (ID) stands for the feature group and consists of a number or a letter (e.g. J = Test, Certificate). The second digit constitutes the value that stands for the feature within the group (e.g. A = 3.1 material (wetted parts), inspection certificate).</p> <p>More detailed information about the device is provided in the following tables. These tables describe the individual positions and IDs in the extended order code which are relevant to hazardous locations.</p>	FTL825	–	*****	+	A*B*C*D*E*F*G*..	<i>(Device type)</i>		<i>(Basic specifications)</i>		<i>(Optional specifications)</i>
FTL825	–	*****	+	A*B*C*D*E*F*G*..							
<i>(Device type)</i>		<i>(Basic specifications)</i>		<i>(Optional specifications)</i>							

**Extended order code: Nivotester FailSafe***Device type*

FTL825

*Basic specifications*

Position 1, 2 (Approval)		
Selected option		Description
FTL825	GD	EAC [Ex ia Ga] IIC, [Ex ia Da] IIC

Position 3 (Housing)		
Selected option		Description
FTL825	3	Rail mounting; 45 mm, 1-channel

Position 4 (Power Supply)		
Selected option		Description
FTL825	A	85-253 VAC/DC
	E	20-30 VAC/20-60 VDC

Position 5 (Switch Output)		
Selected option		Description
FTL825	4	2x SPST safety contact level + 1x SPST signal contact + 1x SPDT alarm

*Optional specifications*

ID Lx (Additional Approval)		
Selected option		Description
FTL825	LC	WHG overfill prevention, Leakage
	LE	GL marine certificate
	LF	ABS marine certificate
	LV	VdTÜV100 liquified gas approval

ID Px, Rx (Accessory Enclosed)		
Selected option		Description
FTL825	PA	Field housing, R4 182x180x165, 5xM20, PC, IP66

**Safety instructions: General**

- Staff must meet the following conditions for mounting, electrical installation, commissioning and maintenance of the device:
  - Be suitably qualified for their role and the tasks they perform
  - Be trained in explosion protection
  - Be familiar with national regulations
- Install the device according to the manufacturer's instructions and national regulations.
- Do not operate the device outside the specified electrical, thermal and mechanical parameters.
- Avoid electrostatic charging:
  - Of plastic surfaces (e.g. housing, sensor element, special varnishing, attached additional plates, ..)
  - Of isolated capacities (e.g. isolated metallic plates)
- Modifications to the device can affect the explosion protection and must be carried out by staff authorized to perform such work by Endress+Hauser.

**Safety instructions: Special conditions**


Permitted ambient temperature range at the electronics housing:  
 $-20\text{ °C} \leq T_a \leq +60\text{ °C}$

In case of series installation: Restriction to  $-20\text{ °C} \leq T_a \leq +50\text{ °C}$

In the event of additional or alternative special varnishing on the housing or other metal parts:

- Observe the danger of electrostatic charging and discharge.
- Do not rub surfaces with a dry cloth.


**Safety instructions: Installation**

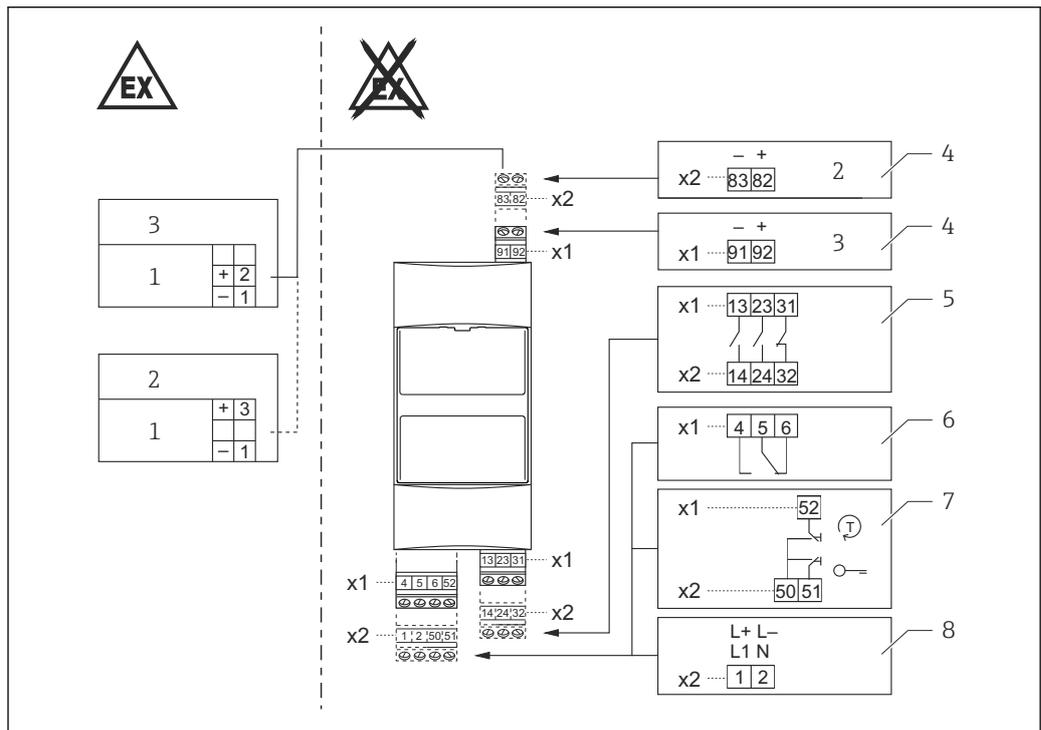

A0025641

**1**

- 1 Liquiphant FailSafe FTL8x, Ex ia IIC with electronics FEL85
- 2 Min. level safety
- 3 Max. level safety
- 4 Sensor
- 5 Level relay
- 6 Fault signal relay
- 7 Remote operation: test and unlocking
- 8 Power supply

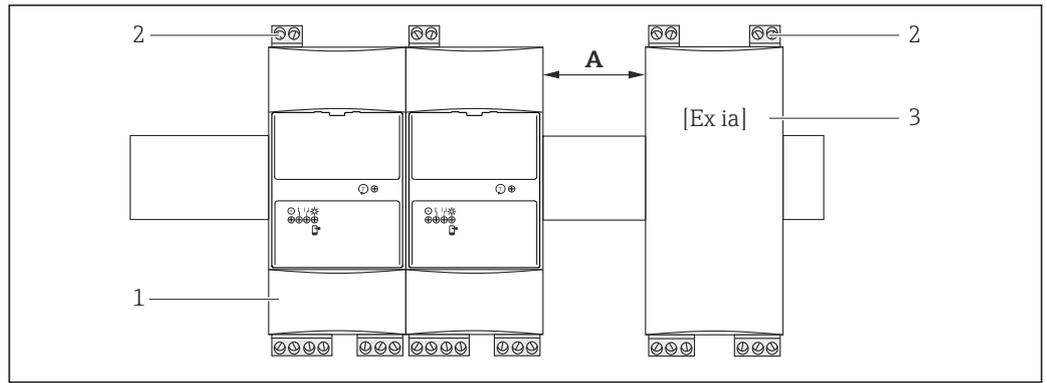

A0025642

2

- A Min. 6 mm
- 1 Nivotester FTL825
- 2 Intrinsically safe contacts
- 3 Other type, other product

- To achieve an ingress protection of at least IP55: Protect the device from dust and humidity, e.g. in control rooms, or located in a suitable protective housing.
- The device is an associated apparatus: Only use the device outside explosion hazardous areas.
- If an intrinsically safe circuit is connected to the device passes through dust explosion-hazardous areas of Zones 20 or Zone 21, make sure that the devices connected to this circuit meet the requirements of categories 1 D or 2 D and are certified accordingly.
- There must be a distance (thread measure) of at least 50 mm between intrinsically safe and nonintrinsically safe terminals.
- When combining the device with other types and products on the same top-hat rail: Keep the distances comply to the relevant standards and rules.

**Intrinsic safety**

The intrinsically-safe input circuits are galvanically isolated from other circuits up to a peak value of the nominal voltage of 375 V.

**Temperature tables**

**Ambient temperature**

<b>Individual installation</b>
-20 to +60 °C
<b>Series installation</b>
-20 to +50 °C

**Connection data**

**Power supply circuit**

Basic specification, Position 4 (Power Supply) = A

<b>Terminal 1, 2</b>
Power supply: U = 85 to 253 V <sub>AC</sub> , 50/60 Hz P ≤ 3.8 VA U = 85 to 253 V <sub>DC</sub> P ≤ 2 W

## Basic specification, Position 4 (Power Supply) = E

Terminal 1, 2
Power supply: $U = 20 \text{ to } 30 \text{ V}_{AC}, 50/60 \text{ Hz}$ $P \leq 3.6 \text{ VA}$ $U = 20 \text{ to } 60 \text{ V}_{DC}$ $P = 2.5 \text{ W}$

## Contact circuit

<b>Fault signal relay:</b>	<b>Terminal 4, 5, 6</b>
<b>Level relay:</b>	<b>Terminal 13, 14</b> <b>Terminal 23, 24</b> <b>Terminal 31, 32</b>
Power supply: $U \leq 253 \text{ V}_{AC}$ $I \leq 2 \text{ A}$ $P \leq 500 \text{ VA at } \cos \varphi > 0.7$ $U \leq 40 \text{ V}_{DC}$ $I \leq 2 \text{ A}$ $P \leq 80 \text{ W}$	

## Signal circuit

 Only connect the device to terminals 82 and 83 or terminals 91 and 92, respectively.

<b>Min. level safety:</b>	<b>Terminal 82 (+)</b> <b>Terminal 83 (-)</b>			
<b>Max. level safety:</b>	<b>Terminal 91 (-)</b> <b>Terminal 92 (+)</b>			
Connection data:	$U_o = 22 \text{ V}$ $I_o = 166 \text{ mA}$ $P_o = 970 \text{ mW}$	$R_i \geq 132 \Omega$ (Characteristic curve: linear) $C_i \leq 1 \text{ nF}$ $L_i = 0$		
	<b>[Ex ia Ga] IIC</b>		<b>[Ex ia Ga] IIB</b>	
	$L_o$	$C_o$	$L_o$	$C_o$
max. external capacitance at max. external inductance	0.15 mH	100 nF	0.15 mH	700 nF
	0.50 mH	40 nF	0.50 mH	500 nF
	1.00 mH	20 nF	1.00 mH	500 nF
	-	-	2.00 mH	500 nF

	<b>[Ex ia Ga] IIC</b>		<b>[Ex ia Ga] IIB</b>		<b>[Ex ia Ga] IIA</b>	
	$L_o$	$C_o$	$L_o$	$C_o$	$L_o$	$C_o$
max. external capacitance or max. external inductance	2.8 mH	165 nF	12.0 mH	1.14 $\mu\text{F}$	30 mH	4.2 $\mu\text{F}$

---



---



[www.addresses.endress.com](http://www.addresses.endress.com)

---