Protect your process

The Cleanfit CPA875 retractable assembly with patented sealing keeps your process 100% sterile

Safety meets ease of use

- Highest process safety
 The patented design of the dynamic sealing prevents contamination.
- Simple operation
 Remove, sterilize and calibrate the sensor while the process is running aseptic and hygienically safe.
- No cross-contamination Sterile design according to EHEDG and ASME BPE as well as sealings according to FDA and USP Class VI.
- Suitable for Memosens sensors
 Memosens, the cutting-edge
 digital sensor technology, provides
 safe, accurate measurement in the
 food & beverage and life sciences
 industries.



Completely sterile and safe

- Patented chamber design with 'safe-clean' sealing prevents contamination.
- Flush-mounted sealing (no dead space) according to FDA and USP Class VI criteria.
- EHEDG certified to meet the highest demands.
- Electropolished surfaces and aseptic stainless steel provide maximum hygiene and cleanability.
- Optional double service chamber offers an additional safety net.

Inline sensor handling for more ease of use

- Move and remove, measure, clean, sterilize and calibrate while your process is up and running.
- The optional automatic maintenance makes it even easier to keep your process sterile.


Highly accurate values with the digital Memosens sensor technology

- Calibration in the lab under optimum conditions guarantees accurate measured values.
- Non-contact inductive data transmission eliminates all errors due to moisture.
- The plug & play concept of Memosens sensors enables quick and easy sensor exchange.





Numerous connection options for any installation situation.

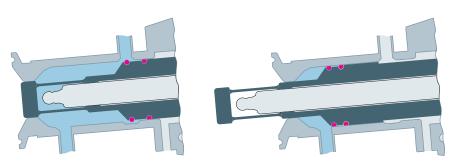

The sealing between sterile and non-sterile part moves dynamically with the sensor guide – just like in a syringe. The sterile space and the process medium remains untouched, eliminating the possibility for contamination.