

# Safety Instructions

## **Gammapilot M FMG60**

### **PROFIBUS PA, FOUNDATION Fieldbus**

### **(Ex d, Ex e)**

Ex de [ia Ga] IIC T6 Gb

Ex d [ia Ga] IIC T6 Gb

TÜV 13.0916



Document: XA01335F-A

Safety instructions for electrical apparatus for explosion-hazardous areas



# Gammapilot M

## FMG60

PROFIBUS PA, FOUNDATION Fieldbus (Ex d, Ex e)

### Associated Documentation

This document is an integral part of the following Operating Instructions:  
 PROFIBUS PA: BA00329F/00  
 FOUNDATION Fieldbus: BA00330F/00

The Operating Instructions which are supplied and correspond to the device type apply.

### Supplementary Documentation

Explosion-protection brochure:  
 CP00021Z/11

### Designation

Explanation of the labelling and type of protection can be found in the explosion protection brochure.

### Designation of type of protection

Ex de [ia Ga] IIC T6 Gb  
 Ex d [ia Ga] IIC T6 Gb


### Applied standards

ABNT NBR IEC 60079-0 :2008  
 ABNT NBR IEC 60079-1 :2009  
 ABNT NBR IEC 60079-7 :2008  
 ABNT NBR IEC 60079-11:2009  
 ABNT NBR IEC 60079-26:2008

**Communication PROFIBUS PA, FOUNDATION Fieldbus in type of protection Increased Safety "e" or Flameproof Enclosure "d"**

Type:


FMG60-\*\*C2\*\*\*\*\*, FMG60-\*\*D2\*\*\*\*\*, FMG60-\*\*G2\*\*\*\*\*, FMG60-\*\*H2\*\*\*\*\* or  
 FMG60-\*\*C3\*\*\*\*\*, FMG60-\*\*D3\*\*\*\*\*, FMG60-\*\*G3\*\*\*\*\*, FMG60-\*\*H3\*\*\*\*\*

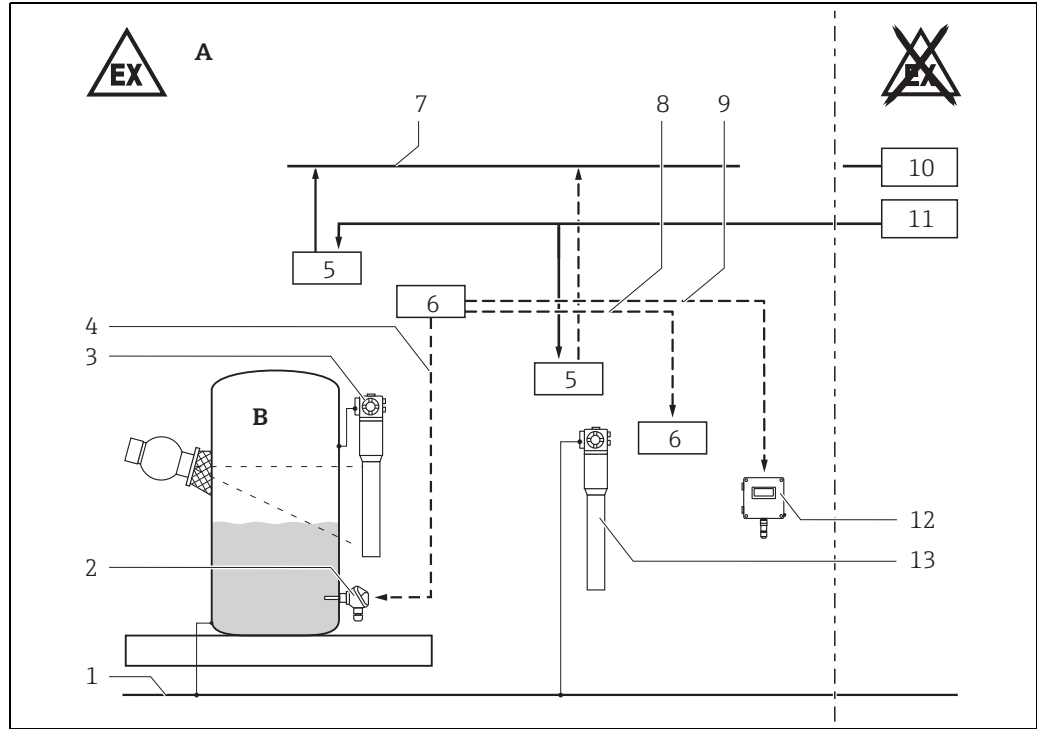

FMG60\_11




- A** Zone 1 or Zone 2
- B** Zone 0 or Zone 1
- 1 Local potential equalization line
- 2 PT100; certified apparatus
- 3 Gammapiilot with NaJ crystal scintillator or PVT plastic scintillator
- 4 [Ex ia] circuit
- 5 Terminal compartment A (Ex d or Ex e)
- 6 Terminal compartment B (Ex i)
- 7 Communication: PROFIBUS PA or FOUNDATION Fieldbus
- 8 [Ex ia] circuit; Cascade in, out
- 9 [Ex ia] circuit
- 10 Supply unit/Segment coupler
- 11 Power supply
- 12 Remote display FHX40
- 13 Gammapiilot with NaJ crystal scintillator or PVT plastic scintillator



- 1 Pipe housing
- 2 Compartment housing
- 3 Terminal compartment A
- 4 Terminal compartment B

**Safety instructions:  
Installation**

- Comply with the installation and safety instructions in the Operating Instructions.
- Install the device according to the manufacturer's instructions and any other valid standards and regulations.
- Do not operate the device outside the specified electrical, thermal and mechanical parameters.
- To maintain the ingress protection of the housing IP65/IP67, install the housing cover and cable glands correctly.
- Connect the apparatus to the on-site potential equalization line.
- Cable glands as well as sealing plugs of the terminal compartment A must not be exchanged with those of the terminal compartment B.
- During operation, the covers must be screwed all the way in and the safety catch of the cover must be fastened.
- Do not open the terminal compartment A when energized.
- In an explosive atmosphere: Minimum waiting time before opening the terminal compartment A after switching off the power supply: 3 minutes.
- The safety screws at the pipe housing must not be loosened:



When using the water cooling

- Use connecting cables for continuous service temperature  $T \geq T_a + 5 \text{ K}$ .

**Avoid electrostatic charging**

- In case of additional or alternative special varnishing of the enclosure or other metallic parts:
  - Do not rub the surfaces dry.
  - Do not install in the vicinity of processes generating strong electrostatic charges.
- Avoid electrostatic charging:
  - Of plastic surfaces (e.g. housing, sensor element, special varnishing, attached additional plates, ..)
  - Of isolated capacities (e.g. isolated metallic plates)


**Power supply  
in type of protection  
Increased Safety "e"**


- Only use suitable certified Ex e cable glands providing an ingress protection rating of at least IP65/IP67, which are suitable for the intended ambient temperature range.
- Replace cable glands and sealing plugs only with identical parts.

**Power supply  
in type of protection  
Flameproof Enclosure "d"**

- Connect the device using suitable certified Ex d cable glands or using conduit systems of protection type Flameproof Enclosure "d".
- Close unused entry glands with approved Ex d sealing plugs.

**Signal circuit  
in type of protection  
Intrinsic Safety "ia"**

- The pertinent guidelines must be observed when intrinsically safe circuits are connected together (Proof of Intrinsic Safety).
- The intrinsically safe circuits are galvanically isolated from other circuits up to a peak value of the nominal voltage of 375 V.
- The intrinsically safe circuits of the device are isolated from ground potential and have a dielectric strength of at least  $500 \text{ V}_{\text{rms}}$  with respect to it.
- When the device is connected to an intrinsically safe circuit Ex ib, the type of protection changes to Ex ib. Do not operate the temperature sensor in Zone 0 if the device is connected to an intrinsically safe circuit of Category Ex ib.
- For grounding the screen, →  2.

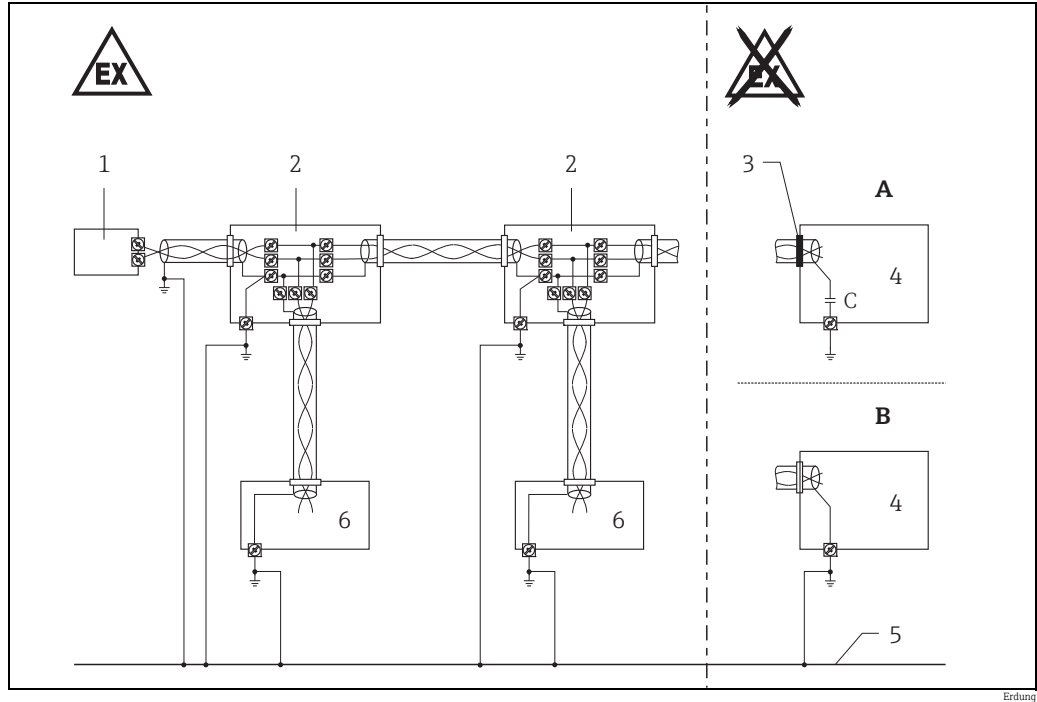


- A** Version 1  
Use small capacitors (e.g. 1 nF, 1500 V, dielectric strength, ceramic).  
Total capacitance connected to the screen may not exceed 10 nF.
- B** Version 2
- 1 Terminating resistor
- 2 Distributor/T box
- 3 Screen insulated
- 4 Supply unit/Segment coupler
- 5 Potential equalization (secured in high degree)
- 6 Field device

Temperature tables

Temperature class	
T6	

Ambient temperature	
Detector without water cooling or detector with water cooling out of operation:	
<ul style="list-style-type: none"> <li>▪ Devices with NaJ crystal scintillator:</li> <li>▪ Devices with PVT plastic scintillator:</li> </ul>	$-40\text{ °C} \leq T_a \leq +60\text{ °C}$ $-40\text{ °C} \leq T_a \leq +60\text{ °C}$
Detector with water cooling in operation:	
At the pipe housing (within the water cooling):	
<ul style="list-style-type: none"> <li>▪ Devices with NaJ crystal scintillator:</li> <li>▪ Devices with PVT plastic scintillator:</li> </ul>	$-40\text{ °C} \leq T_a \leq +60\text{ °C}$ $-40\text{ °C} \leq T_a \leq +60\text{ °C}$
At the compartment housing:	$-40\text{ °C} \leq T_a \leq +80\text{ °C}$



FMG60\_01




- 1 Pipe housing
- 2 Compartment housing
- 3 Terminal compartment A
- 4 Terminal compartment B

Type of protection	
Power supply circuit and communication circuit (Terminal compartment A)	Ex e or Ex d
Signal circuits (Terminal compartment B)	Ex ia

Connection data

Terminal compartment A

Increased Safety "e" or Flameproof Enclosure "d"



**Power supply circuit**


Type AC-power supply	L1 N	$U_e = 90...253 \text{ VAC}$ , 50/60 Hz, 8.5 VA
Type DC-power supply	L+ L-	$U_e = 18...36 \text{ VDC}$ , 3.5 W $U_m = 253 \text{ VAC}$






**Signal circuit**

FMG60-**C2***** FMG60-**D2***** FMG60-**G2***** FMG60-**H2***** FMG60-**C3***** FMG60-**D3***** FMG60-**G3***** FMG60-**H3*****		$U_e \leq 32 \text{ VDC}$ $I = 10 \text{ mA}$ (nominal current) $U_m = 253 \text{ VAC}$ The detector ensures galvanic isolation up to a maximum of 253 VAC between the fieldbus circuit and any other circuit.
--	--	---

## Terminal compartment B

## Intrinsic Safety "ia"



Signal circuit		Ex ia IIC	Ex ia IIB	Ex ib IIC	Ex ib IIB
Terminals 3, 4 not connected					
PT100	 $U_o = 8.4 \text{ V}$ $I_o = 8.3 \text{ mA}$ $P_o = 17.5 \text{ mW}$ $R_i = 1012 \Omega$ $C_i = 0$ $L_i = 0$ Characteristic curve: linear	$C_o = 1200 \text{ nF}$ at $L_o = 1 \text{ mH}$  $C_o = 1800 \text{ nF}$ at $L_o = 0.15 \text{ mH}$	$C_o = 6 \mu\text{F}$ at $L_o = 1 \text{ mH}$  $C_o = 5.2 \mu\text{F}$ at $L_o = 2 \text{ mH}$	$C_o = 5.2 \mu\text{F}$ $L_o = 400 \text{ mH}$	$C_o = 43 \mu\text{F}$ $L_o = 400 \text{ mH}$
Cascade out	 $U_o = 8.4 \text{ V}$ $I_o = 19.2 \text{ mA}$ $P_o = 40.3 \text{ mW}$ $R_i = 439 \Omega$ $C_i = 5.3 \text{ nF}$ $L_i = 67 \mu\text{H}$ Characteristic curve: linear	$C_o = 5.1 \mu\text{F}$ $L_o = 69 \text{ mH}$	$C_o = 42 \mu\text{F}$ $L_o = 199 \text{ mH}$	$C_o = 5.1 \mu\text{F}$ $L_o = 69 \text{ mH}$	$C_o = 42 \mu\text{F}$ $L_o = 199 \text{ mH}$
<b>Only for connection to FMG60 signal circuit "Cascade in"</b>					
Cascade in	 $U_i = 8.4 \text{ V}$ $I_i = 19.2 \text{ mA}$ $P_i = 40.3 \text{ mW}$ $C_i = 0$ $L_i = 67 \mu\text{H}$				
<b>Only for connection to FMG60 signal circuit "Cascade out"</b>					
Connection for FHX40	 $U_o = 4.7 \text{ V}$ $I_o = 37.7 \text{ mA}$ $P_o = 44.3 \text{ mW}$ $R_i = 125 \Omega$ $C_i = 12.7 \text{ nF}$ $L_i = 0$ Characteristic curve: linear	For connection to the approved display FHX40 with associated cable in type of protection Intrinsic Safety Ex ia IIC or IIB. Observe associated Safety Instructions! $C_o = 150 \mu\text{F}$ $L_o = 25 \text{ mH}$			











[www.addresses.endress.com](http://www.addresses.endress.com)

---