



52026080

FM Control Drawing 960006753 A

Cerabar S/Deltabar S
PMP71, PMP72, PMP75/
PMD75, FMD77, FMD78
PROFIBUS PA/FOUNDATION Fieldbus

Endress+Hauser
People for Process Automation



Cerabar S/Deltabar S is suitable for the connection to a PROFIBUS PA/FOUNDATION Fieldbus system according to the Entity- or FISCO-Concept (as described below).

FISCO-Concept

The FISCO Concept allows interconnection of intrinsically safe apparatus to associated apparatus not specifically examined in such combination.

The criteria for interconnection is that the voltage (U_i or V_{max}), the current (I_i or I_{max}) and the power (P_i or P_{max}) which intrinsically safe apparatus can receive and remain intrinsically safe, considering faults, must be equal or greater than the voltage (U_o or V_{oc} or V_t), the current (I_o or I_{sc} or I_t) and the power (P_o or P_{max}) levels which can be delivered by the associated apparatus, considering faults and applicable factors. In addition, the maximum unprotected capacitance (C_i) and inductance (L_i) of each apparatus (other than the termination) connected to the fieldbus must be less than or equal to 5 nF and 10 µH respectively. In each segment only one active device, normally the associated apparatus, is allowed to provide the necessary energy for the fieldbus system.

The voltage U_o (or V_{oc} or V_t) of the associated apparatus has to be limited to the range of 14V to 24V d.c. All other equipment connected to the bus cable has to be passive, meaning that they are not allowed to provide energy to the system, except to a leakage current of 50 µA for each connected device. Separately powered equipment needs a galvanic isolation to assure that the intrinsically safe fieldbus circuit remains passive.

The cable used to interconnect the devices needs to have the parameters in the following range:

loop resistance R_i : 15...150 Ω/km inductance per unit length L_i : 0.4...1 mH/km
capacitance per unit length C_i : 80...200 nF/km
 $C_i = C' \cdot \text{line/line} + 0.5 \cdot C' \cdot \text{line/screen}$, if both lines are floating or $C_i = C' \cdot \text{line/line} + C' \cdot \text{line/screen}$, if the screen is connected to one line

length of spur cable: ≤ 30 m length of trunk cable: ≤ 1 km length of splice: ≤ 1 m

At each end of the trunk cable an approved infallible line termination with the following parameters is suitable:
 $R = 90 \dots 100 \Omega$ $C = 0 \dots 2.2 \mu F$

One of the allowed terminations might already be integrated in the associated apparatus.

The number of passive devices connected to the bus segment is not limited due to i.s. reasons. If the above rules are respected, up to a total length of 1000 m (sum of the length of trunk cable and all spur cables), the inductance and capacitance of the cable will not impair the intrinsic safety of the installation.

Intrinsically safe installations intrinsically safe for CLASS I, DIV.1, GROUPS A, B, C, D; AEx ia IIC T6

1. FM Approved apparatus must be installed in accordance with manufacturer instructions
2. FM Approved associated apparatus must meet the following requirements:
 U_o or V_{oc} or $V_t \leq U_i$ (V_{max}) and I_o or I_{sc} or $I_t \leq I_i$ (I_{max}) and P_o or $P_{max} \leq P_i$ (P_{max})
3. The maximum non-hazardous area voltage must not exceed 250 V.
4. The installation must be in accordance with the National Electrical Code NFPA 70 and ANSI/ISA - RP 12.06.01 (except chapter 5).
5. Be aware of multiple earthing of screen. The screen must be connected in accordance with National Electrical Code.
6. Caution: Use only supply wires suitable for 5 °C above surrounding temperature
7. Warning: Substitution of components may impair intrinsic safety.
8. The polarity for connecting PA+ (1) and PA- (2) is of no importance due to an internal rectifier.

Division 2 and Zone 2 installation

Nonincendive Class I, Div.2, group A,B,C,D Hazardous Location Installation

9. Installation shall be in accordance with NEC using threaded conduits or other wiring methods in accordance with articles 500 to 510.

Intrinsic safety barrier not required. Max. supply voltage 32 V. For T-code see table.

10. Nonincendive field wiring installation

The Nonincendive Field Wiring Circuit Concept allows interconnection of nonincendive field wiring apparatus with associated nonincendive field wiring apparatus or associated apparatus not specifically examined in combination as a system using any of the wiring methods permitted for unclassified locations, when $V_{max} \geq V_{oc}$ or V_t , $C_a \geq C_i + C_{cable}$, $L_a \geq L_i + L_{cable}$. Transmitter parameters are as follows: $V_{max} = 32 \text{ VDC}$; $C_i \leq 5 \text{ nF}$; $L_i \leq 10 \mu H$
 $I_{max} = \text{see note 11}$

11. For these current controlled circuit, the parameter I_{max} is not required and need not to be aligned with parameter I_{sc} and it of the nonincendive field wiring or associated apparatus.

12. Warning: Explosion Hazard – Do not disconnect equipment unless power has been switched off.

Warning: Substitution of Components may impair suitability for Class I, Div.2.


Class II, III installation

DIP for Class II and III, Div.1, group E, F, G Hazardous Location Installation

13. Installation of transmitter wiring according to NEC using threaded conduits or other wiring methods in accordance with articles 500 to 510.

HAZARDOUS (CLASSIFIED) LOCATION

Class I, Zone 0, IIC
Class I, Division 1, 2, Groups A,B,C,D
Class II, Division 1, 2, Groups E,F,G
Class III



Cerabar S/Deltabar S

Cerabar S/Deltabar S with electronic insert for PROFIBUS PA/FOUNDATION Fieldbus (Entity-Concept)

U_i (V_{max}) = 24 V
 I_i (I_{max}) = 250 mA
 P_i (P_{max}) = 1.2 W
 $C_i \leq 5 \text{ nF}$ $L_i \leq 10 \mu H$
Leakage current ≤ 50 µA

Temperature classification	T6	T4
Max. ambient temperature	40°C 104 °F	70°C 158 °F

Min. ambient temp.: -40°C (optional: -50°C)

Cerabar S/Deltabar S with electronic insert for PROFIBUS PA/FOUNDATION Fieldbus (FISCO-Concept)


U_i (V_{max}) = 17.5 V
 I_i (I_{max}) = 500 mA
 P_i (P_{max}) = 5.5 W
 $C_i \leq 5 \text{ nF}$ $L_i \leq 10 \mu H$
Leakage current ≤ 50 µA

Temperature classification	T6	T4
Max. ambient temperature	40°C 104 °F	70°C 158 °F

Min. ambient temp.: -40°C (optional: -50°C)

Any FM Approved Termination with
 $R = 90 \dots 100 \Omega$
 $C = 0 \dots 2.2 \mu F$

NONHAZARDOUS LOCATION

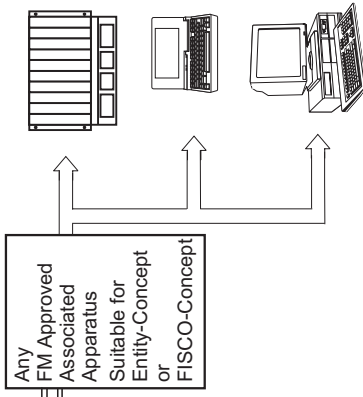

This device is suitable to be installed in accordance with the wiring methods of Division 1/ Zone 0 for intrinsic safety (as defined above) or for Division 1/ Zone 1 for explosionproof protection.

For installations in accordance with the requirements of explosionproof protection the device is suitable for:

Cerabar S/Deltabar S:
XP, CII Div.1 Gp. ABCD
DIP for CII Div.1 Gp. EFG CIIII

Cerabar S for pressure range 700 bar/ 10500 psi:
XP, CII Div.1 Gp. BCD
DIP for CII Div.1 Gp. EFG CIIII

seals must be installed within 18 inches of enclosure
max. supply voltage: 32 VDC
ambient temp. range: -40°C...75°C
(optional Tamin: -50°C)
Warning: Changing the type of protection after first installation may impair the explosion protection.