

# Technical Information

## RMA42

Process transmitter with control unit



4-wire process transmitter with control unit as DIN rail device with up to two universal sensor inputs and optional SIL approval

### Application

- Plant and apparatus engineering
- Control rooms and cabinets
- Process recording and monitoring
- Process control
- Signal adjustment and conversion
- WHG-compliant limit signal transmitter

### Your benefits


- 5-digit, 7-segment backlit LC display
- User-configurable dot matrix display range for bar graph, units and tag name
- 1 or 2 universal inputs
- 2 relays (optional)
- Min./max. value saved
- 1 or 2 calculated values
- One linearization table with 32 points for each calculated value
- 1 or 2 analog outputs
- Digital status output (open collector)
- Operation using 3 keys
- Configuration via interface and FieldCare or DeviceCare software

# Table of contents

|   |           |  |           |
|---|-----------|--|-----------|
| <b>Function and system design</b> . . . . .   | <b>3</b>  | <b>Ordering information</b> . . . . .        | <b>11</b> |
| Measuring principle . . . . .                 | 3         | <b>Accessories</b> . . . . .                 | <b>11</b> |
| Measuring system . . . . .                    | 3         | Communication-specific accessories . . . . . | 11        |
| Mathematics functions . . . . .               | 3         | Online tools . . . . .                       | 11        |
| <b>Input</b> . . . . .                        | <b>4</b>  | <b>Documentation</b> . . . . .               | <b>12</b> |
| Measured variable . . . . .                   | 4         |  |           |
| Measuring range . . . . .                     | 4         |  |           |
| Number of inputs . . . . .                    | 4         |  |           |
| Measuring cycle . . . . .                     | 4         |  |           |
| Galvanic isolation . . . . .                  | 4         |  |           |
| <b>Output</b> . . . . .                       | <b>5</b>  |  |           |
| Output signal . . . . .                       | 5         |  |           |
| Loop power supply . . . . .                   | 5         |  |           |
| Switching output . . . . .                    | 5         |  |           |
| Relay output . . . . .                        | 5         |  |           |
| <b>Power supply</b> . . . . .                 | <b>6</b>  |  |           |
| Terminal assignment . . . . .                 | 6         |  |           |
| Supply voltage . . . . .                      | 6         |  |           |
| Power consumption . . . . .                   | 6         |  |           |
| Interface connection data . . . . .           | 6         |  |           |
| <b>Performance characteristics</b> . . . . .  | <b>7</b>  |  |           |
| Reference operating conditions . . . . .      | 7         |  |           |
| Maximum measured error . . . . .              | 7         |  |           |
| <b>Installation</b> . . . . .                 | <b>8</b>  |  |           |
| Mounting location . . . . .                   | 8         |  |           |
| Orientation . . . . .                         | 8         |  |           |
| <b>Environment</b> . . . . .                  | <b>8</b>  |  |           |
| Ambient temperature range . . . . .           | 8         |  |           |
| Storage temperature . . . . .                 | 8         |  |           |
| Altitude . . . . .                            | 9         |  |           |
| Climate class . . . . .                       | 9         |  |           |
| Degree of protection . . . . .                | 9         |  |           |
| Electrical safety . . . . .                   | 9         |  |           |
| Condensation . . . . .                        | 9         |  |           |
| Electromagnetic compatibility (EMC) . . . . . | 9         |  |           |
| <b>Mechanical construction</b> . . . . .      | <b>9</b>  |  |           |
| Design, dimensions . . . . .                  | 9         |  |           |
| Weight . . . . .                              | 9         |  |           |
| Material . . . . .                            | 9         |  |           |
| Terminals . . . . .                           | 9         |  |           |
| <b>Operability</b> . . . . .                  | <b>10</b> |  |           |
| On-site operation . . . . .                   | 10        |  |           |
| Local display . . . . .                       | 10        |  |           |
| Remote operation . . . . .                    | 10        |  |           |
| <b>Certificates and approvals</b> . . . . .   | <b>11</b> |  |           |

## Function and system design

### Measuring principle

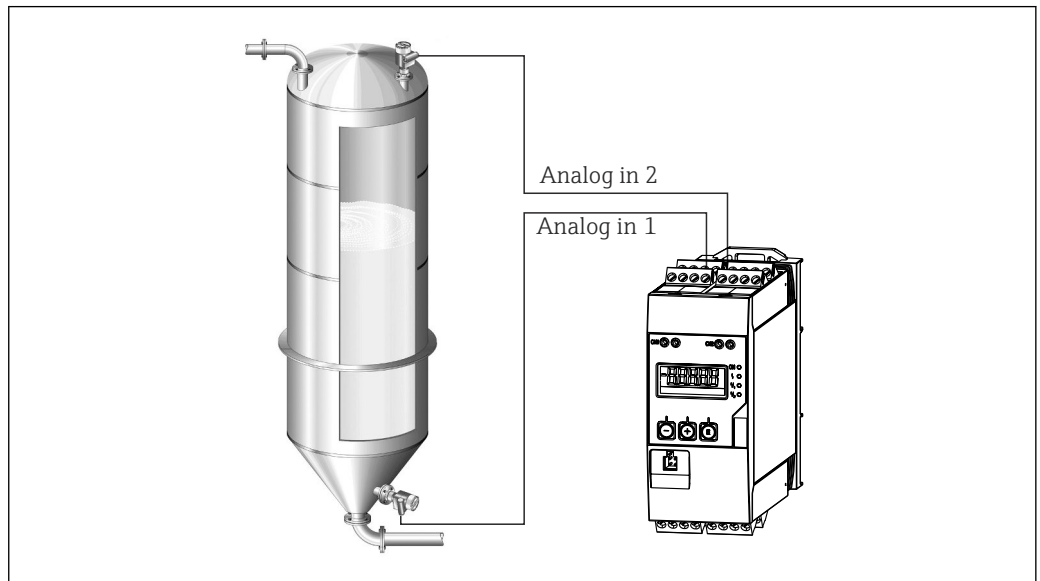

1 Example of a "differential pressure" application

A0011762

The RMA42 process transmitter powers the transmitter and processes analog signals from transmitters, particularly from the area of process instrumentation. These signals are monitored, evaluated, calculated, saved, separated, linked, converted and displayed. The signals and results of calculations are communicated by analog means, as a switch output and displayed digitally.

### Measuring system

The RMA42 is a process transmitter that is controlled by a microcontroller and features a display, analog inputs for process and status signals, analog and digital outputs, as well as a configuration interface.

Connected sensors (e.g. temperature, pressure) can be powered by the integrated transmitter power supply system. These signals are monitored, evaluated, calculated, saved (min/max values) and provided at the various outputs. All measured values, and values calculated in any way, are available as a signal source for the display, all outputs, relays and the interface. It is possible to make multiple use of the signals and results (e.g. a signal source as an analog output signal and limit value for a relay).

### Mathematics functions

The following mathematics functions are available in the RMA42:

- Sum
- Difference
- Multiplication
- Mean value
- Linearization

#### Linearization function

Up to 32 user-definable points are available in the device per calculated value to linearize the input, e.g. for tank linearization. With the two-channel device (option), the mathematics channel M2 can be used to linearize mathematics channel M1.

Linearization is also available in the FieldCare configuration software.

# Input

|                    |   |
|--------------------|---|
| Measured variable  | Current, voltage, resistance, resistance thermometer, thermocouples   |
| Measuring range    | <p>Current:</p> <ul style="list-style-type: none"> <li>0/4 to 20 mA +10% overrange</li> <li>Short-circuit current: max. 150 mA</li> <li>Load: 10 <math>\Omega</math></li> </ul> <p>Voltage:</p> <ul style="list-style-type: none"> <li>0 to 10 V, 2 to 10 V, 0 to 5 V, 0 to 1 V, 1 to 5 V, <math>\pm 1</math> V, <math>\pm 10</math> V, <math>\pm 30</math> V, <math>\pm 100</math> mV</li> <li>Max. permitted input voltage: <ul style="list-style-type: none"> <li>Voltage <math>\geq 1</math> V: <math>\pm 35</math> V</li> <li>Voltage <math>&lt; 1</math> V: <math>\pm 12</math> V</li> </ul> </li> <li>Input impedance: <math>&gt; 1\,000\text{ k}\Omega</math></li> </ul> <p>Resistance:</p> <p>30 to 3 000 <math>\Omega</math></p> <p>RTD assembly:</p> <ul style="list-style-type: none"> <li>Pt100 as per IEC60751, GOST, JIS1604</li> <li>Pt500 and Pt1000 as per IEC60751</li> <li>Cu100, Cu50, Pt50, Pt46, Cu53 as per GOST</li> <li>Ni100, Ni1000 as per DIN 43760</li> </ul> <p>Thermocouple types:</p> <ul style="list-style-type: none"> <li>Type J, K, T, N, B, S, R as per IEC60584</li> <li>Type U as per DIN 43710</li> <li>Type L as per DIN 43710, GOST</li> <li>Type C, D as per ASTM E998</li> </ul> |
| Number of inputs   | One or two universal inputs   |
| Measuring cycle    | 200 ms  |
| Galvanic isolation | Towards all other circuits  |

## Output

### Output signal

One or two analog outputs, galvanically isolated

#### Current/voltage output

Current output:

- 0/4 to 20 mA
- Overrange up to 22 mA

Voltage:

- 0 to 10 V, 2 to 10 V, 0 to 5 V, 1 to 5 V
- Overrange: up to 11 V, short-circuit proof,  $I_{\max} < 25 \text{ mA}$

#### HART®

HART® signals are not affected

### Loop power supply

- Open-circuit voltage:  $24 V_{DC}$  (+15% / -5%)
- Hazardous area version:  $> 14 \text{ V}$  at 22 mA
- Non-hazardous area version without SIL:  $> 16 \text{ V}$  at 22 mA
- Non-hazardous area version with SIL:  $> 14 \text{ V}$  at 22 mA
- Maximum 30 mA short-circuit-proof and overload-resistant
- Galvanically isolated from system and outputs

### Switching output

Open collector for monitoring the device state as well as open circuit and alarm notification. The OC output is closed in the fault-free operating state. In error state, the OC output is opened.

- $I_{\max} = 200 \text{ mA}$
- $U_{\max} = 28 \text{ V}$
- $U_{\text{on}/\max} = 2 \text{ V}$  at 200 mA

Galvanic isolation to all circuits, test voltage 500 V


### Relay output

Relay output for limit monitoring

| Relay contact                              | Change-over contact   |
|--|---|
| Maximum contact load DC                    | 30 V / 3 A (permanent state, without destruction of the input)  |
| Maximum contact load AC                    | 250 V / 3 A (permanent state, without destruction of the input) |
| Minimum contact load                       | 500 mW (12 V/10 mA)   |
| Galv. isolation towards all other circuits | Test voltage 1 500 V <sub>AC</sub>                              |
| Switching cycles                           | > 1 million   |

## Power supply

### Terminal assignment

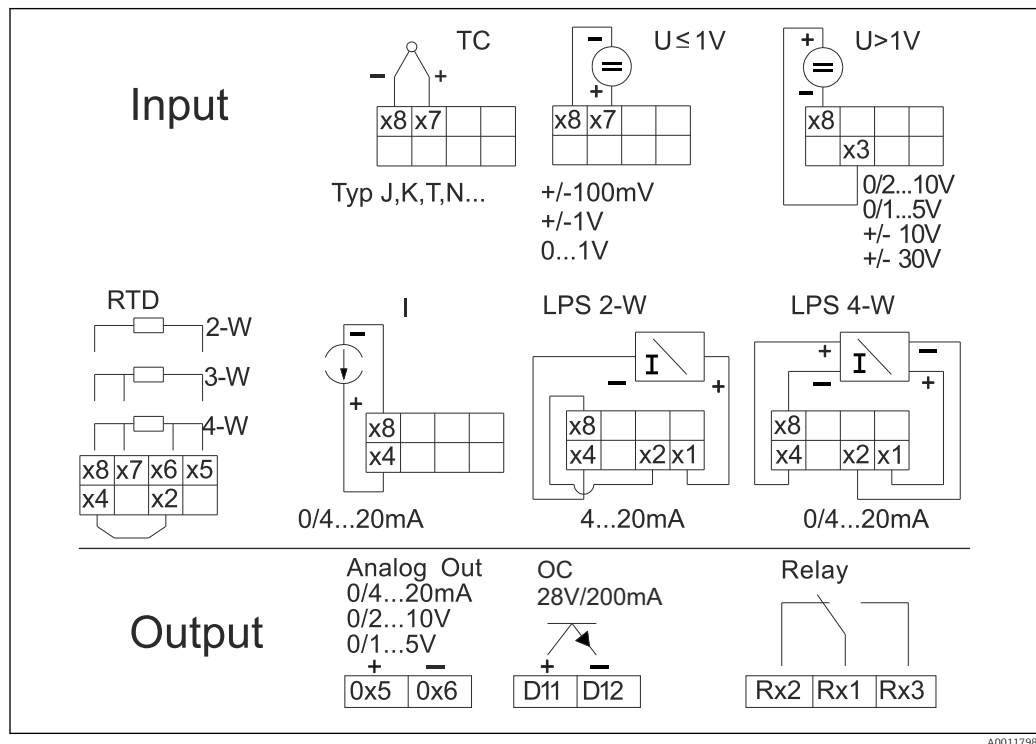

2 Terminal assignment of the process transmitter (relay (terminals Rx1-Rx3) and channel 2 (terminals 21-28 and 025/026) optional). Note: Illustrated contact position of the relays if the power supply fails.

### Supply voltage

Wide range power supply 24 to 230 V AC/DC (-20 % / +10 %) 50/60 Hz

### Power consumption

Max. 21.5 VA / 6.9 W

### Interface connection data

#### Commubox FXA291 PC USB interface

- Connection: 4-pin socket
- Transmission protocol: FieldCare
- Transmission rate: 38,400 baud

#### Interface cable TXU10-AC PC USB interface

- Connection: 4-pin socket
- Transmission protocol: FieldCare
- Order configuration: interface cable with FieldCare Device Setup DVD incl. all Comm DTMs and Device DTMs

## Performance characteristics

### Reference operating conditions

Power supply: 230 V<sub>AC</sub>, 50/60 Hz

Ambient temperature: 25 °C (77 °F) ± 5 °C (9 °F)

Humidity: 20 %...60 % rel. humidity

### Maximum measured error

#### Universal input:

| Accuracy | Input:                 | Range:   | Maximum measured error of measuring range (oMR):   |
|----------|------------------------|--|--|
|          | Current                | 0 to 20 mA, 0 to 5 mA, 4 to 20 mA; Overrange: up to 22 mA  | ±0.05%   |
|          | Voltage ≥ 1 V          | 0 to 10 V, 2 to 10 V, 0 to 5 V, 1 to 5 V, 0 to 1 V, ±1 V, ±10 V, ±30 V   | ±0.1%  |
|          | Voltage < 1 V          | ±100 mV  | ±0.05%   |
|          | Resistance measurement | 30 to 3 000 Ω  | 4-wire: ± (0.10% oMR + 0.8 Ω)<br>3-wire: ± (0.10% oMR + 1.6 Ω)<br>2-wire: ± (0.10% oMR + 3 Ω)                                |
|          | RTD                    | Pt100, -200 to 850 °C (-328 to 1 562 °F) (IEC60751, α=0.00385)<br>Pt100, -200 to 850 °C (-328 to 1 562 °F) (JIS1604, w=1.391)<br>Pt100, -200 to 649 °C (-328 to 1 200 °F) (GOST, α=0.003916)<br>Pt500, -200 to 850 °C (-328 to 1 562 °F) (IEC60751, α=0.00385)<br>Pt1000, -200 to 600 °C (-328 to 1 112 °F) (IEC60751, α=0.00385)                                    | 4-wire: ± (0.10% oMR + 0.3 K (0.54 °F))<br>3-wire: ± (0.10% oMR + 0.8 K (1.44 °F))<br>2-wire: ± (0.10% oMR + 1.5 K (2.7 °F)) |
|          |                        | Cu100, -200 to 200 °C (-328 to 392 °F) (GOST, w=1.428)<br>Cu50, -200 to 200 °C (-328 to 392 °F) (GOST, w=1.428)<br>Pt50, -200 to 1 100 °C (-328 to 2 012 °F) (GOST, w=1.391)<br>Pt46, -200 to 850 °C (-328 to 1 562 °F) (GOST, w=1.391)<br>Ni100, -60 to 250 °C (-76 to 482 °F) (DIN43760, α=0.00617)<br>Ni1000, -60 to 250 °C (-76 to 482 °F) (DIN43760, α=0.00617) | 4-wire: ± (0.10% oMR + 0.3 K (0.54 °F))<br>3-wire: ± (0.10% oMR + 0.8 K (1.44 °F))<br>2-wire: ± (0.10% oMR + 1.5 K (2.7 °F)) |
|          |                        | Cu53, -50 to 200 °C (-58 to 392 °F) (GOST, w=1.426)  | 4-wire: ± (0.10% oMR + 0.3 K (0.54 °F))<br>3-wire: ± (0.10% oMR + 0.8 K (1.44 °F))<br>2-wire: ± (0.10% oMR + 1.5 K (2.7 °F)) |
|          | Thermocouples          | Typ J (Fe-CuNi), -210 to 1 200 °C (-346 to 2 192 °F) (IEC60584)  | ± (0.10% oMR + 0.5 K (0.9 °F))<br>from -100 °C (-148 °F)   |
|          |                        | Typ K (NiCr-Ni), -200 to 1 372 °C (-328 to 2 502 °F) (IEC60584)  | ± (0.10% oMR + 0.5 K (0.9 °F))<br>from -130 °C (-202 °F)   |
|          |                        | Typ T (Cu-CuNi), -270 to 400 °C (-454 to 752 °F) (IEC60584)  | ± (0.10% oMR + 0.5 K (0.9 °F))<br>from -200 °C (-328 °F)   |
|          |                        | Typ N (NiCrSi-NiSi), -270 to 1 300 °C (-454 to 2 372 °F) (IEC60584)  | ± (0.10% oMR + 0.5 K (0.9 °F))<br>from -100 °C (-148 °F)   |
|          |                        | Typ L (Fe-CuNi), -200 to 900 °C (-328 to 1 652 °F) (DIN43710, GOST)  | ± (0.10% oMR + 0.5 K (0.9 °F))<br>from -100 °C (-148 °F)   |
|          |                        | Typ D (W3Re/W25Re), 0 to 2 495 °C (32 to 4 523 °F) (ASTME998)  | ± (0.15% oMR + 1.5 K (2.7 °F))<br>from 500 °C (932 °F)   |
|          |                        | Typ C (W5Re/W26Re), 0 to 2 320 °C (32 to 4 208 °F) (ASTME998)  | ± (0.15% oMR + 1.5 K (2.7 °F))<br>from 500 °C (932 °F)   |

| Accuracy                | Input: | Range:  | Maximum measured error of measuring range (oMR):  |
|-------------------------|--------|---|---|
|                         |        | Typ B (Pt30Rh-Pt6Rh),<br>0 to 1820 °C (32 to 3 308 °F) (IEC60584)   | ± (0.15% oMR +1.5 K (2.7 °F))<br>from 600 °C (1 112 °F)   |
|                         |        | Typ S (Pt10Rh-Pt),<br>–50 to 1 768 °C (–58 to 3 214 °F) (IEC60584)  | ± (0.15% oMR +3.5 K (6.3 °F))<br>for –50 to 100 °C (–58 to 212 °F)<br>± (0.15% oMR +1.5 K (2.7 °F))<br>from 100 °C (212 °F) |
|                         |        | Typ U (Cu-CuNi),<br>–200 to 600 °C (–328 to 1 112 °F) (DIN 43710)   | ± (0.15% oMR +1.5 K (2.7 °F))<br>from 100 °C (212 °F)   |
| AD converter resolution |        | 16 bit  |   |
| Temperature drift       |        | Temperature drift: ≤ 0.01%/K (0.1%/18 °F) oMR<br>≤ 0.02%/ K (0.2%/18 °F) oMR for Cu100, Cu50, Cu53, Pt50 and Pt46 |   |

### Analog output:

|                    |  |  |  |
|--------------------|--|--|--|
| Current            | 0/4 to 20 mA, overrange up to 22 mA  |  | ±0.05% of measuring range                              |
|                    | Max. load  |  | 500 Ω  |
|                    | Max. inductivity   |  | 10 mH  |
|                    | Max. capacity  |  | 10 µF  |
|                    | Max. ripple  |  | 10 mVpp at 500 Ω, frequency < 50 kHz                   |
| Voltage            | 0 to 10 V, 2 to 10 V<br>0 to 5 V, 1 to 5 V<br>Overrange: up to 11 V, shortcircuit proof, $I_{max} < 25$ mA |  | ±0.05% of measuring range<br>±0.1 % of measuring range |
|                    | Max. ripple  |  | 10 mVpp at 1 000 Ω, frequency < 50 kHz                 |
| Resolution         | 13 bit   |  |  |
| Temperature drift  | ≤ 0.01%/K (0.1%/18 °F) of measuring range  |  |  |
| Galvanic isolation | Testing voltage of 500 V towards all other circuits  |  |  |

## Installation

|                   |  |
|-------------------|--|
| Mounting location | Mounting on top-hat rail as per IEC 60715. |
|-------------------|--|

|             |                         |
|-------------|-------------------------|
| Orientation | Vertical or horizontal. |
|-------------|-------------------------|

### NOTICE

**Heat accumulation when installing several devices on a vertically mounted top-hat rail**

- Keep sufficient gaps between the individual devices.

## Environment

|                           |               |
|---------------------------|---------------|
| Ambient temperature range | <b>NOTICE</b> |
|---------------------------|---------------|

**The life-time of the display is shortened when operated in the upper temperature range.**


- To avoid heat accumulation, always make sure the device is sufficiently cooled.

Non-Ex/Ex devices: –20 to 60 °C (–4 to 140 °F)



UL devices: –20 to 50 °C (–4 to 122 °F)

|                     |                              |
|---------------------|------------------------------|
| Storage temperature | –40 to 85 °C (–40 to 185 °F) |
|---------------------|------------------------------|



|                                     |   |
|-------------------------------------|---|
| Altitude                            | < 2 000 m (6 560 ft) above MSL  |
| Climate class                       | As per IEC 60654-1, Class B2  |
| Degree of protection                | DIN rail housing IP 20  |
| Electrical safety                   | Protection class II, overvoltage category II, pollution degree 2  |
| Condensation                        | Not permitted   |
| Electromagnetic compatibility (EMC) | <p><b>CE compliance</b></p> <p>Electromagnetic compatibility in accordance with all the relevant requirements of the IEC/EN 61326 series and NAMUR Recommendation EMC (NE21). For details refer to the EU Declaration of Conformity.</p> <ul style="list-style-type: none"> <li>Maximum measured error &lt; 1% of measuring range</li> <li>Interference immunity as per IEC/EN 61326 series, industrial requirements</li> <li>Interference emission as per IEC/EN 61326 series (CISPR 11) Group 1 Class A</li> </ul> <p> This unit is not intended for use in residential environments and cannot guarantee adequate protection of the radio reception in such environments.</p> |


## Mechanical construction
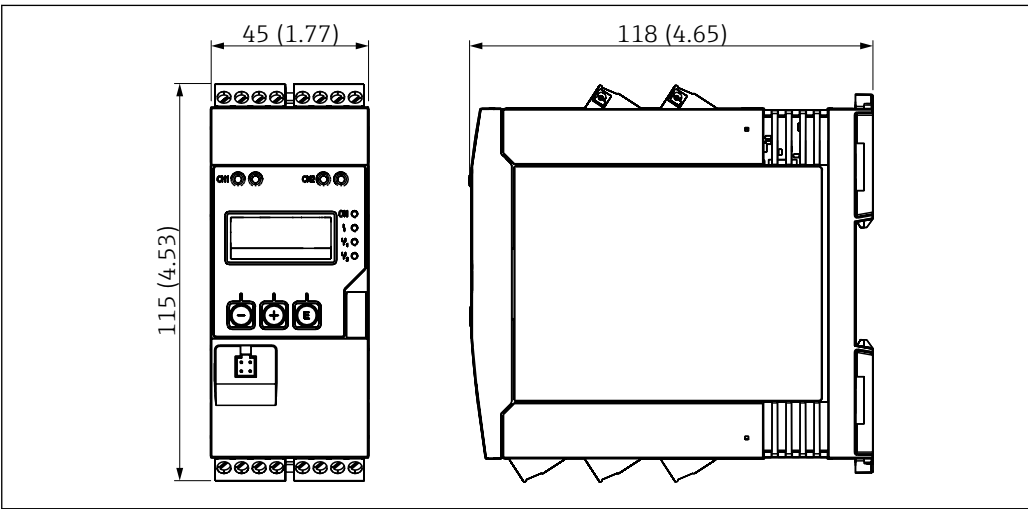
|                    |  |
|--------------------|--|
| Design, dimensions |  <p> 3     Dimensions of the process transmitter in mm (in)</p> <p>A0011792</p> |
|--------------------|--|

|           |   |
|-----------|---|
| Weight    | Approximately 300 g (10.6 oz)   |
| Material  | Housing: plastic PC-GF10  |
| Terminals | Screw terminals, plug-in, 2.5 mm <sup>2</sup> (14 AWG), 0.1 to 4 mm <sup>2</sup> (30 to 12 AWG), torque 0.5 to 0.6 Nm (0.37 to 0.44 lbf ft) |

## Operability


### On-site operation

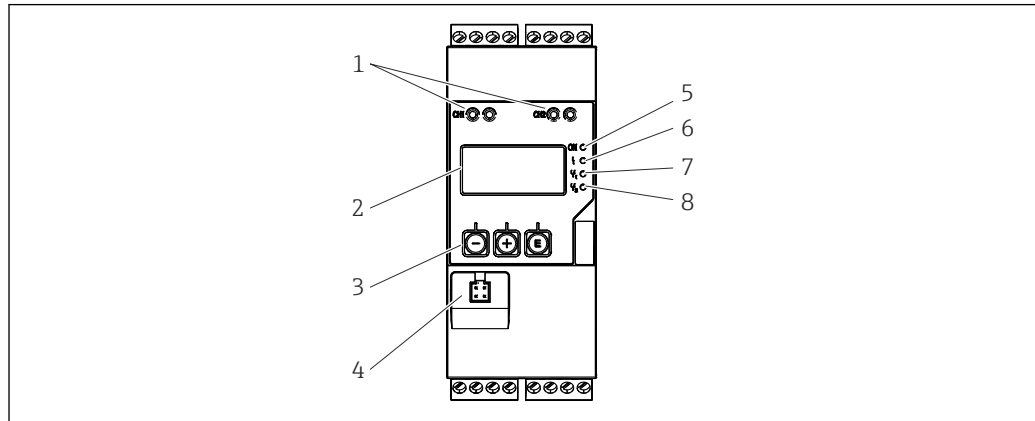

A0011767

4 Display and operating elements of the process transmitter

- 1 HART® connection sockets
- 2 Display
- 3 Operating keys
- 4 PC interface connection socket
- 5 Green LED; on = supply voltage applied
- 6 Red LED; on = fault/alarm
- 7 Yellow LED; on = relay 1 energized
- 8 Yellow LED; on = relay 2 energized

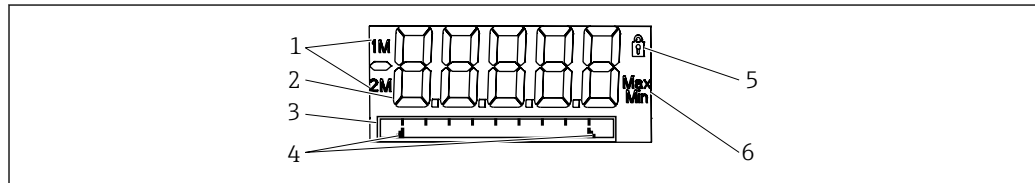

A0011765

5 Display of the process transmitter

- 1 Channel indicator: 1: analog input 1; 2: analog input 2; 1M: calculated value 1; 2M: calculated value 2
- 2 Measured value display
- 3 Dot matrix display for TAG, bar graph, unit
- 4 Limit value indicators in the bar graph
- 5 "Operation locked" indicator
- 6 Minimum/maximum value indicator

### Local display

- Display
  - 5-digit, 7-segment backlit LC display
  - Dot matrix for text/bar graph
- Display area
  - 99999 to +99999 for measured values
- Signaling
  - Setup security locking (lock)
  - Measuring range overshoot/undershoot
  - 2 x status relay (only if the relay option was selected)

### Operating elements

3 keys: -, +, E

### Remote operation

#### Configuration

The device can be configured with the FieldCare PC software. FieldCare Device Setup is included in the Commubox FXA291 and TXU10-AC scope of delivery (see 'Accessories') or can be downloaded free of charge at [www.endress.com](http://www.endress.com).

### Interface

4-pin socket for the connection with a PC via Commubox FXA291 and TXU10-AC interface cable (see 'Accessories').

## Certificates and approvals

Current certificates and approvals for the product are available at [www.endress.com](http://www.endress.com) on the relevant product page:

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Downloads**.

## Ordering information

Detailed ordering information is available from your nearest sales organization [www.addresses.endress.com](http://www.addresses.endress.com) or in the Product Configurator at [www.endress.com](http://www.endress.com):

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Configuration**.



### Product Configurator - the tool for individual product configuration

- Up-to-the-minute configuration data
- Depending on the device: direct input of information specific to the measuring point, such as the measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format
- Ability to order directly in the Endress+Hauser Online Shop

## Accessories

The accessories currently available for the product can be selected at [www.endress.com](http://www.endress.com):

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Spare parts & Accessories**.

---

### Communication-specific accessories

#### Commubox FXA291

Connects Endress+Hauser field devices with a CDI interface (= Endress+Hauser Common Data Interface) and the USB port of a computer or laptop.

For more information, please refer to: [www.endress.com](http://www.endress.com)

#### Configuration kit TXU10

Configuration kit for PC-programmable transmitter - FDT/DTM-based plant asset management tool, FieldCare/DeviceCare, and interface cable (4-pin connector) for PC with USB port.

For more information, please refer to: [www.endress.com](http://www.endress.com)


---

### Online tools

Product information over the entire life cycle of the device: [www.endress.com/onlinetools](http://www.endress.com/onlinetools)

## Documentation

The following types of documentation are available on the product pages and in the Download Area of the Endress+Hauser website ([www.endress.com/downloads](http://www.endress.com/downloads)) (depending on the selected device version):

| Document   | Purpose and content of the document   |
|--|---|
| Technical Information (TI)                           | <b>Planning aid for your device</b><br>The document contains all the technical data on the device and provides an overview of the accessories and other products that can be ordered for the device.  |
| Brief Operating Instructions (KA)                    | <b>Guide that takes you quickly to the 1st measured value</b><br>The Brief Operating Instructions contain all the essential information from incoming acceptance to initial commissioning.  |
| Operating Instructions (BA)                          | <b>Your reference document</b><br>These Operating Instructions contain all the information that is required in the various life cycle phases of the device: from product identification, incoming acceptance and storage, to mounting, connection, operation and commissioning, through to troubleshooting, maintenance and disposal. |
| Description of Device Parameters (GP)                | <b>Reference for your parameters</b><br>The document provides a detailed explanation of each individual parameter. The description is aimed at those who work with the device over the entire life cycle and perform specific configurations.   |
| Safety Instructions (XA)                             | Safety Instructions (XA) are supplied with the device, depending on the approval. These are an integral part of the Operating Instructions.<br> The nameplate indicates which Safety Instructions (XA) apply to the device.                        |
| Supplementary device-dependent documentation (SD/FY) | Always comply strictly with the instructions in the relevant supplementary documentation. The supplementary documentation is an integral part of the device documentation.  |



71705719

[www.addresses.endress.com](http://www.addresses.endress.com)