

# Safety Instructions

## **Memosens COS81E**

Supplement to BA02066C

Safety instructions for electrical apparatus in explosion-hazardous areas



---

# Memosens COS81E

Supplement to BA02066C

## Table of contents

Associated documentation .....	4
Supplementary documentation .....	4
Identification .....	4
Safety instructions .....	4
Type code .....	5
Temperature table .....	5
Connection .....	5
Installation conditions .....	6

**Associated documentation** This document is an integral part of Operating Instructions BA02066C.

**Supplementary documentation**



- Competence Brochure CP00021Z
- Explosion Protection: Guidelines and General Principles
  - [www.endress.com](http://www.endress.com)

**Identification**

The nameplate provides you with the following information on your device:

- Manufacturer identification
- Order code
- Extended order code
- Serial number
- Safety information and warnings
- Ex marking on hazardous area versions

► Compare the information on the nameplate with the order.

**Ex-approval**

**JapanEx**

Ex ia op is IIC T6... T3 Ga

Ex ia op is IIIC T90°C... T200°C Da

The product meets the requirements of the Regulation on the Testing of Machinery and other Instruments set down by the Ministry of Health, Labor and Welfare in Japan.

**Safety instructions**

The Memosens COS81E oxygen sensor is suitable for use in hazardous areas in accordance with: JPN type-examination certificate **CML 21JPN2324X** including appendices


- A maximum ambient temperature of 90 °C (194 °F) must not be exceeded at the sensor head.
- Oxygen sensors for use in hazardous areas have a special conductive O-ring. The electrical connection of the metallic sensor shaft to the conductive mounting location (such as a metallic assembly) is via the O-ring.
- Appropriate measures must be taken to connect the assembly or the mounting location to ground in accordance with the Ex guidelines.
- The sensors must not be operated under electrostatically critical process conditions. Avoid strong steam or dust currents that act directly on the connection system.
- The plastic housing may only be cleaned with a damp cloth.
- Ex versions of digital sensors with Memosens technology are identified by an orange-red ring on the plug-in head.
- The maximum permitted cable length between the sensor and transmitter is 100 m (330 ft).
- When using devices and sensors, observe the regulations for electrical systems in hazardous areas (e.g. JNIOH-TR-NO. 44).
- This device was developed and manufactured in accordance with Directive 2014/34/EU dated February 26, 2014 and also complies with the following standards:
  - JNIOH-TR-46-1:2015 "Equipment – General requirements"
  - JNIOH-TR-46-6:2015 "Equipment protection by intrinsic safety "i" "
  - IEC 60079-28:2015 Explosive atmospheres - Part 28: Protection of equipment and transmission systems using optical radiation
- Sensors containing parts made of titanium or other light metals must be protected against impact.

Type code

Memosens	COS81E-aabbccdde+g	
	aa	Approval (no ex-relevance) <b>JF:</b> Ex ia op is IIC T6 ... T3 Ga <b>J5:</b> ▪ Ex ia op is IIC T6 ... T3 Ga ▪ Ex ia op is IIIC T90°C... T200°C Da
	bb	Measuring range (no ex-relevance)
	cc	Cap characteristics AC = Stainless steel C-shape AU = Stainless steel U-shape BC = Titanium C-shape BU = Titanium U-shape CC = Alloy C22 C-shape CU = Alloy C22 U-shape YY = Special version
	dd	Sensor length (no ex-relevance) max. 600 mm
	e	Material of O-ring (in the cap) (no ex-relevance)
	g	Optional = one or more characters determining optional features (no ex-relevance), e.g. test or other certificates/declarations

Temperature table

Sensor	Process temperature $T_p$	Ambient temperature $T_a$
COS81E	-15 ≤ $T_p$ ≤ 130 °C (T3 rep. T200 °C) -15 ≤ $T_p$ ≤ 120 °C (T4 rep. T135 °C) -15 ≤ $T_p$ ≤ 70 °C (T6 rep. T90°C)	-25 ≤ $T_a$ ≤ 70 °C (T3 rep. T200 °C) -25 ≤ $T_a$ ≤ 90 °C (T4 rep. T135 °C) -25 ≤ $T_a$ ≤ 70 °C (T6 rep. T90°C)

The above temperature table applies only under the following installation conditions, which are described in the following graphic →  6. If the installation conditions cannot be met, the maximum process temperature  $T_p$  must not exceed the maximum ambient temperature  $T_a$ .

Connection

Ex specification

- The Memosens COS81E oxygen sensor is approved in accordance with the JPN type-examination certificate CML 21JPN2324X and suitable for use in hazardous environments.
- The customer must apply the yellow / black stick-on label (included in the product packaging) next to the installed sensor (e.g. on the installed cable)
- The approved Memosens COS81E digital oxygen sensor has an intrinsically safe input with the following parameter set:

Parameter	Value
$P_1$	180 mW


The approved Memosens COS81E digital oxygen sensor uses inherently safe optical radiation:

Parameter	Value
$P_{opt}$ (sensor signal)	≤15 mW

The approved Memosens COS81E digital oxygen sensor must be connected to a Memosens cable or cable transmitter with intrinsically safe output with the following parameter:

Parameter	Value
$P_o$	max. 180 mW

## Installation conditions

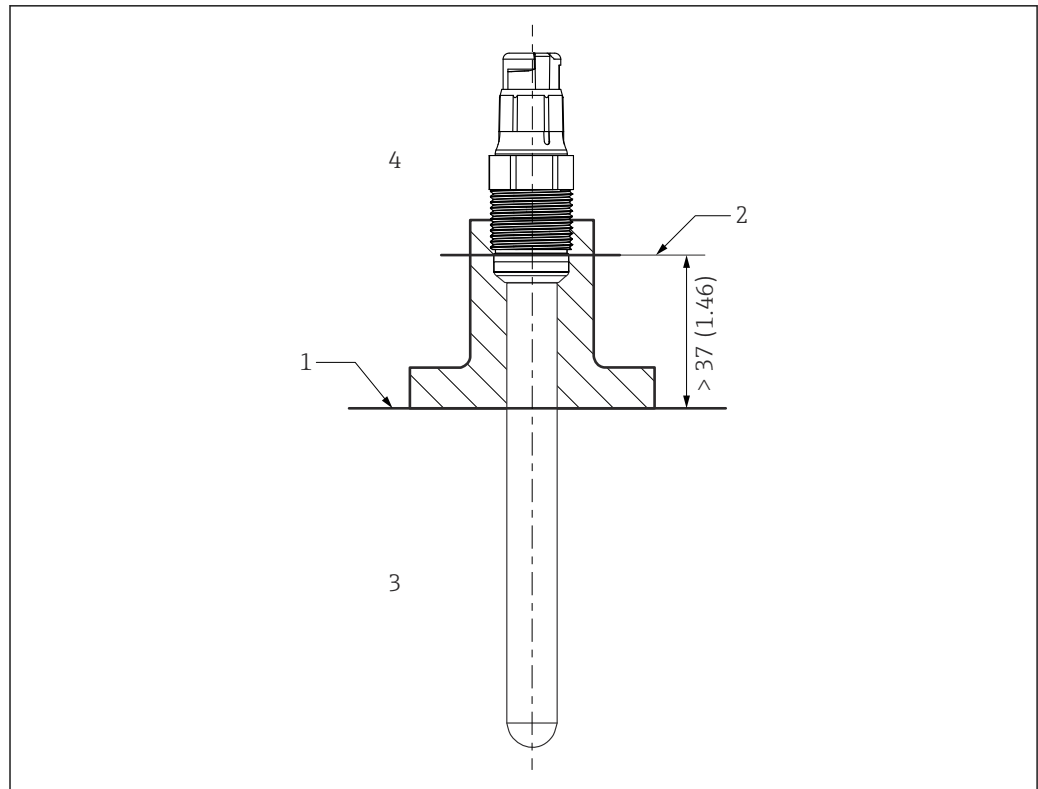

A0041281

## 1 Installation conditions

- 1 Limit
- 2 Distance between plug-in head (lower edge) and process medium, without ring and thrust collar
- 3 Process temperature range  $T_p$
- 4 Ambient temperature range  $T_a$

---



[www.addresses.endress.com](http://www.addresses.endress.com)

---