

# Safety Instructions

## Liquiphant M, Liquiphant S

## FTL50(H), FTL51(H), FTL51C,

## FTL70/71

ATEX, IECEx: Ex db eb IIC Ga/Gb



---

# Liquiphant M, Liquiphant S

## FTL50(H), FTL51(H), FTL51C, FTL70/71

### Table of contents

About this document .....	4
Associated documentation .....	4
Supplementary documentation .....	4
Manufacturer's certificates .....	4
Manufacturer address .....	5
Other standards .....	5
Extended order code .....	5
Safety instructions: General .....	10
Safety instructions: Special conditions .....	11
Safety instructions: Installation .....	12
Safety instructions: Ex d joints .....	13
Explosion protection with heat insulation .....	13
Temperature tables .....	14
Connection data .....	29

**About this document**

This document has been translated into several languages. Legally determined is solely the English source text.

The document translated into EU languages is available:

- In the download area of the Endress+Hauser website:  
[www.endress.com](http://www.endress.com) -> Downloads -> Manuals and Datasheets ->  
Type: Ex Safety Instruction (XA) -> Text Search: ...
- In the Device Viewer: [www.endress.com](http://www.endress.com) -> Product tools ->  
Access device specific information -> Check device features



If not yet available, the document can be ordered.

**Associated documentation**

This document is an integral part of the following Operating Instructions:

- KA00143F/00, KA00163F/00 (FTL50, FTL51)
- KA00144F/00, KA00164F/00 (FTL50H, FTL51H)
- KA00162F/00, KA00165F/00 (FTL51C)
- KA00172F/00, KA00173F/00 (FTL70, FTL71)

**Supplementary documentation**

Explosion-protection brochure: CP00021Z/11

The Explosion-protection brochure is available:

- In the download area of the Endress+Hauser website:  
[www.endress.com](http://www.endress.com) -> Downloads -> Brochures and Catalogs ->  
Text Search: CP00021Z
- On the CD for devices with CD-based documentation

**Manufacturer's certificates****EU Declaration of Conformity**

Declaration Number:

EC\_00455

The EU Declaration of Conformity is available:

In the download area of the Endress+Hauser website:

[www.endress.com](http://www.endress.com) -> Downloads -> Declaration ->  
Type: EU Declaration -> Product Code: ...

**EU type-examination certificate**

Certificate number:

DEKRA 15 ATEX 0088 X

List of applied standards: See EU Declaration of Conformity.

## IEC Declaration of Conformity

Certificate number:  
IECEx DEK 15.0060X

Affixing the certificate number certifies conformity with the following standards (depending on the device version):

- IEC 60079-0 : 2017
- IEC 60079-1 : 2014
- IEC 60079-7 : 2017
- IEC 60079-26 : 2021

**Manufacturer address**  
Endress+Hauser SE+Co. KG  
Hauptstraße 1  
79689 Maulburg, Germany

Address of the manufacturing plant: See nameplate.

**Other standards** Among other things, the following standards shall be observed in their current version for proper installation:  

- IEC/EN 60079-14: "Explosive atmospheres - Part 14: Electrical installations design, selection and erection"
- EN 1127-1: "Explosive atmospheres - Explosion prevention and protection - Part 1: Basic concepts and methodology"

**Extended order code** The extended order code is indicated on the nameplate, which is affixed to the device in such a way that it is clearly visible. Additional information about the nameplate is provided in the associated Operating Instructions.

### Structure of the extended order code

FTL5x(x), FTL7x	-	*****	+	A*B*C*D*E*F*G*..
(Device type)		(Basic specifications)		(Optional specifications)

\* = Placeholder

At this position, an option (number or letter) selected from the specification is displayed instead of the placeholders.

### *Basic specifications*

The features that are absolutely essential for the device (mandatory features) are specified in the basic specifications. The number of positions depends on the number of features available.

The selected option of a feature can consist of several positions.

### *Optional specifications*

The optional specifications describe additional features for the device (optional features). The number of positions depends on the number of features available. The features have a 2-digit structure to aid identification (e.g. JA). The first digit (ID) stands for the feature group and consists of a number or a letter (e.g. J = Test, Certificate). The second digit constitutes the value that stands for the feature within the group (e.g. A = 3.1 material (wetted parts), inspection certificate).

More detailed information about the device is provided in the following tables. These tables describe the individual positions and IDs in the extended order code which are relevant to hazardous locations.

### **Extended order code: Liquiphant M**

-  The following specifications reproduce an extract from the product structure and are used to assign:
- This documentation to the device (using the extended order code on the nameplate).
  - The device options cited in the document.

### *Device type*

FTL50, FTL50H, FTL51, FTL51H, FTL51C

### *Basic specifications*

<b>Position 1 (Approval)</b>		
<b>Selected option</b>	<b>Description</b>	
FTL50(H) FTL51(H)	E	ATEX II 1/2 G Ex db eb IIC T6...T1 Ga/Gb
	I	ATEX II 1/2 G Ex db eb IIC T6...T1 Ga/Gb IECEx Ex db eb IIC T6...T1 Ga/Gb
FTL51C	E <sup>1)</sup>	ATEX II 1/2 G Ex db eb IIC T6...T1 Ga/Gb IECEx Ex db eb IIC T6...T1 Ga/Gb
	3 <sup>2)</sup>	ATEX II 1/2 G Ex db eb IIB T6...T1 Ga/Gb IECEx Ex db eb IIB T6...T1 Ga/Gb

1) Only in connection with Position 5, 6 = xN, xS

2) Only in connection with Position 5, 6 = xL, xM, xK

Position 5, 6 (Probe Length, Type)		
Selected option		Description
FTL50	Ax	Compact
	Ix	Compact; temp. separator
	Qx	Compact; press.tight feed through
FTL50H	Ax	Compact
	Ix	Compact; temp. separator
	Qx	Compact; press.tight feed through
	xC	Ra <1.5 µm
	xF	Ra <0.76 µm
FTL51	BB, CB, DB	..... mm/in; 316L
	BE, CE, DE	..... mm/in; Alloy
	JB, KB, LB	..... mm/in; 316L + temp. separator
	JE, KE, LE	..... mm/in; Alloy + temp. separator
	RB, SB, TB	..... mm/in; 316L + press.tight feed through
	RE, SE, TE	..... mm/in; Alloy + press.tight feed through
FTL51H	Bx, Cx, Dx	..... mm/in
	Jx, Kx, Lx	..... mm/in; temp. separator
	Rx, Sx, Tx	..... mm/in; press.tight feed through
	xC	Ra <1.5 µm
	xF	Ra <0.76 µm
FTL51C	xK	ECTFE
	xL	PFA (Edlon)
	xM	PFA (RubyRed)
	xN	PFA (conductive)
	xS	Enamel

Position 7 (Electronics, Output)		
Selected option		Description
FTL50(H)	A	FEL50A; PROFIBUS PA
FTL51(H)	D	FEL50D; Density/Concentration, density electronics w/o WHG approval
FTL51C		
	1	FEL51; SIL 2-wire 19-253 VAC
	2	FEL52; SIL 3-wire PNP 10-55 VDC
	4	FEL54; SIL relay DPDT 19-253 VAC, 19-55 VDC
	5	FEL55; SIL 8/16 mA, 11-36 VDC
	6	FEL56; SIL NAMUR (L-H signal)
	7	FEL57; SIL 2-wire PFM
	8	FEL58; SIL NAMUR+test button (H-L signal)

Position 8, 9 (Housing, Cable Entry)		
Selected option		Description
FTL50(H)	x7	T13; Alu, coated.; separate conn. compartment
FTL51(H)		
FTL51C	Ex	NPT thread
	Fx	G 1/2 thread
	Gx	M20 gland

Position 11 (Additional Option 2)		
Selected option		Description
FTL51C	A	Not selected
	B	Temp. separator
	C	2nd line of defence (press.tight feed through)

#### *Optional specifications*

No options specific to hazardous locations are available.

## Extended order code: Liquiphant S



The following specifications reproduce an extract from the product structure and are used to assign:

- This documentation to the device (using the extended order code on the nameplate).
- The device options cited in the document.

### *Device type*

FTL70, FTL71

### *Basic specifications*

Position 1 (Approval)	
Selected option	Description
FTL7x      E	ATEX II 1/2 G Ex db eb IIC T6...T1 Ga/Gb IECEx Ex db eb IIC T6...T1 Ga/Gb

### *Position 5, 6 (Probe Length, Type)*

Selected option	Description
FTL70      AB	Compact; 316L
	AE      Compact; Alloy
FTL71      xB	..... mm/in; 316L
	xE      ..... mm/in; Alloy

### *Position 7 (Electronics, Output)*

Selected option	Description
FTL7x      A	FEL50A; PROFIBUS PA
	1      FEL51; SIL 2-wire 19-253 VAC
	2      FEL52; SIL 3-wire PNP 10-55 VDC
	4      FEL54; SIL relay DPDT 19-253 VAC, 19-55 VDC
	5      FEL55; SIL 8/16 mA, 11-36 VDC
	6      FEL56; SIL NAMUR (L-H signal)
	7      FEL57; SIL 2-wire PFM
	8      FEL58; SIL NAMUR+test button (H-L signal)
	9      Special version: FEL50D

Position 8, 9 (Housing, Cable Entry)		
Selected option	Description	
FTL7x	x7	T13; Alu, coated.; separate conn. compartment
	Ex	NPT thread
	Fx	G 1/2 thread
	Gx	M20 gland

Position 11 (Application)		
Selected option	Description	
FTL7x	L	230 °C, gas-tight feed through
	N	280 °C, gas-tight feed through
	Y	Special version: 300 °C

### *Optional specifications*

No options specific to hazardous locations are available.

### Safety instructions: General

- The device is intended to be used in explosive atmospheres as defined in the scope of IEC 60079-0 or equivalent national standards. If no potentially explosive atmospheres are present or if additional protective measures have been taken: The device may be operated according to the manufacturer's specifications.
- Staff must meet the following conditions for mounting, electrical installation, commissioning and maintenance of the device:
  - Be suitably qualified for their role and the tasks they perform
  - Be trained in explosion protection
  - Be familiar with national regulations
- Install the device according to the manufacturer's instructions and national regulations.
- Do not operate the device outside the specified electrical, thermal and mechanical parameters.
- Only use the device in media to which the wetted materials have sufficient durability.
- Avoid electrostatic charging:
  - Of plastic surfaces (e.g. enclosure, sensor element, special varnishing, attached additional plates, ...)
  - Of isolated capacities (e.g. isolated metallic plates)

- Refer to the temperature tables for the relationship between the permitted ambient temperature for the sensor and/or transmitter, depending on the range of application and the temperature class.
- Modifications to the device can affect the explosion protection and must be carried out by staff authorized to perform such work by Endress+Hauser.
- The probe is made of stainless steel or high corrosion-resistant alloy of thickness  $\geq 1$  mm.

**Safety  
instructions:  
Special conditions**

- Limitations of the maximum ambient temperature at the electronics enclosure may be required dependent on device configuration, process temperatures and temperature classification.
- Details of limitations: → 14, "Temperature tables".
- To avoid electrostatic charging: Do not rub surfaces with a dry cloth.
- In the event of additional or alternative special varnishing on the enclosure or other metal parts or for adhesive plates:
  - Observe the danger of electrostatic charging and discharge.
  - Do not install in the vicinity of processes ( $\leq 0.5$  m) generating strong electrostatic charges.

*Basic specification, Position 8, 9 = x7*


Avoid sparks caused by impact and friction.

**Device group IIC**

*Device type FTL51C*

- Sensors coated with non-conductive material can be used if avoiding electrostatic charging (e.g. through friction, cleaning, maintenance, strong medium flow).
- Marked with warning sign: "Avoid electrostatic charging".

**Safety  
instructions:  
Installation**

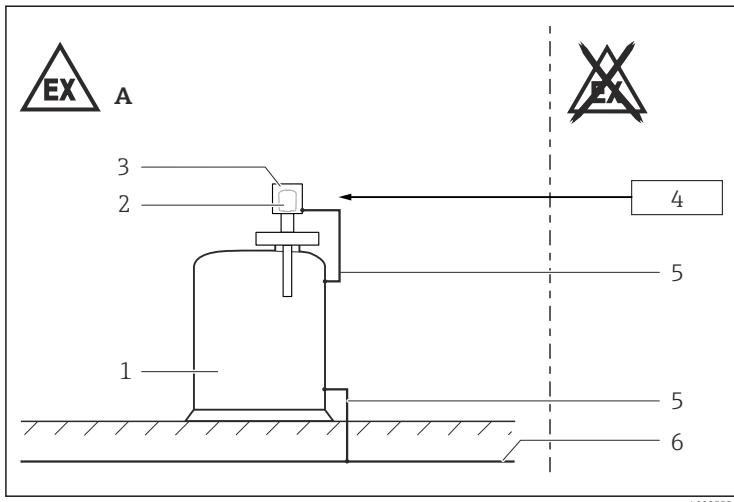

A0025536

1

- A Zone 1  
 1 Tank; Zone 0, Zone 1  
 2 Electronic insert  
 3 Enclosure  
 4 Supply unit  
 5 Potential equalization line  
 6 Local potential equalization

- In potentially explosive atmospheres:
  - Do not disconnect the electrical connection of the power supply circuit when energized.
  - Do not open the connection compartment cover and the electronics compartment cover when energized.
- Perform the following to achieve the degree of protection IP66/68:
  - Screw the cover tight.
  - Mount the cable entry correctly.
- Observe the maximum process conditions according to the manufacturer's Operating Instructions.
- At high medium temperatures, note flange pressure load capacity as a factor of temperature.
- Install the device to exclude any mechanical damage or friction during the application. Pay particular attention to flow conditions and tank fittings.
- Connect the device:
  - Using suitable cable and wire entries of protection type "Increased safety (Ex eb)".
  - Using piping systems of protection type "Increased safety (Ex eb)".
- Continuous service temperature of the connecting cable:  $\geq T_a + 5 K$ .

- Support extension tube of the device if a dynamic load is expected.
- Only use certified cable entries suitable for the application. Observe national regulations and standards. Accordingly, the connection terminal does not include any ignition sources.
- Seal unused entry glands with approved sealing plugs that correspond to the type of protection.
- When operating the transmitter enclosure at an ambient temperature under -20 °C, use appropriate cables and cable entries permitted for this application.
- Before operation:
  - Screw in the cover all the way.
  - Tighten the securing clamp on the cover.

<i>Basic specification, Position 7</i>	<i>Cross section connecting wire</i>	<i>Tightening torque of terminal screw</i>	<i>Stripped insulation</i>
A, D, 1, 2, 5, 6, 7, 8, 9	≤ 2.5 mm <sup>2</sup>	0.4 Nm	6 to 8 mm
4	0.5 to 2.5 mm <sup>2</sup>	-	8 to 9 mm

### **Accessory high pressure sliding sleeve**

The high pressure sliding sleeve can be used for a continuous setting of the switch point and is suited for zone separation if mounted properly (see Operating Instructions).

### **Potential equalization**

Integrate the device into the local potential equalization.


### **Safety instructions: Ex d joints**

### **Explosion protection with heat insulation**

- If required or if in doubt: ask manufacturer for specifications.
- Flameproof joints are not intended to be repaired.

*Device type FTL70, FTL71, Basic specification, Position 11 = L, N, Y*

- While observing the "temperature derating", the device is suitable for process temperatures up to 300 °C.
- When operating, ensure that you rule out contact between hot component surfaces and potentially explosive atmospheres beyond the limits of the corresponding temperature class. Suitable measures: e.g. thermal insulation at container and/or pipes.
- The temperature of 85 °C specified at the reference point may not be exceeded.
- To protect the electronics, observe the specified ambient temperature at the electronics enclosure.

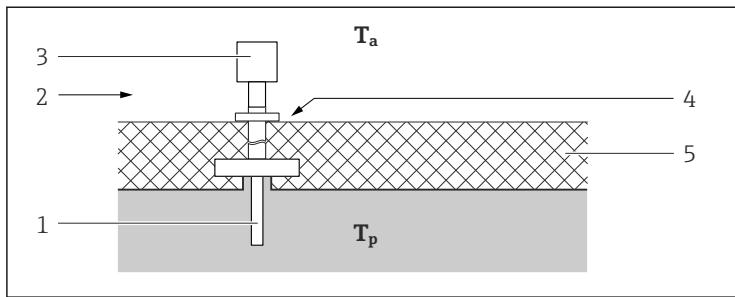

A0025541

2

- $T_a$  Ambient temperature
- $T_p$  Process temperature
- 1 Sensor
- 2 Temperature class, e.g. T6
- 3 Enclosure
- 4 Reference point: max. +85 °C
- 5 E.g. thermal insulation

## Temperature tables

### Description notes



Unless otherwise indicated, the positions always refer to the basic specification.

*Device type FTL50, FTL50H, FTL51, FTL51H*

1st column: Position 5, 6 = Ax, Bx, ...

*Device type FTL51C, FTL70, FTL71*

1st column: Position 11 = A, B, ...


2nd column: Maximum load current

3rd column: Temperature classes T6 (85 °C) to T1 (450 °C)


Column P1 to P5: Position (temperature value) on the axes of the derating

- $T_a$ : Ambient temperature in °C

- $T_p$ : Process temperature in °C

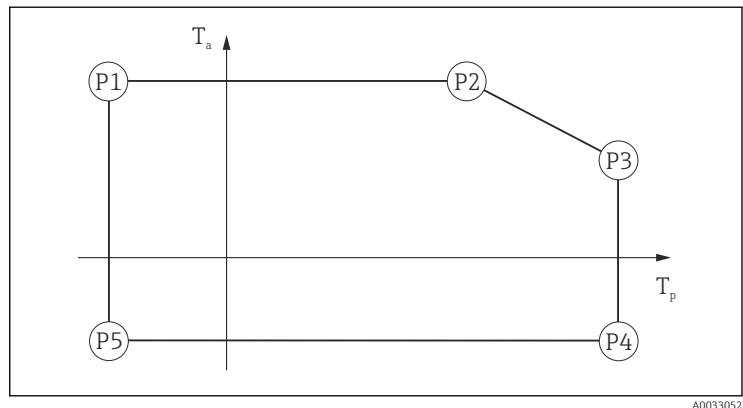

A0033052

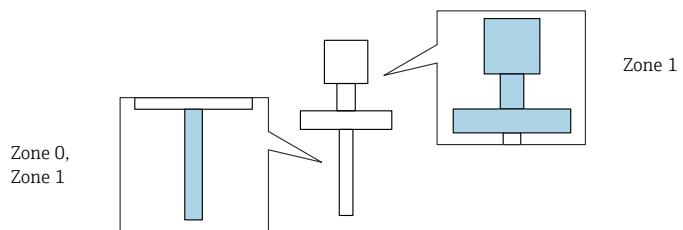**Zone 0, Zone 1**

*Device type FTL50, FTL50H, FTL51, FTL51H*

*Position 7 = 1*

		P1		P2		P3		P4		P5	
		T <sub>p</sub>	T <sub>a</sub>								
FTL50, FTL50H: Ax FTL51, FTL51H: Bx, Cx, Dx	180 mA										
		T6	-50	59	70	59	80	59	80	-40	-50
		T5	-50	70	70	70	95	70	95	-40	-50
		T4	-50	70	70	70	130	70	130	-40	-50
		T3...T1	-50	70	70	70	150	69	150	-40	-50
FTL50, FTL50H: Ix, Qx FTL51, FTL51H: Jx, Kx, Lx, Rx, Sx, Tx	180 mA										
		T6	-50	62	70	62	80	62	80	-40	-50
		T5	-50	70	70	70	95	70	95	-40	-50
		T4	-50	70	70	70	130	70	130	-40	-50
		T3...T1	-50	70	70	70	150	70	150	-40	-50
	350 mA										
	T4	-50	70	70	70	130	55	130	-40	-50	
	T3...T1	-50	70	70	70	150	54	150	-40	-50	

*Position 7 = 2*

		P1		P2		P3		P4		P5	
		T <sub>p</sub>	T <sub>a</sub>								
FTL50, FTL50H: Ax FTL51, FTL51H: Bx, Cx, Dx	<b>350 mA</b>										
		T6	-50	50	70	50	75	50	75	-40	-50
		T5	-50	70	70	70	95	60	95	-40	-50
		T4	-50	70	70	70	130	66	130	-40	-50
		T3...T1	-50	70	70	70	150	54	150	-40	-50
FTL50, FTL50H: Ix, Qx FTL51, FTL51H: Jx, Kx, Lx, Rx, Sx, Tx	<b>350 mA</b>										
		T6	-50	50	70	50	75	50	75	-40	-50
		T5	-50	70	70	70	95	65	95	-40	-50
		T4	-50	70	70	70	130	70	130	-40	-50
		T3...T1	-50	70	70	70	150	70	150	-40	-50

*Position 7 = 4*

		P1 T <sub>p</sub>		P2 T <sub>p</sub>		P3 T <sub>p</sub>		P4 T <sub>p</sub>		P5 T <sub>p</sub>	
FTL50, FTL50H: Ax FTL51, FTL51H: Bx, Cx, Dx	2 A										
FTL50, FTL50H: Ix, Qx FTL51, FTL51H: Jx, Kx, Lx, Rx, Sx, Tx	2 A	T6	-50	55	55	55	80	50	80	-40	-50
		T5	-50	70	70	70	95	65	95	-40	-50
		T4	-50	70	70	70	130	65	130	-40	-50
		T3...T1	-50	70	70	70	150	65	150	-40	-50
FTL50, FTL50H: Ix, Qx FTL51, FTL51H: Jx, Kx, Lx, Rx, Sx, Tx	2 A	T6	-50	55	55	55	80	54	80	-40	-50
		T5	-50	70	70	70	95	68	95	-40	-50
		T4	-50	70	70	70	130	70	130	-40	-50
		T3...T1	-50	70	70	70	150	70	150	-40	-50
	4 A										
		T6	-50	45	45	45	80	44	80	-40	-50
		T5	-50	60	60	60	95	59	95	-40	-50
		T4	-50	67	67	67	130	63	130	-40	-50
		T3...T1	-50	67	67	67	150	62	150	-40	-50

*Position 7 = A, 5, 6, 7, 8*

		P1		P2		P3		P4		P5	
		T <sub>p</sub>	T <sub>a</sub>								
FTL50, FTL50H: Ax, Ix, Qx FTL51, FTL51H: Bx, Cx, Dx, Jx, Kx, Lx, Rx, Sx, Tx											
	T6	-50	70	75	70	80	65	80	-40	-50	-40
	T5	-50	70	95	70	95	70	95	-40	-50	-40
	T4	-50	70	130	70	130	70	130	-40	-50	-40
	T3...T1	-50	70	150	70	150	70	150	-40	-50	-40

*Position 7 = D*

		P1		P2		P3		P4		P5	
		T <sub>p</sub>	T <sub>a</sub>								
FTL50, FTL50H: Ax, Ix, Qx FTL51, FTL51H: Bx, Cx, Dx, Jx, Kx, Lx, Rx, Sx, Tx											
	T6...T1	-50	70	75	70	80	65	80	-40	-50	-40

*Device type FTL51C**Position 7 = 1*

		P1		P2		P3		P4		P5	
		T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>
A	180 mA										
	T6	-50	59	70	59	80	59	80	-40	-50	-40
	T5	-50	70	70	70	95	70	95	-40	-50	-40
	T4	-50	70	70	70	130 120 <sup>1)</sup>	70	130 120 <sup>1)</sup>	-40	-50	-40
	T3...T1	-50	70	70	70	150 120 <sup>1)</sup>	69	150 120 <sup>1)</sup>	-40	-50	-40
B, C	180 mA										
	T6	-50	62	70	62	80	62	80	-40	-50	-40
	T5	-50	70	70	70	95	70	95	-40	-50	-40
	T4	-50	70	70	70	130 120 <sup>1)</sup>	70	130 120 <sup>1)</sup>	-40	-50	-40
	T3...T1	-50	70	70	70	150 120 <sup>1)</sup>	70	150 120 <sup>1)</sup>	-40	-50	-40
	350 mA										
	T4	-50	70	70	70	130 120 <sup>1)</sup>	55	130 120 <sup>1)</sup>	-40	-50	-40
	T3...T1	-50	70	70	70	150 120 <sup>1)</sup>	54	150 120 <sup>1)</sup>	-40	-50	-40

1) Only in connection with Position 5, 6 = xK

*Position 7 = 2*

		P1		P2		P3		P4		P5	
		T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>
A	350 mA										
		T6	-50	50	70	50	75	50	75	-40	-50
		T5	-50	70	70	70	95	60	95	-40	-50
		T4	-50	70	70	70	130 120 <sup>1)</sup>	66	130 120 <sup>1)</sup>	-40	-50
B, C	350 mA	T3...T1	-50	70	70	70	150 120 <sup>1)</sup>	54	150 120 <sup>1)</sup>	-40	-50
		T6	-50	50	70	50	75	50	75	-40	-50
		T5	-50	70	70	70	95	65	95	-40	-50
		T4	-50	70	70	70	130 120 <sup>1)</sup>	70	130 120 <sup>1)</sup>	-40	-50
		T3...T1	-50	70	70	70	150 120 <sup>1)</sup>	70	150 120 <sup>1)</sup>	-40	-50

1) Only in connection with Position 5, 6 = xK

*Position 7 = 4*

		P1		P2		P3		P4		P5	
		T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>
A	2 A										
		T6	-50	55	55	55	80	50	80	-40	-50
		T5	-50	70	70	70	95	65	95	-40	-50
		T4	-50	70	70	70	130 120 <sup>1)</sup>	65	130 120 <sup>1)</sup>	-40	-50
		T3...T1	-50	70	70	70	150 120 <sup>1)</sup>	65	150 120 <sup>1)</sup>	-40	-50
B, C	2 A										
		T6	-50	55	55	55	80	54	80	-40	-50
		T5	-50	70	70	70	95	68	95	-40	-50
		T4	-50	70	70	70	130 120 <sup>1)</sup>	70	130 120 <sup>1)</sup>	-40	-50
		T3...T1	-50	70	70	70	150 120 <sup>1)</sup>	70	150 120 <sup>1)</sup>	-40	-50
	4 A										
	T6	-50	45	45	45	80	44	80	-40	-50	
	T5	-50	60	60	60	95	59	95	-40	-50	
	T4	-50	67	67	67	130 120 <sup>1)</sup>	63	130 120 <sup>1)</sup>	-40	-50	
	T3...T1	-50	67	67	67	150 120 <sup>1)</sup>	62	150 120 <sup>1)</sup>	-40	-50	

1) Only in connection with Position 5, 6 = xK

*Position 7 = A, 5, 6, 7, 8*

		P1		P2		P3		P4		P5	
		T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>
A, B, C											
	T6	-50	70	75	70	80	65	80	-40	-50	-40
	T5	-50	70	95	70	95	70	95	-40	-50	-40
	T4	-50	70	130 120 <sup>1)</sup>	70	130 120 <sup>1)</sup>	70	130 120 <sup>1)</sup>	-40	-50	-40
	T3...T1	-50	70	150 120 <sup>1)</sup>	70	150 120 <sup>1)</sup>	70	150 120 <sup>1)</sup>	-40	-50	-40

1) Only in connection with Position 5, 6 = xK

*Position 7 = D*

		P1		P2		P3		P4		P5	
		T <sub>p</sub>	T <sub>a</sub>								
A, B, C											
	T6...T1	-50	70	75	70	80	65	80	-40	-50	-40

*Device type FTL70, FTL71*

*Position 7 = 1*

L	180 mA	P1		P2		P3		P4		P5	
		T <sub>p</sub>	T <sub>a</sub>								
T6	180 mA	-60	63	68	63	80	62	80	-40	-60	-40
		-60	70	95	70	95	70	95	-40	-60	-40
		-60	70	130	70	130	70	130	-40	-60	-40
		-60	70	195	70	195	70	195	-40	-60	-40
		-60	70	230	70	230	70	230	-40	-60	-40
	350 mA										
		-60	37	57	37	80	36	80	-40	-60	-40
		-60	52	72	52	95	51	95	-40	-60	-40
		-60	69	69	69	130	66	130	-40	-60	-40
		-60	69	69	69	195	63	195	-40	-60	-40
T2...T1		-60	69	69	69	230	61	230	-40	-60	-40

		P1		P2		P3		P4		P5		
		T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	
N, Y	180 mA											
	350 mA	T6	-60	63	70	63	80	60	80	-40	-60	-40
		T5	-60	70	95	70	95	70	95	-40	-60	-40
		T4	-60	70	130	70	130	70	130	-40	-60	-40
		T3	-60	70	195	70	195	70	195	-40	-60	-40
		T2	-60	70	280	70	280 290 <sup>1)</sup>	70	280 290 <sup>1)</sup>	-40	-60	-40
		T1	-60	70	280	70	280 300 <sup>1)</sup>	67	280 300 <sup>1)</sup>	-40	-60	-40
	350 mA	T6	-60	37	58	37	80	36	80	-40	-60	-40
		T5	-60	52	73	52	95	51	95	-40	-60	-40
		T4	-60	69	69	69	130	66	130	-40	-60	-40
		T3	-60	69	69	69	195	63	195	-40	-60	-40
		T2	-60	69	69	69	280 290 <sup>1)</sup>	62	280 290 <sup>1)</sup>	-40	-60	-40
		T1	-60	69	69	69	280 300 <sup>1)</sup>	59	280 300 <sup>1)</sup>	-40	-60	-40

1) Only in connection with Position 11 = Y

*Position 7 = 2*

			P1		P2		P3		P4		P5	
			T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>
<i>L</i>	<b>350 mA</b>											
		T6	-60	54	71	54	80	53	80	-40	-60	-40
		T5	-60	69	86	69	95	68	95	-40	-60	-40
		T4	-60	70	130	70	130	70	130	-40	-60	-40
		T3	-60	70	133	70	195	67	195	-40	-60	-40
		T2...T1	-60	70	133	70	230	65	230	-40	-60	-40
<i>N, Y</i>	<b>350 mA</b>											
		T6	-60	54	77	54	80	53	80	-40	-60	-40
		T5	-60	69	70	69	95	68	95	-40	-60	-40
		T4	-60	70	130	70	130	70	130	-40	-60	-40
		T3	-60	70	154	70	195	68	195	-40	-60	-40
		T2	-60	70	154	70	280 290 <sup>1)</sup>	65	280 290 <sup>1)</sup>	-40	-60	-40
		T1	-60	70	154	70	280 300 <sup>1)</sup>	65	280 300 <sup>1)</sup>	-40	-60	-40

1) Only in connection with Position 11 = Y

## Position 7 = 4

		P1		P2		P3		P4		P5	
		T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>
<i>L</i>	2 A										
		T6	-60	55	61	55	80	54	80	-40	-60
		T5	-60	70	76	70	95	69	95	-40	-60
		T4	-60	70	130	70	130	70	130	-40	-60
		T3	-60	70	176	70	195	69	195	-40	-60
	4 A	T2...T1	-60	70	176	70	230	67	230	-40	-60
		T6	-60	45	66	45	80	44	80	-40	-60
		T5	-60	60	81	60	95	59	95	-40	-60
		T4	-60	70	124	70	130	69	130	-40	-60
		T3	-60	70	124	70	195	66	195	-40	-60
<i>N, Y</i>	2 A										
		T6	-60	55	62	55	80	54	80	-40	-60
		T5	-60	70	77	70	95	69	95	-40	-60
		T4	-60	70	130	70	130	70	130	-40	-60
		T3	-60	70	195	70	195	70	195	-40	-60
		T2	-60	70	208	70	280 290 <sup>1)</sup>	67	280 290 <sup>1)</sup>	-40	-60
	4 A	T1	-60	70	208	70	280 300 <sup>1)</sup>	66	280 300 <sup>1)</sup>	-40	-60
		T6	-60	45	73	45	80	44	80	-40	-60
		T5	-60	60	88	60	95	59	95	-40	-60
		T4	-60	70	130	70	130	70	130	-40	-60
		T3	-60	70	142	70	195	68	195	-40	-60
		T2	-60	70	142	70	280 290 <sup>1)</sup>	65	280 290 <sup>1)</sup>	-40	-60

1) Only in connection with Position 11 = Y

*Position 7 = A, 5, 6, 7, 8*

		P1		P2		P3		P4		P5		
		T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	T <sub>p</sub>	T <sub>a</sub>	
<i>L</i>												
<i>L</i>		T6	-60	70	80	70	80	70	80	-40	-60	-40
		T5	-60	70	95	70	95	70	95	-40	-60	-40
		T4	-60	70	130	70	130	70	130	-40	-60	-40
		T3	-60	70	195	70	195	70	195	-40	-60	-40
		T2...T1	-60	70	200	70	230	70	230	-40	-60	-40
<i>N, Y</i>												
<i>N, Y</i>		T6	-60	70	80	70	80	70	80	-40	-60	-40
		T5	-60	70	95	70	95	70	95	-40	-60	-40
		T4	-60	70	130	70	130	70	130	-40	-60	-40
		T3	-60	70	195	70	195	70	195	-40	-60	-40
		T2	-60	70	230	70	280 290 <sup>1)</sup>	70	280 290 <sup>1)</sup>	-40	-60	-40
		T1	-60	70	279	70	280 300 <sup>1)</sup>	70	280 300 <sup>1)</sup>	-40	-60	-40

1) Only in connection with Position 11 = Y

*Position 7 = 9*

		P1		P2		P3		P4		P5		
		T <sub>p</sub>	T <sub>a</sub>									
<i>L, N, Y</i>												
		T6...T1	-60	70	80	70	80	70	80	-40	-60	-40

**Connection data**

<i>Basic specification, Position 7</i>		<b>Power supply circuit</b>	<b>Output</b>
A	For connection to a Fieldbus	PROFIBUS PA or FOUNDATION Fieldbus	
D ( <i>FTL5x(H), FTL51C</i> ) 9 ( <i>FTL7x</i> )	Only associated intrinsically safe power supply unit FML621 from Endress+Hauser		
1	U = 19 to 253 V <sub>AC</sub> , 50/60 Hz; max. 0.96 VA	max. 350 mA	
2	U = 10 to 55 V <sub>DC</sub> ; max. 0.83 W	PNP transistor; max. 350 mA	
4	U = 19 to 253 V <sub>AC</sub> , 50/60 Hz or 19 to 55 V <sub>DC</sub> ; max. 1.3 W	2 potential free change-over contacts; 4 A Ex e	
5	U = 11 to 36 V <sub>DC</sub> ; max. 0.6 W	max. 22 mA	
6	U = 4 to 12.5 V <sub>DC</sub> ; max. 0.23 W	NAMUR; max. 3.5 mA	
7	U = max. 16.7 V <sub>DC</sub> ; max. 0.15 W	PFM; max. 12 mA	
8	U = 4 to 12.5 V <sub>DC</sub> ; max. 0.23 W	NAMUR; max. 3.5 mA	

**Cable entry: Connection compartment****Ex eb**Cable gland: *Basic specification, Position 8, 9 = Gx**preferably*

Thread	Clamping range	Material	Sealing insert	O-ring
M20x1,5	ø 7 to 12 mm	1.4404	NBR	EPDM (ø 17x2)

*or alternatively*

Thread	Clamping range	Material	Sealing insert	O-ring
M20x1,5	ø 8 to 10.5 mm <sup>1)</sup> (ø 6.5 to 13 mm) <sup>2)</sup>	Ms, nickel-plated	Silicone	EPDM (ø 17x2)

1) Standard

2) Separate clamping inserts available



- The tightening torque refers to cable glands installed by the manufacturer:
  - Recommended: 3.5 Nm
  - Maximum: 10 Nm
- This value may be different depending on the type of cable. However, the maximum value must not be exceeded.
- Only suitable for fixed installation. The operator must pay attention to a suitable strain relief of the cable.
- The cable glands are suitable for a low risk of mechanical danger (4 Joule) and must be mounted in a protected position if larger impact energy levels are expected.
- To maintain the ingress protection of the enclosure: Install the enclosure cover, cable glands and blind plugs correctly.

---



71543755

[www.addresses.endress.com](http://www.addresses.endress.com)

---