

Hazardous (Classified) Location  
 Class I / Division 1, 2 / Groups ABCD  
 Class I / Zone 0 / IIC T6/T5/T4  
 Class II / Division 1, 2 / Groups EFG  
 Class III

Nonhazardous Locations

### Installation Notes RIA14




**Class I / Div. 1 / Groups ABCD**


**Class II, III / Div. 1 / Groups EFG**

**EXPLOSION PROOF  
 DUST IGNITION PROOF**


- CSA certified apparatus must be installed in accordance with manufacturer's instructions.
- Installation must be in accordance with Canadian Electrical Code.
- Use supply wires suitable for 5°C above surroundings.
- Conduit seal required at 18".
- All Conduits must be assembled with a minimum of five full threads engagement.
- A dust tight seal must be used for conduit entry when the field display is used in a Class II or Class III location.
- Keep tight when circuits alive.
- Warning: Substitution of components may impair suitability for Class I, Division 2.
- Warning: Do not disconnect equipment unless power has been switched off or the area is known to be non-hazardous.
- Supply circuit (Terminals + and 1)
  - $V_{max} \leq 35 \text{ V DC}$
  - $P_{max} = 1.75 \text{ W}$
- Open Collector (Terminals 2 and 3)
  - $V_{max} \leq 35 \text{ V DC}$
  - $P_{max} \leq 875 \text{ mW}$

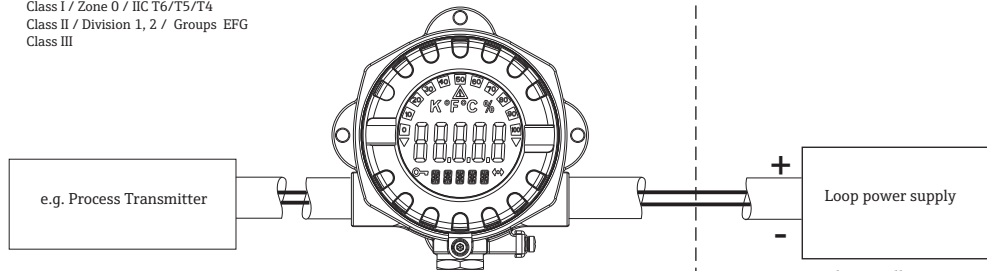

see also installation notes for using power supply

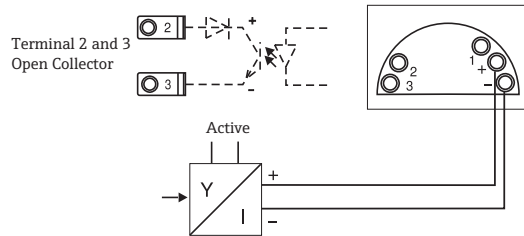

Connecting a active current source  
 e.g. a sensor with ist own power supply and active current output

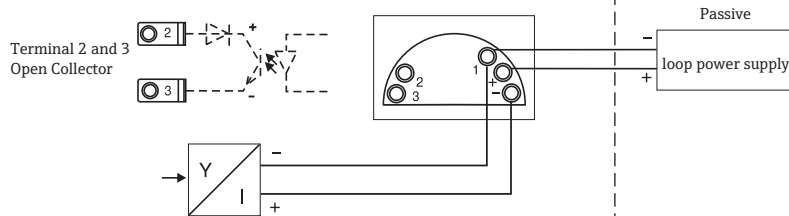

Connecting a passive current source  
 e.g. 2-wire transmitter with additional loop power supply


### Temperature range

- T4 -40°C ... +80°C
- T5 -40°C ... +70°C
- T6 -40°C ... +55°C


	Approved Pfanzelt	Date (yyyy-mm-dd) 2008-12-08	Drawing No. 12 07 00 114	Dwg.rev. -	Revision no. -	Revision date (yyyy-mm-dd) -	Name -	Material 71540269 XA02309R/09/EN/01.20	<b>Endress+Hauser</b>
Volume (mm³)	Designed Pfanzelt	Date (yyyy-mm-dd) 2005-03-24	Unit RIA14	Scale 1:1	Title CONTROL DRAWING CSA Explosionproof		Series		
Refer to protection notice ISO 16016	Edge of working parts ISO 13715	Geometrical tolerancing ISO 2768-mH-E	Part No. -	Format A4	Objekt version	Sheet 1 of 2	Endress + Hauser Wetzer GmbH+Co. KG Nesselwang / Germany		

Hazardous (Classified) Location  
 Class I / Zone 2 / Ex nA IIC  
 Class II, III/Division 1/ Groups EFG


Nonhazardous Locations

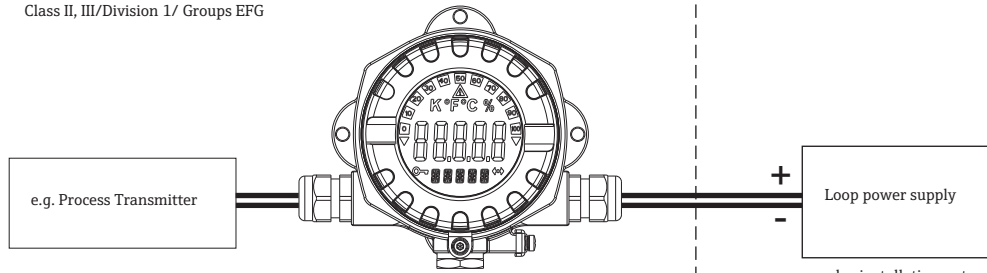

see also installation notes  
 for using power supply

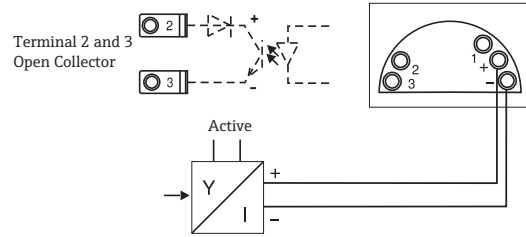

Connecting a active current source  
 e.g. a sensor with ist own power supply and active current output

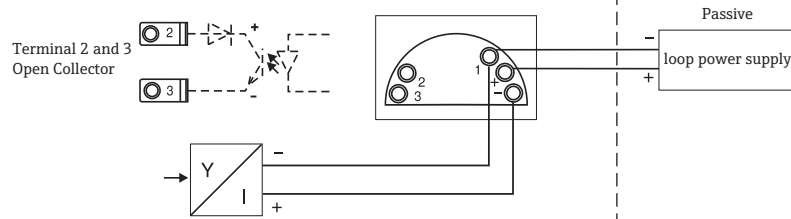

Connecting a passive current source  
 e.g. 2-wire transmitter with additional loop power supply

### Installation Notes RIA14

- CSA certified apparatus must be installed in accordance with manufacturer's instructions.
- Installation must be in accordance with Canadian Electrical Code (CEC) Section 18.
- Use supply wires suitable for 5°C above surroundings.
- A dust tight seal must be used for conduit entry when the field display is used in a Class II or Class III location.
- The device for Class I, Zone 2, Ex nA IIC is suitable for installation in Class I, Division 2, Groups A, B, C, D per CEC Section 18-000 Subrule (5).
- Warning: Substitution of components may impair suitability for Class I, Division 2.
- Warning: Do not disconnect equipment unless power has been switched off or the area is known to be non-hazardous.

### NONINCENDIVE

**Class I / Zone 2 / Ex nA IIC**

- Intrinsic safety barrier not required.
- Supply circuit (Terminals + and 1)  
 Supply voltage  $\leq 35$  V DC    Signal current: 4-20mA
- Open Collector (Terminals 2 and 3)  
 Supply voltage  $\leq 35$  V DC, max. 100mA

### NONINCENDIVE, FIELD WIRING

**Class I / Zone 2 / Ex nA IIC**

The Nonincendive Field Wiring Circuit Concept allows interconnection of Nonincendive Field Wiring Apparatus with Associated Nonincendive Field Wiring Apparatus or Associated Intrinsically Safe Apparatus or Associated Apparatus not specifically examined in combination as a system using any of the wiring methods permitted for unclassified locations, when  $V_{oc} \leq V_{max}$ ,  $C_a \geq C_i + C_{cable}$ ,  $L_a \geq L_i + L_{cable}$ .  
 Transmitter Nonincendive Field Wiring parameters are as follows:

- Supply circuit (Terminals + and 1)  
 $V_{max} \leq 35$  V DC     $C_i = 0$ ,  $L_i = 0$   
 $I_{max}$  = see following note below  
 $P_{max} = 1.75$  W
- Open Collector (Terminals 2 and 3)  
 $V_{max} \leq 35$  V DC     $C_i = \text{negligible small}$ ,  $L_i = 0$   
 $I_{max} \leq$  see following note below  
 $P_{max} \leq 875$  mW

For these current controlled circuits, the parameter  $I_{max}$  is not required and need not to be aligned with parameter  $I_{sc}$  and  $I_t$  of the Associated Nonincendive Field Wiring Apparatus or Associated Apparatus.

### Temperature range

- T4    -40°C ... +80°C
- T5    -40°C ... +70°C
- T6    -40°C ... +55°C

	Approved Pfanzelt	Date (yyyy-mm-dd) 2008-12-08	Drawing No. 12 07 00 114	Dwg.rev. -	Revision no. -	Revision date (yyyy-mm-dd) -	Name -	Material 71540269 XA02309R/09/EN/01.20	Endress+Hauser
Volume (mm³)	Designed Pfanzelt	Date (yyyy-mm-dd) 2008-12-05	Unit RIA14	Scale 1:1	Title CONTROL DRAWING CSA Nonincendive			Series	
Refer to protection notice ISO 16016	Edge of working parts ISO 13715	Geometrical tolerancing ISO 2768-mH-E	Part No. -	Format A4	Objekt version	Sheet 2 of 2	Endress + Hauser Wetzer GmbH+Co. KG    Nesselwang / Germany		