

Safety Instructions

RIA45, ORIA45

ATEX: II (1)G [Ex ia Ga] IIC
II (1)D [Ex ia Da] IIIC




RIA45, ORIA45

Table of contents


About this document	4
Associated documentation	4
Supplementary documentation	4
Manufacturer´s certificates	5
Manufacturer address	5
Safety instructions:	6
Safety instructions: Installation	7
Temperature tables	7
Electrical connection data	7

About this document

 This document has been translated into several languages. Legally determined is solely the English source text.

The document translated into EU languages is available:

- In the download area of the Endress+Hauser website:
www.endress.com -> Downloads -> Manuals and Datasheets -> Type: Ex Safety Instruction (XA) -> Text Search: ...
- In the Device Viewer: www.endress.com -> Product tools -> Access device specific information -> Check device features

 If not yet available, the document can be ordered.

Associated documentation

This document is an integral part of the following Operating Instructions:

- Operating instructions: BA00272R
- Brief operating instructions: KA00271R
- Technical information: TI00141R

Supplementary documentation

Explosion-protection brochure: CP00021Z/11

The Explosion-protection brochure is available:

- In the download area of the Endress+Hauser website:
www.endress.com -> Downloads -> Brochures and Catalogs -> Text Search: CP00021Z
- On the CD for devices with CD-based documentation

**Manufacturer's
certificates****ATEX certificate**

Certificate number: PTB 08 ATEX 2036

Affixing the certificate number certifies conformity with the following standards (depending on the device version)

- EN IEC 60079-0 : 2018
- EN 60079-11 : 2012

EU Declaration of Conformity

Declaration number: EC_00178

UKCA certificate

Certificate number: CML 21UKEX2995

UKCA Declaration of Conformity

Declaration number: UK_00400

**Manufacturer
address**




Endress+Hauser Wetzler GmbH + Co. KG
Obere Wank 1
87484 Nesselwang, Germany

Safety instructions:

Explosive hazardous area
EPL Ga, Gb, Gc
Zone 0, 1, 2
Zone 20, 21, 22
EPL Da, Db, Dc

Non-hazardous area

e.g. certified 2-wire device

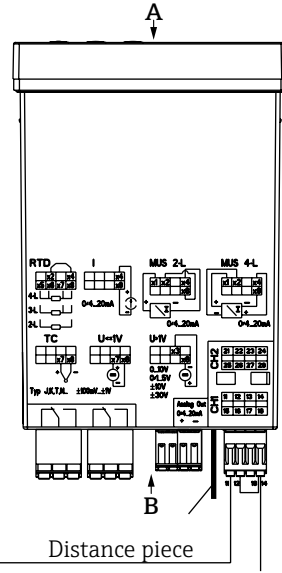

Note wiring scheme on device!

A0046755

Safety instructions: Installation

- Install the device according to the manufacturer's instructions and any other valid standards and regulations.
- The unit is an associated electrical apparatus and can only be installed outside the hazardous area.
- The unit must be installed in such a way that a minimum ingress protection of IP 20 is achieved.
- When installing the unit care must be taken that there must be a spacing of at least 50 mm (zone radius) to the intrinsically safe terminals.
- In applications for Zone 20/EPL Da or 21/EPL Db only sensors that fulfill the requirements for category 1D or 2D can be connected to the intrinsically safe input circuit.

Temperature tables

RIA45, ORIA45	II (1)G [Ex ia Ga] IIC II (1)D [Ex ia Da] IIIC
Temperature range	Ta = -20 to 60 °C

Electrical connection data

RIA45, ORIA45	II (1)G [Ex ia Ga] IIC II (1)D [Ex ia Da] IIIC
Supply circuit Terminals L/+, N/-, PE	U _m = 20 to 253 V AC/DC 50/60 Hz
Pulse and current output Terminals O15, O16 Terminals O25, O26 (optional)	0/4 to 20 mA U _m = 250 V
Open Collector Terminals D11, D12	U _m = 30 V I _{max} = 200 mA
Relay output Terminals R11, R12, R13 Terminals R21, R22, R23	U _{max} ≤ 250 V _{AC} I _{max} ≤ 3 A U _{max} ≤ 30 V _{DC} I _{max} ≤ 3 A
Interfaces CDI	U = 5 V U _m = 250 V
2-wire loop-power-supply (intrinsically safe) Terminals 11, 14, 12, 18 Terminals (optional) 21, 24, 22, 28	U ₀ ≤ 27.3 V I ₀ ≤ 96.5 mA P ₀ ≤ 659 mW
Inner capacities Inner inductances	C _i = 8 nF L _i = 75 μH
Max. connection values	Ex ia IIC Co ≤ 88 nF Lo ≤ 4 mH Ex ia IIB Co ≤ 683 nF Lo ≤ 17 mH Ex ia IIA Co ≤ 2280 nF Lo ≤ 34 mH

RIA45, ORIA45		II (1)G [Ex ia Ga] IIC II (1)D [Ex ia Da] IIIC	
4-wire loop-power-supply (intrinsically safe) Terminals 11, 12 Terminals (optional) 21, 22 Inner capacities Inner inductances Max. connection values		Ex ia IIC Ex ia IIB Ex ia IIA	$U_o \leq 27.3 \text{ V}$ $I_o \leq 91.1 \text{ mA}$ $P_o \leq 622 \text{ mW}$ $C_i = 8 \text{ nF}$ $L_i = 75 \text{ } \mu\text{H}$ $C_o \leq 70 \text{ nF}$ $L_o \leq 500 \text{ } \mu\text{H}$ $C_o \leq 310 \text{ nF}$ $L_o \leq 2 \text{ mH}$ $C_o \leq 460 \text{ nF}$ $L_o \leq 20 \text{ mH}$
4-wire loop-power-supply (intrinsically safe) Terminals 14, 18 Terminals (optional) 24, 28 Inner capacities Inner inductances Max. connection values		Ex ia IIC Ex ia IIB Ex ia IIA	$U_o \leq 27.3 \text{ V}$ $I_o \leq 5 \text{ mA}$ $P_o \leq 34.2 \text{ mW}$ $U_i \leq 28 \text{ V}$ $I_i \leq 100 \text{ mA}$ $P_i \leq 650 \text{ mW}$ $C_i = 8 \text{ nF}$ $L_i = 75 \text{ } \mu\text{H}$ $C_o \leq 88 \text{ nF}$ $L_o \leq 500 \text{ } \mu\text{H}$ $C_o \leq 380 \text{ nF}$ $L_o \leq 2 \text{ mH}$ $C_o \leq 540 \text{ nF}$ $L_o \leq 100 \text{ mH}$
RTD temperature input (intrinsically safe) Terminals 15, 16, 17, 18 and 12, 14 Terminals (optional) 25, 26, 27, 28 and 22, 24 Inner capacities Inner inductances Max. connection values		Ex ia IIC Ex ia IIB Ex ia IIA	$U_o \leq 27.3 \text{ V}$ $I_o \leq 22.1 \text{ mA}$ $P_o \leq 151 \text{ mW}$ $C_i = 8 \text{ nF}$ $L_i = 75 \text{ } \mu\text{H}$ $C_o \leq 85 \text{ nF}$ $L_o \leq 500 \text{ } \mu\text{H}$ $C_o \leq 360 \text{ nF}$ $L_o \leq 2 \text{ mH}$ $C_o \leq 530 \text{ nF}$ $L_o \leq 5 \text{ mH}$
Thermocouple temperature input (intrinsically safe) Terminals 17, 18 Terminals (optional) 27, 28 Inner capacities Inner inductances Max. connection values		Ex ia IIC Ex ia IIB Ex ia IIA	$U_o \leq 27.3 \text{ V}$ $I_o \leq 15.5 \text{ mA}$ $P_o \leq 105.8 \text{ mW}$ $U_i \leq 28 \text{ V}$ $I_i \leq 100 \text{ mA}$ $P_i \leq 650 \text{ mW}$ $C_i = 8 \text{ nF}$ $L_i = 75 \text{ } \mu\text{H}$ $C_o \leq 74 \text{ nF}$ $L_o \leq 1 \text{ mH}$ $C_o \leq 370 \text{ nF}$ $L_o \leq 2 \text{ mH}$ $C_o \leq 530 \text{ nF}$ $L_o \leq 100 \text{ mH}$
Current input (intrinsically safe) Terminals 14, 18 Terminals (optional) 24, 28			$U_o \leq 27.3 \text{ V}$ $I_o \leq 5 \text{ mA}$ $P_o \leq 34.2 \text{ mW}$

RIA45, ORIA45		II (1)G [Ex ia Ga] IIC II (1)D [Ex ia Da] IIIC	
Inner capacities		$U_i \leq 28 \text{ V}$	
Inner inductances		$I_i \leq 100 \text{ mA}$	
		$P_i \leq 650 \text{ mW}$	
		$C_i = 8 \text{ nF}$	
		$L_i = 75 \text{ } \mu\text{H}$	
Max. connection values	Ex ia IIC	$C_o \leq 88 \text{ nF}$	$L_o \leq 500 \text{ } \mu\text{H}$
	Ex ia IIB	$C_o \leq 380 \text{ nF}$	$L_o \leq 2 \text{ mH}$
	Ex ia IIA	$C_o \leq 540 \text{ nF}$	$L_o \leq 100 \text{ mH}$
Voltage input (intrinsically safe)		$U_o \leq 27.3 \text{ V}$	
Terminals 13, 18		$I_o \leq 5 \text{ mA}$	
Terminals (optional) 23, 28		$P_o \leq 34.2 \text{ mW}$	
		$U_i \leq 28 \text{ V}$	
		$I_i \leq 100 \text{ mA}$	
		$P_i \leq 650 \text{ mW}$	
		$C_i = 8 \text{ nF}$	
		$L_i = 75 \text{ } \mu\text{H}$	
Max. connection values	Ex ia IIC	$C_o \leq 88 \text{ nF}$	$L_o \leq 500 \text{ } \mu\text{H}$
	Ex ia IIB	$C_o \leq 380 \text{ nF}$	$L_o \leq 2 \text{ mH}$
	Ex ia IIA	$C_o \leq 540 \text{ nF}$	$L_o \leq 100 \text{ mH}$



71575458

www.addresses.endress.com
