

Safety Instructions

Memosens oxygen sensors

NEPSI Ex ia IIC T6/ T4 Ga

Safety instructions for electrical apparatus in explosion-hazardous areas






Memosens oxygen sensors

NEPSI Ex ia IIC T6/ T4 Ga

Table of contents

Associated documentation	4
Supplementary documentation	4
Certificates	4
Identification	4
Ex-approval	4
Safety instructions	4
Type code	5
Temperature tables	5
Connection	6
Installation conditions	6

Associated documentation	<p>This document is an integral part of the Memosens COS22E Operating Instructions BA02145C.</p> <p>This document is an integral part of the Memosens COS51E Operating Instructions BA02146C.</p>
Supplementary documentation	<p> Competence Brochure CP00021Z</p> <ul style="list-style-type: none"> ▪ Explosion Protection: Guidelines and General Principles ▪ www.endress.com
Certificates	<p>The certificates and declarations of conformity are available in the Downloads area of the Endress +Hauser website:</p> <p>www.endress.com/download</p> <p>The number of the NEPSI certificate that applies to the product can be found on the nameplate.</p>
Identification	<p>The nameplate provides you with the following information on your device:</p> <ul style="list-style-type: none"> ▪ Manufacturer identification ▪ Order code ▪ Extended order code ▪ Serial number ▪ Safety information and warnings ▪ Ex marking on hazardous area versions <p>► Compare the information on the nameplate with the order.</p>
Ex-approval	<p>NEPSI</p> <p>Ex ia IIC T6... T4 Ga</p>
Safety instructions	<ul style="list-style-type: none"> ▪ A maximum ambient temperature of 90 °C (194 °F) must not be exceeded at the sensor head. ▪ Oxygen sensors for use in hazardous areas have a special conductive O-ring. The electrical connection of the metallic sensor shaft to the conductive mounting location (such as a metallic assembly) is via the O-ring. ▪ Appropriate measures must be taken to connect the assembly or the mounting location to ground in accordance with the Ex guidelines. ▪ The plastic housing may only be cleaned with a damp cloth. ▪ Hazardous area versions of digital sensors with Memosens technology are marked by an orange/red ring on the plug-in head. ▪ The maximum permitted cable length between the sensor and transmitter is 100 m (330 ft). ▪ When using devices and sensors, observe the regulations for electrical systems in hazardous areas (EN/IEC 60079-14). ▪ The procedures for electrical connection described in the Operating Instructions must be followed. ▪ The end user must adhere to the Operating Instructions and the following standards for the installation, operation and maintenance of the product: <ul style="list-style-type: none"> ▪ GB 50257-2014 "Code for construction and acceptance of electric device for explosion atmospheres and fire hazard electrical equipment installation engineering". ▪ GB 3836.13-2013 "Explosive atmospheres - Part 13: Equipment repair, overhaul and reclamation" ▪ GB/T 3836.15-2017 "Explosive atmospheres - Part 15: Electrical installations design, selection and erection" ▪ GB/T 3836.16-2017 "Explosive atmospheres - Part 16: Electrical installations inspection and maintenance" ▪ GB/T 3836.18-2017 "Explosive atmospheres - Part 18: Intrinsically safe electrical systems" ▪ To ensure that the explosion protection of the device is maintained, the operator must not change the configuration. Any modification may affect safety. ▪ Observe the instructions of the NEPSI certificate, available via the website of the product: www.endress.com

Only Memosens COS22E:

- Oxygen sensors for use in hazardous areas have a special conductive O-ring. The electrical connection of the metallic sensor shaft to the conductive mounting location (such as a metallic assembly) is via the O-ring.
- Sensors containing parts made of titanium or other light metals must be protected against impact.
- The sensors must not be operated under electrostatically critical process conditions. Avoid strong steam or dust currents that act directly on the connection system.

Only Memosens COS51E:

- The sensors may not be operated under electrostatically critical process conditions in which electrostatic charging of the sensor and the connection system is likely to occur.
- Use of the sensor for its intended purpose in liquids with a conductivity of at least 10 nS/cm can be classified as electrostatically safe.


Type code

Memosens	COS22E-aabbccdde+g	
	aa	Approval NA: Ex ia IIC T6/T4 Ga
	bb	Measuring range (no ex-relevance)
	cc	Cap characteristics AA = Stainless steel BA = Titanium CA = Alloy C22 YY = Special version
	dd	Sensor length (no ex-relevance) max. 600 mm (23,6 in)
	e	Material of O-ring (in the cap) (no ex-relevance)
	g	Optional = one or more characters determining optional features (no ex-relevance), e.g. test or other certificates/declarations

Memosens	COS51E-aabcc+g	
	aa	Approval NA: Ex ia IIC T6 Ga
	bb	Measuring range (no ex-relevance)
	cc	Cap characteristics TF = Response time T90, 0.5 minutes TN = Response time T90, 3 minutes YY = Special version
	g	Optional = one or more characters determining optional features (no ex-relevance), e.g. test or other certificates/declarations

Temperature tables

Sensor	Process temperature T_p	Ambient temperature T_a
COS22E	$-5\text{ °C (23 °F)} \leq T_p \leq 70\text{ °C (158 °F)}$ (T6) $-5\text{ °C (23 °F)} \leq T_p \leq 100\text{ °C (212 °F)}$ (T4)	$-25\text{ °C (-13 °F)} \leq T_a \leq 70\text{ °C (158 °F)}$ (T6) $-25\text{ °C (-13 °F)} \leq T_a \leq 70\text{ °C (158 °F)}$ (T4)
COS51E	$-5\text{ °C (23 °F)} \leq T_p \leq 60\text{ °C (140 °F)}$ (T6)	$-5\text{ °C (23 °F)} \leq T_a \leq 60\text{ °C (140 °F)}$ (T6)

The above temperature table applies only under the following installation conditions, which are described in the following graphic →  6. If the installation conditions cannot be met, the maximum process temperature T_p must not exceed the maximum ambient temperature T_a .

Connection

Ex specification


- The conductivity sensors are approved according to NEPSI certificate and are suitable for use in explosion-hazardous environments.
- The approved Memosens COS22E and Memosens COS51E digital oxygen sensors have an intrinsically safe input with the following parameter set:

Parameter	Value
P_i	180 mW

The approved Memosens COS22E and Memosens COS51E digital oxygen sensors must be connected to a Memosens cable or cable transmitter with intrinsically safe output with the following parameter:

Parameter	Value
P_o	max. 180 mW

Installation conditions

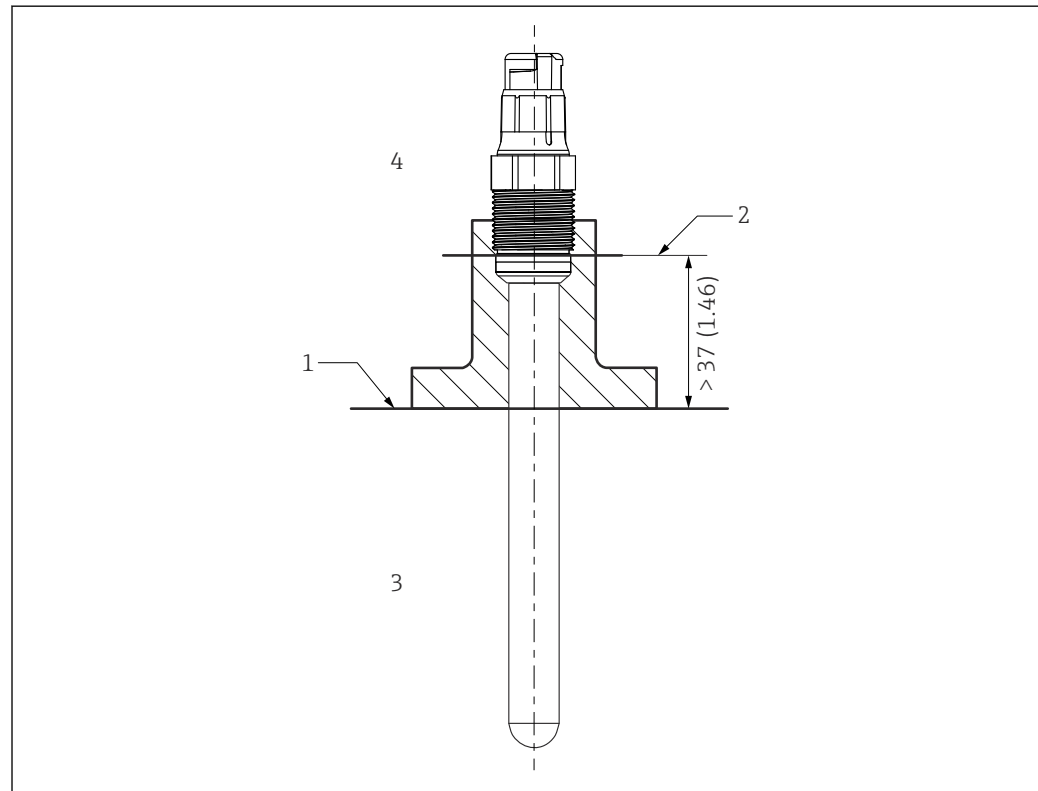

A0041281

1 Installation conditions

- 1 Limit
- 2 Distance between plug-in head (lower edge) and process medium, without ring and thrust collar
- 3 Process temperature range T_p
- 4 Ambient temperature range T_a



71604841

www.addresses.endress.com
