

Safety Instructions

RN22, RN42

[Ex ia Ga] IIC
[Ex ia Da] IIIC
Ex ec IIC Gc



RN22, RN42

Table of contents

About this document	4
Associated documentation	4
Supplementary documentation	4
Certificates and declarations	4
Manufacturer address	4
Safety instructions: Intrinsic safety	5
Safety instructions: Installation in Zone 2 (EPL Gc)	5
Safety instructions: Specific conditions of use	6
Temperature tables	6
Electrical connection data	6

About this document

The document number of these Safety Instructions (XA) must match the information on the nameplate.

Associated documentation

To commission the device, please observe the Operating Instructions pertaining to the device:

www.endress.com/<product code>, e.g. RN22

Supplementary documentation

Explosion protection brochure: CP00021Z

The explosion protection brochure is available on the Internet:

www.endress.com/Downloads

Certificates and declarations**Korean certificate**

Certificate number:

RN22: 23-KA4BO-0203X, 23-KA4BO-0551X, 23-KA4BO-0556U

RN42: 23-KA4BO-0550X, 23-KA4BO-0552X, 23-KA4BO-0557U

Affixing the certificate number certifies conformity with the following standards (depending on the device version)

Protect Device Safety Certification Notice No. 2021-22



Please refer to Korean certificates for conditions of safe use.

Manufacturer address


Endress+Hauser Wetzler GmbH + Co. KG

Obere Wank 1

87484 Nesselwang, Germany

Safety instructions:

Intrinsic safety

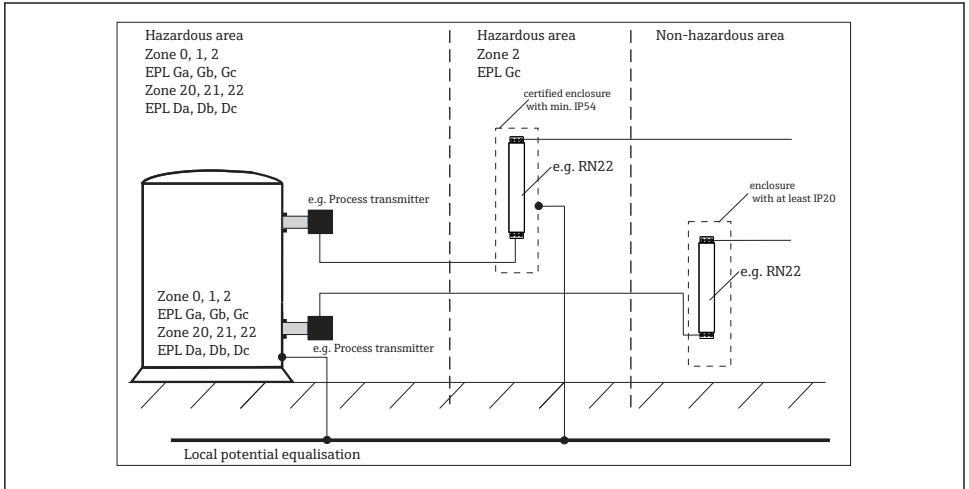

A0046146

- Comply with the installation and safety instructions in the Operating Instructions.
- Install the device according to the manufacturer's instructions and any other valid standards and regulations (e.g. EN/IEC 60079-14).
- The unit is an associated electrical apparatus and can only be installed outside the hazardous area.
- The unit must be installed in such way that a minimum ingress protection of IP 20 is achieved.
- When installing the unit care must be taken that there must be a spacing of at least 50 mm (zone radius) to the intrinsically safe terminals
- Screw tight the unused terminals for keeping the required distances between intrinsically safe circuits/terminals.

Safety instructions:

Installation in Zone 2 (EPL Gc)

These instructions concern the required enclosure, accessories and supply cables in final application.

- Comply with the installation and safety instructions in the Operating Instructions.
- Install the device according to the manufacturer's instructions and any other valid standards and regulations (e.g. EN/IEC 60079-14).
- Seal the cable entries tight with certified cable glands which have at least type of protection Ex ec suitable for Group IIC (degree of protection IP54).

**Safety instructions:
Specific conditions of use**

- If several devices are installed side by side, it is important to ensure that the maximum side wall temperature of the individual device of 80 °C (176 °F) is not exceeded. If this cannot be guaranteed, mount the devices at a distance from one another or ensure sufficient cooling.
- When install the unit in EPL Gc a certified enclosure shall be used providing a degree of protection of at least IP54 and compliance with the enclosure requirements to IEC/EN 60079-0.
- In an explosive atmosphere, do not open the certified enclosure when voltage is supplied (ensure that at least IP 54 is maintained during operation).
- For full certification as an electrical equipment for use in EPL Gc the tests according to IEC 60079-0:2017 section 5.2 and 5.3 have to be carried out. Based on the test results a temperature class shall be assigned.

Temperature tables

Type	Ambient temperature range
RN22, RN42	-40 to +60 °C

Electrical connection data

Type	Electrical data	
RN22, RN42	Supply RN22: terminals 1.1 (+), 1.2 (-)	U = 24V DC (-20%/+25%) Um = 250 V
	Supply RN42: terminals 1.1 (L/+), 1.2 (N/-)	U = 24 to 230 V AC/DC (-20 %/+10 %) 50/60Hz Um = 250 V
	Output circuit: terminal 3.1 (+), 3.2 (-) terminal 2.1 (+), 2.2 (-)	U = 30V DC I = 0/4 - 20 mA Um = 30 V

Type	Electrical data		
	Input circuit: Connection 2-wire (active) RN22: terminal 4.1 (+), 4.2 (-) terminal 6.1 (+), 6.2 (-) RN42: terminal 4.1 (+), 4.2 (-)		$U_o \leq 27.3V$ DC $I_o \leq 87.6$ mA $P_o = 597$ mW $C_i =$ negligibly small $L_i =$ negligibly small
	Maximum connection values Single values:	Ex ia IIC Ex ia IIB Ex ia IIA	$L_o = 5.2$ mH $L_o = 20.8$ mH $L_o = 44.8$ mH $C_o = 88$ nF $C_o = 683$ nF $C_o = 2280$ nF
	Combined values L_o/C_o :	Ex ia IIC	1.3 mH/ 0.047 μ F; 1 mH/ 0.052 μ F; 0.5 mH/ 0.065 μ F
Ex ia IIB		26 mH/ 0.39 μ F; 2 mH/ 0.44 μ F; 1 mH/ 0.53 μ F; 0.5 mH/ 0.64 μ F; 0.2 mH/ 0.683 μ F	
Ex ia IIA		49 mH/ 1.3 μ F; 20 mH/ 1.6 μ F; 1 mH/ 1.8 μ F; 0.5 mH/ 2.2 μ F; 0.2 mH/ 2.28 μ F	
	Connection 4-wire (passive) RN22: terminal 4.2 (+), 5.1 (-) terminal 6.2 (+), 5.2 (-) RN42: terminal 4.2 (+), 4.3 (-)		$U_o \leq 27.3V$ DC $I_o \leq 10$ mA $P_o = 68$ mW $C_i =$ negligibly small $L_i =$ negligibly small
	Maximum connection values Combined values L_o/C_o :	Ex ia IIC	100 mH/ 0.065 μ F; 2 mH/ 0.072 μ F; 1 mH/ 0.081 μ F; 0.5 mH/ 0.088 μ F
Ex ia IIB		100 mH/ 0.48 μ F; 2 mH/ 0.52 μ F; 1 mH/ 0.59 μ F; 0.5 mH/ 0.683 μ F	
Ex ia IIA		100 mH/ 1.7 μ F; 1 mH/ 1.9 μ F; 0.5 mH/ 2.28 μ F	
	Connection 4-wire (passive) RN22: terminal 4.2 (+), 5.1 (-) terminal 6.2 (+), 5.2 (-) RN42: terminal 4.2 (+), 4.3 (-)		$U_i \leq 30$ V DC $I_i =$ not applicable when keeping U_i $P_i =$ not applicable when keeping U_i $C_i =$ negligibly small $L_i =$ negligibly small

Type of protection

Ex ia Ga IIC

Ex ia Da IIIC

Ex ec IIC Gc



71631760

www.addresses.endress.com
