

Safety Instructions

Nivotester FailSafe FTL825

Installation Drawing AIS + ANI



Document: XA00647F-A
Safety instructions for electrical apparatus for explosion-
hazardous areas →  3

Nivotester FailSafe FTL825

Table of contents

Associated documentation	4
Manufacturer address	4
Extended order code	4
Safety instructions: Special conditions	6
Safety instructions: Installation	7
Class I, Div. 1 or 2; Class II, Div. 1 and Class III	8
Temperature tables	9
Connection data	9

Associated documentation

This document is an integral part of the following Operating Instructions:
BA01038F/00

Manufacturer address

Endress+Hauser SE+Co. KG
Hauptstraße 1
79689 Maulburg, Germany
Address of the manufacturing plant: See nameplate.

Extended order code

The extended order code is indicated on the nameplate, which is affixed to the device in such a way that it is clearly visible. Additional information about the nameplate is provided in the associated Operating Instructions.

Structure of the extended order code

FTL825	-	*****	+	A*B*C*D*E*F*G*..
<i>(Device type)</i>		<i>(Basic specifications)</i>		<i>(Optional specifications)</i>

* = Placeholder

At this position, an option (number or letter) selected from the specification is displayed instead of the placeholders.

Basic specifications

The features that are absolutely essential for the device (mandatory features) are specified in the basic specifications. The number of positions depends on the number of features available. The selected option of a feature can consist of several positions.

Optional specifications

The optional specifications describe additional features for the device (optional features). The number of positions depends on the number of features available. The features have a 2-digit structure to aid identification (e.g. JA). The first digit (ID) stands for the feature group and consists of a number or a letter (e.g. J = Test, Certificate). The second digit constitutes the value that stands for the feature within the group (e.g. A = 3.1 material (wetted parts), inspection certificate).

More detailed information about the device is provided in the following tables. These tables describe the individual positions and IDs in the extended order code which are relevant to hazardous locations.

Extended order code: Nivotester FailSafe



The following specifications reproduce an extract from the product structure and are used to assign:

- This documentation to the device (using the extended order code on the nameplate).
- The device options cited in the document.

Device type

FTL825

Basic specifications

Position 1, 2 (Approval)		
Selected option		Description
FTL825	CB	CSA AIS, ANI AIS Cl. I, II, III, Div. 1, Gr. A-G, [AEx/Ex ia] IIC ANI Cl. I, Div. 2, Gr. A-D, [AEx/Ex ic/nL] IIC
	8C	FM/CSA AIS, ANI AIS Cl. I, II, III, Div. 1, Gr. A-G, [AEx/Ex ia] IIC ANI Cl. I, Div. 2, Gr. A-D [AEx/Ex ic/nL] IIC

Position 3 (Housing)		
Selected option		Description
FTL825	3	Rail mounting; 45 mm, 1-channel

Position 4 (Power Supply)		
Selected option		Description
FTL825	A	85-253 VAC/DC
	E	20-30 VAC/20-60 VDC

Position 5 (Switch Output)		
Selected option		Description
FTL825	4	2x SPST safety contact level + 1x SPST signal contact + 1x SPDT alarm

Optional specifications

ID Lx (Additional Approval)		
Selected option		Description
FTL825	LC	WHG overfill prevention, Leckage
	LE	GL marine certificate
	LF	ABS marine approval
	LV	VdTÜV100 liquified gas approval


ID Px, Rx (Accessory Enclosed)		
Selected option		Description
FTL825	PA	Field housing, R4 182x180x165, 5xM20, PC, IP66

Safety instructions:
Special conditions

Permitted ambient temperature range at the electronics housing:
 $-20\text{ °C} \leq T_a \leq +60\text{ °C}$

In case of series installation: Restriction to $-20\text{ °C} \leq T_a \leq +50\text{ °C}$

Safety instructions:
Installation

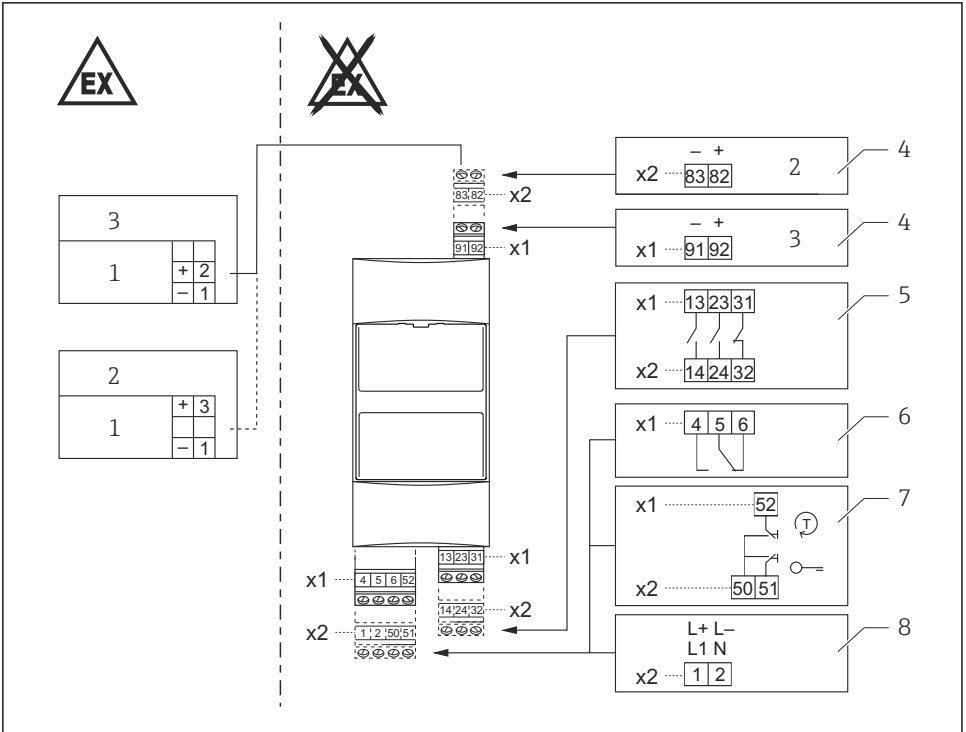


A0025641



- 1 *Liquiphant FailSafe FTL8x with electronics FEL85*
- 2 *Min. level safety*
- 3 *Max. level safety*
- 4 *Sensor*
- 5 *Level relay*
- 6 *Fault signal relay*
- 7 *Remote operation: test and unlocking*
- 8 *Power supply*

Installation on the top hat rail

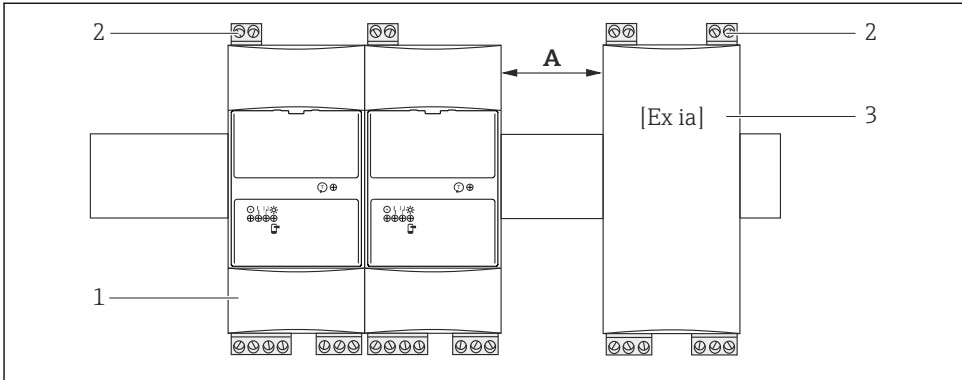

A0025642



- 2 Min. 6 mm
 1 Nivotester FTL825
 2 Intrinsically safe contacts
 3 Other type, other product

Class I, Div. 1 or 2;
 Class II, Div. 1 and
 Class III

Associated Equipment, providing intrinsically safe circuits for

- Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III; [Exia]
- Class I, Zone 0 [Ex/AEx ia Ga] IIC
- Class I, Zone 2 [Ex/AEx ic Gc] IIC

Associated Equipment, providing non-incendive (NI) field wiring circuits for

Class I, Div. 2, Groups A, B, C, D

Hazardous locations installations

- Install per Canadian Electrical Code (CEC) Part I or National Electrical Code (NEC) (ANSI/NFPA70) and ISA RP 12.06.01, as applicable for the country in use.
- Maximum safe area voltage: $250 V_{rms}$
- The device must be installed in a suitable enclosure with protection from dust and moisture in a nonhazardous location and provides intrinsically safe circuits for connection to apparatus installed in Class I, Div. 1, Groups A, B, C, D, Class II, Div. 1, Groups E, F, G, Class III or Class I, Zone 0/1/2, Group IIC hazardous locations; or non-incendive (NI) field wiring circuits for connection to apparatus installed in Class I, Div. 2, Groups A, B, C, D or Class I, Zone 2, Group IIC hazardous locations.

- Apparatus installed in the hazardous area must be approved for the location and must be installed in accordance with manufacturer instructions.
- Use additional precautions such as wiring tie downs or special wiring methods to provide adequate separation between intrinsically safe and non-intrinsically safe wiring, especially when terminals of different devices are arranged one above the other.
- Where multiple devices are installed in the same enclosure, terminals of intrinsically safe circuits must be separated from terminals of non-intrinsically safe circuits by creepage and clearance distance of at least 50 mm.
- **WARNINGS:** Substitution of components may impair suitability of outputs for hazardous locations.

Temperature tables

Ambient temperature range

Individual installation
-20 to +60 °C

Series installation
-20 to +50 °C

Connection data

Power supply circuit

Basic specification, Position 4 (Power Supply) = A

Terminal 1, 2
Power supply $U = 85 \text{ to } 250 \text{ V}_{AC}, 50/60 \text{ Hz}$ $P \leq 3.8 \text{ VA}$ $U = 85 \text{ to } 250 \text{ V}_{DC}$ $P \leq 2 \text{ W}$

Basic specification, Position 4 (Power Supply) = E

Terminal 1, 2
Power supply $U = 20 \text{ to } 30 \text{ V}_{AC}, 50/60 \text{ Hz}$ $P \leq 3.6 \text{ VA}$ $U = 20 \text{ to } 60 \text{ V}_{DC}$ $P = 2.5 \text{ W}$

Contact circuit

Fault signal relay	Terminal 4, 5, 6
Level relay	Terminal 13, 14 Terminal 23, 24 Terminal 31, 32
Power supply	
$U \leq 250 \text{ V}_{\text{AC}}$	
$I \leq 2 \text{ A}$	
$P \leq 500 \text{ VA}$ at $\cos \varphi > 0.7$	
$U \leq 40 \text{ V}_{\text{DC}}$	
$I \leq 2 \text{ A}$	
$P \leq 80 \text{ W}$	

Intrinsically safe installation, [Ex/AEx ia/ic] IIC
Non-incendive field wiring installation, [Ex nL] IIC
Signal circuit: Entity parameter



Only one device may be connected to the FTL825, either for MIN or MAX level detection (terminals 82/83 or 91/92, respectively).

Min. level safety	Terminal 82 (+) Terminal 83 (-)			
Max. level safety	Terminal 91 (-) Terminal 92 (+)			
Connection data:	V_{oc} (or U_o) = 22 V I_{sc} (or I_o) = 166 mA P_o = 970 mW		$R_i \geq 132 \Omega$ (Characteristic curve: linear) $C_i \leq 1 \text{ nF}$, $L_i = 0$ C_a (or C_o) $\leq 0.165 \mu\text{F}$ L_a (or L_o) $\leq 2.8 \text{ mH}$	
	Class I, Gr. A, B Class I, Gr. IIC		Class I, Gr. C-G Class I, Gr. IIB/IIA	
	L_a (or L_o)	C_a (or C_o)	L_a (or L_o)	C_a (or C_o)
Max. external capacitance at max. external inductance	0.15 mH	100 nF	0.15 mH	700 nF
	0.50 mH	40 nF	0.50 mH	500 nF
	1.00 mH	20 nF	1.00 mH	500 nF
	-	-	2.00 mH	500 nF

	Class I, Gr. A, B Class I, Gr. IIC		Class I, Gr. C-G Class I, Gr. IIB		Class I, Gr. D Class I, Gr. IIA	
	L_a (or L_o)	C_a (or C_o)	L_a (or L_o)	C_a (or C_o)	L_a (or L_o)	C_a (or C_o)
Max. external capacitance or max. external inductance	2.8 mH	165 nF	12.0 mH	1.14 μF	30 mH	4.2 μF



71473076

www.addresses.endress.com
