

Technical Information

Liquiline CM14

Based on digital Memosens technology



Four-wire transmitter for pH/ORP, conductivity and oxygen

Application

The Liquiline CM14 is a four-wire transmitter in compact design for installation in panels or cabinets.

Application

- Wastewater treatment
- Water treatment and drinking water monitoring
- Ion exchanger
- Surface water monitoring

Your benefits

- Compact device in 48 x 96 mm panel-mounted housing
- Easy to use
- Memosens technology
 - Use of precalibrated sensors
 - Safety thanks to active indication of cable break
- Two contacts for limit contactor
- Second current output for temperature

Table of contents


Function and system design	3	Weight	10
Measuring system	3	Materials	10
		Terminals	10
Dependability	4	Operability	11
Reliability	4	Operating elements	11
Input	5	Certificates and approvals	11
Measured variables	5	Ordering information	11
Measuring ranges	5	Product page	11
Input types	5	Product Configurator	11
Cable specification	5	Scope of delivery	12
Output	5	Accessories	12
Output signal	5	Device-specific accessories	12
Load	5		
Linearization/transmission behavior	5		
Alarm output	5		
Current outputs, active	5		
Span	5		
Signal characterization	5		
Electrical specification	5		
Cable specification	6		
Relay outputs	7		
Relay types	7		
Switching capacity	7		
Cable specification	7		
Power supply	7		
Electrical connection	7		
Supply voltage	8		
Power consumption	8		
Performance characteristics	9		
Response time	9		
Reference temperature	9		
Measurement error for sensor inputs	9		
Current output resolution	9		
Repeatability	9		
Installation	9		
Mounting location	9		
Orientation	9		
Environment	9		
Ambient temperature	9		
Storage temperature	9		
Relative humidity	9		
Operating height	9		
Degree of protection	9		
Electromagnetic compatibility	10		
Mechanical construction	10		
Dimensions	10		

Function and system design

Measuring system

A complete measuring system comprises:

- a Liquiline CM14 transmitter
- an assembly with sensor
- a measuring cable

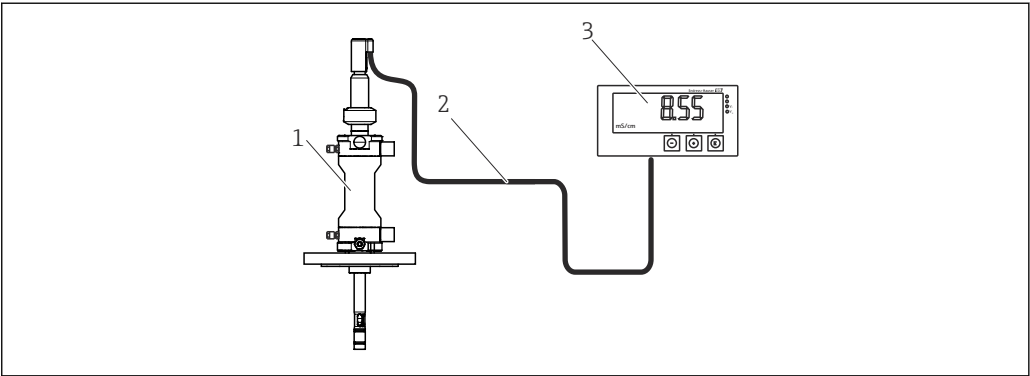

A0047385

1 Measuring system with Liquiline CM14




1 Assembly with sensor

2 Measuring cable

3 Liquiline CM14 transmitter

The overview shows examples of measuring systems. Other sensors and assemblies can be ordered for conditions specific to your application (www.endress.com/products).

pH value or ORP	
A photograph of a pH/ORP transmitter unit with a digital display showing '8.15'. Three different sensor assemblies are shown below it, connected by dashed lines to the transmitter. The sensors are labeled CPS11D, CPS91D, and CPF81D. The transmitter has buttons and a display. The sensors are of different shapes and colors (blue, white, and blue).	A technical drawing of a sensor assembly, showing a cylindrical body with a cable attached to the top and a probe at the bottom.
A0047392	
2 pH/ORP measurement with Liquiline CM14	
Conductivity	

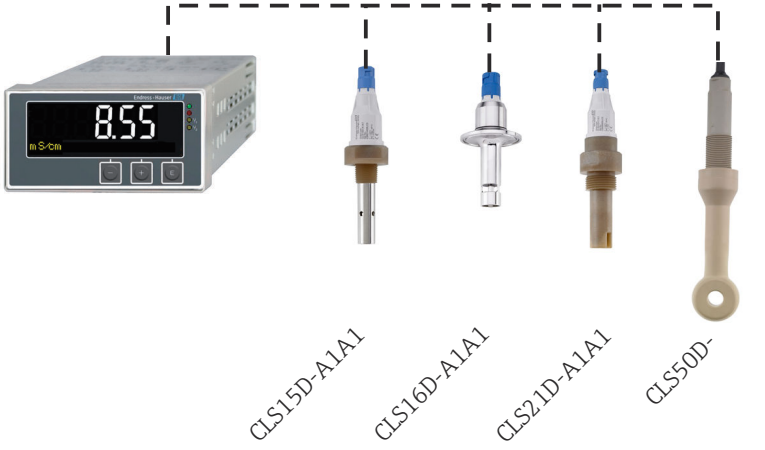 CLS15D-A1A1 CLS16D-A1A1 CLS21D-A1A1 CLS50D- 3 Conductivity measurement with Liquiline CM14 A0047389	
Oxygen	
 COS51D 4 Oxygen measurement with Liquiline CM14 A0047393	

Dependability

Reliability

Process Check System (PCS)

This function is used to check the measuring signal for deviations (live check). If the measuring signal does not change over a certain period (several measured values), an alarm is triggered. The cause of such behavior may be contamination, clogging or similar.

Temperature compensation

The temperature compensation options are: linear, NaCl curve according to IEC 746, ultrapure water NaCl (neutral compensation) or ultrapure water HCl (acid compensation, also for ammonia).

Ultrapure water monitoring according to USP (United States Pharmacopoeia) and EP (European Pharmacopoeia)

Ultrapure water monitoring according to USP <645> or EP means that the uncompensated conductivity and the temperature are measured and the results are compared against a table.

The transmitter contains the following functions:

- Monitoring of "Water for Injection" (WFI) according to USP and EP
- Monitoring of "Purified Water" (PW) according to EP

Memosens

Memosens makes your measuring point safer and more reliable:

- Non-contact, digital signal transmission enables optimum galvanic isolation
- No contact corrosion
- Completely watertight
 - Can even be connected under water
 - No contact corrosion

- Sensor can be calibrated in a lab, thus increasing the availability of the measuring point in the process
- Intrinsically safe electronics mean operation in hazardous areas is not a problem.
- Predictive maintenance thanks to recording of sensor data, e.g.:
 - Total hours of operation
 - Hours of operation with very high or very low measured values
 - Hours of operation at high temperatures
 - Number of steam sterilizations
 - Sensor condition

Input

Measured variables	→ Documentation of the connected sensor
Measuring ranges	→ Documentation of the connected sensor
Input types	Digital sensor inputs for sensors with Memosens protocol
Cable specification	Cable type Memosens data cable CYK10 or fixed sensor cable, each with cable end sleeves or M12 round-pin connector (optional) Cable length Max. 100 m (330 ft)

Output

Output signal	2 x 0/4 to 20 mA, active, galvanically isolated from one another and from the sensor circuits				
Load	Max. 500 Ω				
Linearization/transmission behavior	Linear				
Alarm output	The alarm output is implemented as an "open collector". During normal operation, the alarm output is closed. In the event of a fault (diagnostic message with status "F", device is disconnected from power supply), the "Open Collector" opens. <table><tr><td>Max. current</td><td>200 mA</td></tr><tr><td>Max. voltage</td><td>28 V DC</td></tr></table>	Max. current	200 mA	Max. voltage	28 V DC
Max. current	200 mA				
Max. voltage	28 V DC				

Current outputs, active

Span	0 to 23 mA
Signal characterization	Linear
Electrical specification	Output voltage Max. 24 V Test voltage 500 V

Cable specification

Cable type

Recommended: shielded cable

Cable specification


Max. 1.5 mm² (16 AWG)

Relay outputs

Relay types	2 changeover contacts
Switching capacity	max. 3 A @ 24 V DC max. 3 A @ 253 V AC min. 100 mW (5 V / 10 mA)
Cable specification	Max. 2.5 mm² (14 AWG)

Power supply

Electrical connection

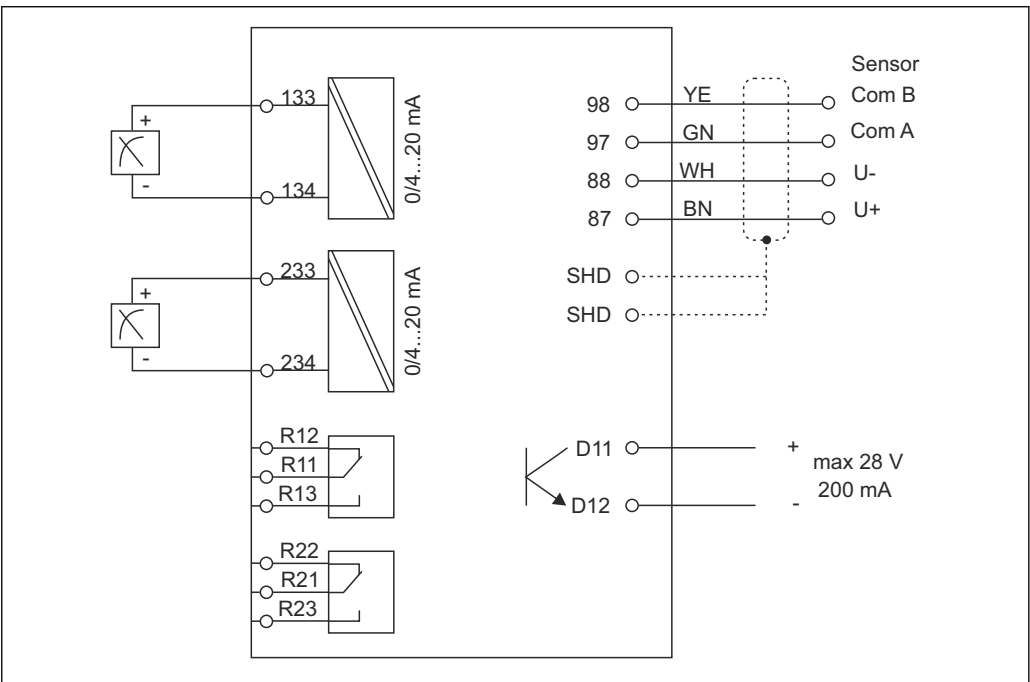

5 Electrical connection of the transmitter

Connection	Description
87	Terminal for Memosens cable, brown, sensor power supply U+
88	Terminal for Memosens cable, white, sensor power supply U-
97	Terminal for Memosens cable, green, Com A
98	Terminal for Memosens cable, yellow, Com B
SHD	Terminal for Memosens cable, shield
D11	Terminal for alarm output, +
D12	Terminal for alarm output, -
L/+	Terminal for transmitter supply voltage
N/-	
⊕PE	
133	Terminal for analog output 1, +
134	Terminal for analog output 1, -
233	Terminal for analog output 2, +

Connection	Description
234	Terminal for analog output 2, -
R11, R12, R13	Terminal for relay 1
R21, R22, R23	Terminal for relay 2

Supply voltage

Universal power supply unit 24 to 230 V AC/DC (-20 % / +10 %) 50/60Hz



The device does not have a power switch

- The customer must provide a protected circuit breaker in the vicinity of the device.
- The circuit breaker must be a switch or power switch, and must be labeled as the circuit breaker for the device.

Power consumption


Max. 13.8 VA / 6.6 W

Performance characteristics

Response time	Current outputs t_{90} = max. 500 ms for an increase from 0 to 20 mA
Reference temperature	25 °C (77 °F)
Measurement error for sensor inputs	→ Documentation of the connected sensor
Current output resolution	> 13 bit
Repeatability	→ Documentation of the connected sensor

Installation

Mounting location	Panel, cutout 92 x 45 mm (3.62 x 1.77 in) Max. panel thickness 26 mm (1 in)
Orientation	The orientation is determined by the legibility of the display. Max. viewing angle range of +/- 45° from the central display axis in every direction.

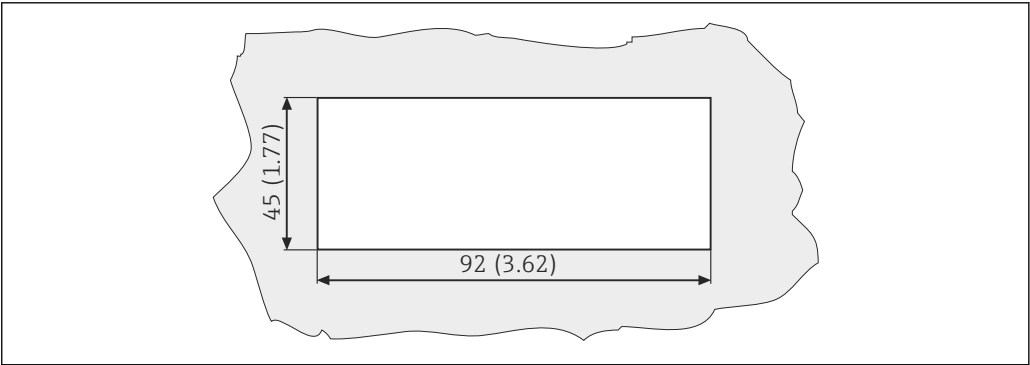

A0010351

 6 Panel cutout. Engineering unit mm (in)

Environment

Ambient temperature	-10 to +60 °C (14 to 140 °F)
Storage temperature	-40 to +85 °C (-40 to 185 °F)
Relative humidity	5 to 85 %, non-condensing
Operating height	< 2 000 m (6 561 ft) above MSL
Degree of protection	Front Front IP65 / NEMA 4X Casing IP20 shock protection

Electromagnetic compatibility	Interference emission and interference immunity as per EN 61326-1, class A for industrial areas
-------------------------------	---


Mechanical construction

Dimensions	16.7 (0.66) 43.9 (1.73) 118.6 (4.67) 151.8 (5.98) 41.9 (1.65) 48 (1.89) 96 (3.78) 90.9 (3.56) 88.9 (3.50) A0047373
------------	--

Weight	0.3 kg (0.66 lbs)
Materials	Housing, casing: Polycarbonate Front foil: Polyester, UV-resistant
Terminals	Max. 2.5 mm ² (22-14 AWG; torque 0.4 Nm (3.5 lb in)) mains, relay

Operability

Operating elements

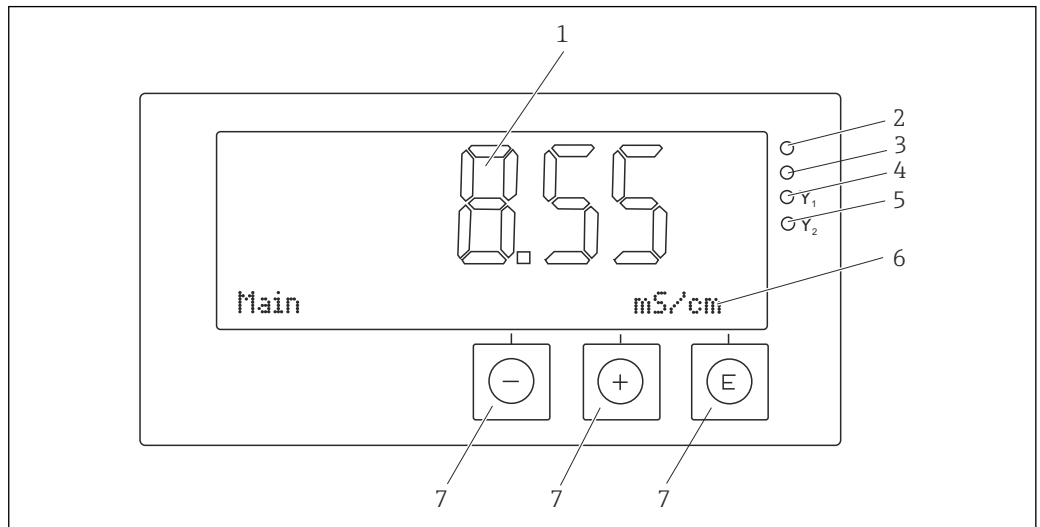

7 Display and operating elements

- 1 LC display for displaying the measured values and configuration data
- 2 Status LED, power supply connected
- 3 Status LED, alarm function
- 4 Status LED for limit switch relay 1
- 5 Status LED for limit switch relay 2
- 6 Dot matrix display for displaying the dimensions and menu items
- 7 Operating keys

Certificates and approvals

Current certificates and approvals for the product are available at www.endress.com on the relevant product page:

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Downloads**.

Ordering information

Product page www.endress.com/cm14

Product Configurator

1. **Configure:** Click this button on the product page.
 2. Select **Extended selection**.
 - ↳ The Configurator opens in a separate window.
 3. Configure the device according to your requirements by selecting the desired option for each feature.
 - ↳ In this way, you receive a valid and complete order code for the device.
 4. **Accept:** Add the configured product to the shopping cart.
- i** For many products, you also have the option of downloading CAD or 2D drawings of the selected product version.
5. **CAD:** Open this tab.
 - ↳ The drawing window is displayed. You have a choice between different views. You can download these in selectable formats.

Scope of delivery

The scope of delivery comprises:

- 1 Transmitter in the version ordered
- 1 Mounting kit
- 1 Operating Instructions

Accessories

The following are the most important accessories available at the time this documentation was issued.

Listed accessories are technically compatible with the product in the instructions.

1. Application-specific restrictions of the product combination are possible.
Ensure conformity of the measuring point to the application. This is the responsibility of the operator of the measuring point.
2. Pay attention to the information in the instructions for all products, particularly the technical data.
3. For accessories not listed here, please contact your Service or Sales Center.

Device-specific accessories**Measuring cable****Memosens data cable CYK10**

- For digital sensors with Memosens technology
- Product Configurator on the product page: www.endress.com/cyk10



Technical Information TI00118C

Sensors*Glass electrodes***Orbisint CPS11D**

- pH sensor for process technology
- With dirt-repellent PTFE diaphragm
- Product Configurator on the product page: www.endress.com/cps11d



Technical Information TI00028C

Orbipore CPS91D

- pH electrode with open aperture for media with high dirt load
- Product Configurator on the product page: www.endress.com/cps91d



Technical Information TI00375C

Orbipac CPF81D

- Compact pH sensor for installation or immersion operation
- In industrial water and wastewater
- Product Configurator on the product page: www.endress.com/cpf81d



Technical Information TI00191C

*ORP sensors***Orbisint CPS12D**

- ORP sensor for process technology
- Product Configurator on the product page: www.endress.com/cps12d



Technical Information TI00367C

Orbipore CPS92D

- ORP electrode with open aperture for media with high dirt load
- Product Configurator on the product page: www.endress.com/cps92d



Technical Information TI00435C

Orbipac CPF82D

- Compact ORP sensor for installation or immersion operation in process water and wastewater
- Product Configurator on the product page: www.endress.com/cpf82d

 Technical Information TI00191C

Conductivity sensors with conductive measurement of conductivity

Condumax CLS15D

- Conductive conductivity sensor
- For pure water, ultrapure water and hazardous area applications
- Product Configurator on the product page: www.endress.com/CLS15d

 Technical Information TI00109C

Condumax CLS16D

- Hygienic, conductive conductivity sensor
- For pure water, ultrapure water and Ex applications
- With EHEDG and 3A approval
- Product Configurator on the product page: www.endress.com/CLS16d

 Technical Information TI00227C

Condumax CLS21D

- Two-electrode sensor in plug-in head version version
- Product Configurator on the product page: www.endress.com/CLS21d

 Technical Information TI00085C

Conductivity sensors with inductive measurement of conductivity

Indumax CLS50D

- High-durability inductive conductivity sensor
- For standard and hazardous area applications
- With Memosens technology
- Product Configurator on the product page: www.endress.com/cls50d

 Technical Information TI00182C

Oxygen sensors

Oxymax COS51D

- Amperometric sensor for dissolved oxygen
- With Memosens technology
- Product Configurator on the product page: www.endress.com/cos51d

 Technical Information TI00413C

Oxymax COS22D

- Sterilizable sensor for dissolved oxygen
- With Memosens technology
- Product Configurator on the product page: www.endress.com/cos22d

 Technical Information TI00446C



71789038

www.addresses.endress.com
