

# Safety Instructions

## Memosens COS81E

EAC Ex 0Ex ia IIC T6... T3 Ga

EAC Ex ia op is IIIC T90 °C...T200 °C Da

Safety instructions for electrical apparatus in  
explosion-hazardous areas





# Memosens COS81E

EAC Ex 0Ex ia IIC T6... T3 Ga  
 EAC Ex ia op is IIIC T90 °C...T200 °C Da

## Table of contents

Associated documentation .....	4
Supplementary documentation .....	4
Identification .....	4
Safety instructions .....	4
Type code .....	5
Temperature table .....	5
Connection .....	6
Installation conditions .....	7

## Associated documentation

This document is an integral part of Operating Instructions BA02066C.

## Supplementary documentation



Competence Brochure CP00021Z

- Explosion Protection: Guidelines and General Principles
- [www.endress.com](http://www.endress.com)

## Identification

The nameplate provides you with the following information on your device:

- Manufacturer identification
  - Order code
  - Extended order code
  - Serial number
  - Safety information and warnings
  - Ex marking on hazardous area versions
- Compare the information on the nameplate with the order.

## Ex-approval

*EAC Ex*

Ex ia op is IIC T6... T3 Ga X  
Ex ia op is IIIC T90°C... T200°C Da X

## Notified body

**ООО "НАННО ЦСВЭ"**

Russian Federation

## Safety instructions

The Memosens COS81E oxygen sensor is suitable for use in hazardous areas in accordance with:

EAC Ex certificate **EAЭC RU C-DE.AA87.B.00833/21**

- The product has been certified in accordance with Directive TR CU 012/2011 valid within the Eurasian Economic Area (EAEU). The EAC conformity mark has been affixed to the product.
- A maximum ambient temperature of 90 °C (194 °F) must not be exceeded at the sensor head.
- Oxygen sensors for use in hazardous areas have a special conductive O-ring. The electrical connection of the metallic sensor shaft to the conductive mounting location (such as a metallic assembly) is via the O-ring.
- Appropriate measures must be taken to connect the assembly or the mounting location to ground in accordance with the Ex guidelines.


- The sensors must not be operated under electrostatically critical process conditions. Avoid strong steam or dust currents that act directly on the connection system.
- The plastic housing may only be cleaned with a damp cloth.
- Hazardous area versions of digital sensors with Memosens technology are marked by an orange/red ring on the plug-in head.
- The maximum permitted cable length between the sensor and transmitter is 100 m (330 ft).
- Sensors containing parts made of titanium or other light metals must be protected against impact.
- When using devices and sensors, observe the regulations for electrical systems in hazardous areas (EN/ IEC 60079-14).

**Type code**

Memosens	COS81E-aabbccdde+g	
	aa	Approval (no ex-relevance)  <b>GG</b> 0Ex ia op is IIC T6 ... T3 Ga X  <b>G5</b> 0Ex ia op is IIC T6 ... T3 Ga X + Ex ia op is IIIC T90°C... T200°C Da X
	bb	Measuring range (no ex-relevance)
	cc	Cap characteristics AC = Stainless steel C-shape AU = Stainless steel U-shape BC = Titanium C-shape BU = Titanium U-shape CC = Alloy C22 C-shape CU = Alloy C22 U-shape YY = Special version
	dd	Sensor length (no ex-relevance) max. 600 mm
	e	Material of O-ring (in the cap) (no ex-relevance)
	g	Optional = one or more characters determining optional features (no ex-relevance), e.g. test or other certificates/ declarations

**Temperature table**

Sensor	Process temperature $T_p$	Ambient temperature $T_a$
COS81E	-15 ≤ $T_p$ ≤ 130 °C (T3 rep. T200 °C) -15 ≤ $T_p$ ≤ 120 °C (T4 rep. T135 °C) -15 ≤ $T_p$ ≤ 70 °C (T6 rep. T90°C)	-25 ≤ $T_a$ ≤ 70 °C (T3 rep. T200 °C) -25 ≤ $T_a$ ≤ 90 °C (T4 rep. T135 °C) -25 ≤ $T_a$ ≤ 70 °C (T6 rep. T90°C)

The above temperature table applies only under the following installation conditions, which are described in the following graphic →  7. If the installation conditions cannot be met, the maximum

process temperature  $T_p$  must not exceed the maximum ambient temperature  $T_a$ .

## Connection

### Ex specification

- The Memosens COS81E oxygen sensor is approved EAC Ex certificate EA9C RU C-DE.AA87.B.00833/2.1 and suitable for use in hazardous environments.
- The approved Memosens COS81E digital oxygen sensor has an intrinsically safe input with the following parameter set:

Parameter	Value
$P_i$	180 mW


The approved Memosens COS81E digital oxygen sensor uses inherently safe optical radiation:

Parameter	Value
$P_{opt}$ (sensor signal)	$\leq 15$ mW

The approved Memosens COS81E digital oxygen sensor must be connected to a Memosens cable or cable transmitter with intrinsically safe output with the following parameter:

Parameter	Value
$P_o$	max. 180 mW

**Installation conditions**

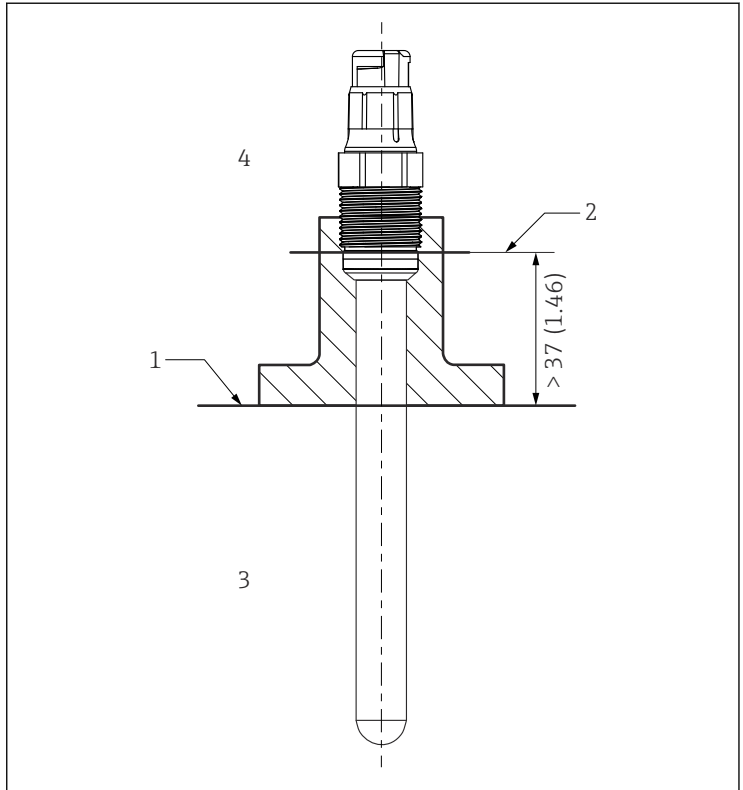

A0041281

1 Installation conditions

- 1 Limit
- 2 Distance between plug-in head (lower edge) and process medium, without ring and thrust collar
- 3 Process temperature range  $T_p$
- 4 Ambient temperature range  $T_a$



71559850

[www.addresses.endress.com](http://www.addresses.endress.com)

---