


Hazardous location

Non hazardous location

Class I, Div. 1,2, Groups A, B, C, D
Class I, Zone 0, IIC
AEx ia IIC T6
Class II, Div. 1, 2, Groups E, F, G
Class III

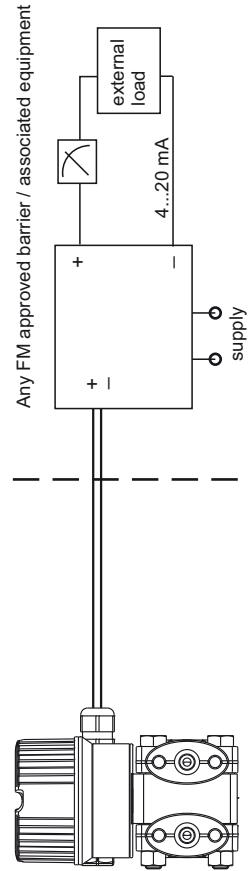

Entity parameters:
 $V_{max} = 30 \text{ VDC}$
 $I_{max} = 300 \text{ mA}$
 $P_{max} = 1 \text{ W}$
 $C_i \leq 10 \text{ nF}$
 $L_i = 0$

Areas of application:
The compact instruments are suitable for use in areas subject to explosion caused by gases, vapours or mists.

Table: Permissible ambient temperature and temperature code:

Temperature code	Permissible ambient temperature, electronic compartment
T6	-40...40°C
T4	-40...70°C

option for Ta,min: -50°C

The devices are FM Certified as Dual Seal per ANSI/ISA 12.27.01 as tabulated below; therefore installation of external secondary seals is not required.

Annunciation in case of primary seal failure				
Dual Seal	Model	Media	Annunciation method	Pressure range for effective annunciation min
PMD55		gas	audible	3.5 bar (50.7 psi)
		liquid	audible/visible	3.2 bar (46.4 psi)

* Limitations of the Maximum Working Pressure (MWP) are marked on the nameplate and must be considered!

Intrinsically safe installation

Intrinsically safe (entity) Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G

Hazardous Location Installation

1. Control room equipment may not use or generate over 250 V.
2. Use Factory Mutual Entity-approved intrinsic safety barrier with V_{oc} or $V_t \leq V_{max}$, I_{sc} or $I_t \leq I_{max}$, $C_a \geq C_i + C_{cable}, L_a \geq L_i + L_{cable}$.
Barrier must be incapable of delivering more than 1 Watt to a matched load.
Transmitter entity parameters are as follows: $V_{max} = 30 \text{ VDC}$
 $I_{max} = 300 \text{ mA}$
 $C_i \leq 10 \text{ nF}$
 $L_i = 0$
3. Installation should be in accordance with ANSI/ISA RP 12.06.01 "Installation of intrinsically safe systems for hazardous (classified) locations" and the National Electrical Code (ANSI/NFPA 70).
4. Warning: Substitution of Components may impair intrinsic safety.
5. Intrinsic safety barrier manufacturer's installation drawing must be followed, when installing this equipment. The configuration of the intrinsic safety barrier(s) must be FMRC approved.
6. Use supply wires suitable for 5°C above surrounding ambient.
7. Avoid electrostatic charging of plastic surfaces, plastic process connections or coatings.

Division 2 and Zone 2 installation

Nonincentive Class I, Div. 2, Groups A, B, C, D
Hazardous Location Installation

8. Installation shall be in accordance with NEC using threaded conduits or other wiring methods in accordance with articles 500 to 510.
Intrinsic safety barrier not required.
Max. supply voltage 45 VDC.
9. Warning: Explosion Hazard - Do not disconnect equipment unless power has been switched off or the area is known to be non hazardous.
Warning: Substitution of Components may impair suitability for Class I, Div. 2.
10. Nonincentive field wiring installation:
The Nonincentive Field Wiring Circuit Concept allows interconnection of nonincentive field wiring apparatus with associated nonincentive field wiring apparatus or associated apparatus not specifically examined in combination as a system using any of the wiring methods permitted for unclassified locations, when $V_{max} \geq V_{oc}$ or V_t , $C_a \geq C_i + C_{cable}$, $L_a \geq L_i + L_{cable}$.
Transmitter parameters are as follows: $V_{max} = 45 \text{ VDC}$; $C_i \leq 10 \text{ nF}$; $L_i = 0$;
 $I_{max} = \text{see note 11}$
Max. ambient temperature, 70°C.
11. For these current controlled circuit, the parameter I_{sc} and I_t of the associated nonincentive field wiring apparatus or associated apparatus.

Class II, III installation

DIP for Class II, III, Div. 1, Groups E, F, G
Hazardous Location Installation

12. Installation of transmitter wiring according to NEC using threaded conduits or other wiring methods in accordance with articles 500 to 510.
13. Use a dust tight seal at the conduit entry.

Functional ratings:
These ratings do not supersede Hazardous Location values.
 $U_{thm} \leq 45 \text{ VDC}$
 $I_{thm} = 4...20 \text{ mA}$ (max. 25 mA)

Remark: For service purposes the Endress+Hauser Commubox FXA191 or FXA195 may be connected to the display connection of the electronic insert. Follow safety advices of the Commubox.

