

Hazardous location


Non-hazardous location

Class I, Div. 1, 2, Groups A, B, C, D
Class I, Zone 0, IIC
Class II, Div. 1, 2, Groups E, F, G
Class III

Intrinsically safe (entity), Class I, II, III, Div. 1, Group A, B, C, D, E, F, G

Hazardous Location Installations

- Control room equipment may not use or generate over 250 V.
- Use Factory Mutual Entity-approved intrinsic safety barrier with $V_{oc} \leq V_{max}$, $I_{sc} \leq I_{max}$, $C_i \geq C_{cable}$, $L_a \geq L_{cable}$
- Barrier must be incapable of delivering more than 1 Watt to a matched load.
- Transmitter entity parameters are as follows:
 $V_{max} = 30$ VDC
 $I_{max} = 200$ mA
 $C_i \leq 11.8$ nF
 $L_i \leq 225$ μ H ('electronic' option code A, B, C) or $L_i = 0$ ('electronic' option code D, E, F)
For T-code = see table
- Installation should be in accordance with ANSI/ISA RP 12.06.01 „Installation of intrinsically safe systems for hazardous (classified) locations and the National Electrical Code (ANSI/NFPA 70).
- Warning: Substitution of Components may impair intrinsic safety.
- Intrinsic safety barrier manufacturer's installation drawing must be followed, when installing this equipment. The configuration of the intrinsic safety barrier(s) must be FMRC approved.
- Use supply wires suitable for 5°C above surrounding ambient.
- Avoid electrostatic charging of plastic surfaces, plastic process connections and coatings.

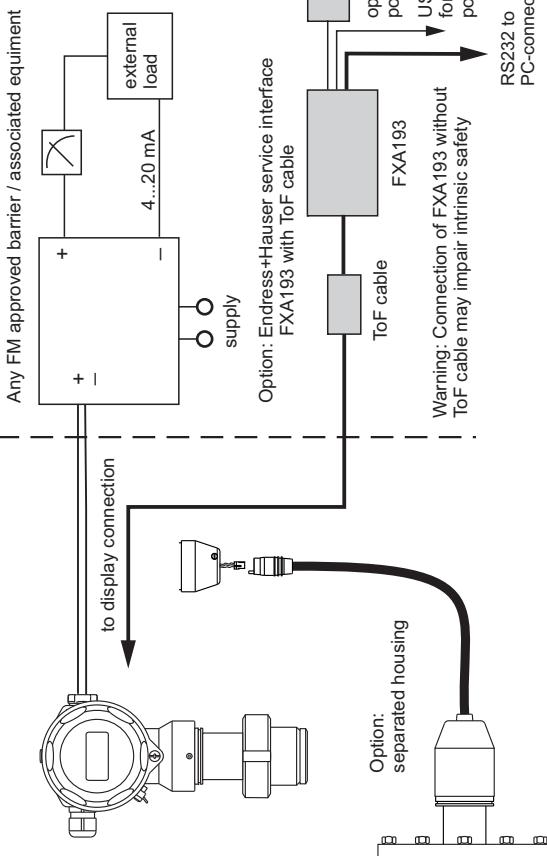

Areas of application
The compact instruments are suitable for use in areas subject to explosion caused by gases, vapours or mists.

Table: Permissible ambient temperature and temperature code:

Temperature code	Permissible ambient temperature, electronic compartment
T6	-40°C...+40°C
T4	-40°C...+70°C

option for Ta min: -50°C

The devices are FM certified as Single Seal per ANSI/ISA 12.27.01 as tabulated below; therefore installation of external secondary seals is not required.

Model	MWP*	Limited to	Process temperature **
Single seal FMB70	10 bar		-10°C...+100°C

- * Limitations of the Maximum Working Pressure (MWP) are marked on the nameplate and must be considered!
- ** Limitations of the process temperature range depending on the used version are specified in the applicable technical information of the manufacturer and must be considered!

XAO1061P-C/00/EN/01.12
CCS/FM 9.0
FM/C 01.08.12



71217885

FM Control Drawing 960007651 C

Deltapilot S FMB70
4-20 mA HART
IS

Endress+Hauser

People for Process Automation



Intrinsically safe installation

Intrinsically safe (entity), Class I, II, III, Div. 1, Group A, B, C, D, E, F, G

Hazardous Location Installations

- Control room equipment may not use or generate over 250 V.
- Use Factory Mutual Entity-approved intrinsic safety barrier with $V_{oc} \leq V_{max}$, $I_{sc} \leq I_{max}$, $C_i \geq C_{cable}$, $L_a \geq L_{cable}$
- Barrier must be incapable of delivering more than 1 Watt to a matched load.
- Transmitter entity parameters are as follows:
 $V_{max} = 30$ VDC
 $I_{max} = 200$ mA
 $C_i \leq 11.8$ nF
 $L_i \leq 225$ μ H ('electronic' option code A, B, C) or $L_i = 0$ ('electronic' option code D, E, F)
For T-code = see table
- Installation should be in accordance with ANSI/ISA RP 12.06.01 „Installation of intrinsically safe systems for hazardous (classified) locations and the National Electrical Code (ANSI/NFPA 70).
- Warning: Substitution of Components may impair intrinsic safety.
- Intrinsic safety barrier manufacturer's installation drawing must be followed, when installing this equipment. The configuration of the intrinsic safety barrier(s) must be FMRC approved.
- Use supply wires suitable for 5°C above surrounding ambient.
- Avoid electrostatic charging of plastic surfaces, plastic process connections and coatings.

Division 2 and Zone 2 installation

Nonintrinsic Class I, Div. 2, Group A, B, C, D
Hazardous Location Installation (not for separate housing)

- Installation shall be in accordance with NEC using threaded conduits or other wiring methods in accordance with articles 500 to 510.
- Intrinsic safety barrier not required
Max. supply voltage 45 VDC
For T-code see table
- Warning: Explosion hazard - Do not disconnect equipment unless power has been switched off or the area is known to be non hazardous.
- Nonintrinsic field wiring installation
The Nonintrinsic Field Wiring Circuit Concept allows interconnection of nonintrinsic field wiring apparatus with associated nonintrinsic field wiring apparatus or associated apparatus not specifically examined in combination as a system using any of the wiring methods permitted for unclassified locations, when $V_{max} \leq V_{oc}$ or $V_t, C_i \leq C_{i+1}$ $Cable$
 $L_a \leq L_{cable}$
- Transmitter parameters are as follows: $V_{max} = 45$ VDC; $C_i \leq 11.8$ nF
 $L_i \leq 225$ μ H ('electronic' option code A, B, C) or $L_i = 0$ ('electronic' option code D, E, F)
 I_{max} = see note 11
- For these current controlled circuit, the parameter I_{max} is not required and need not to be aligned with parameter I_{sc} and it of the associated nonintrinsic field wiring apparatus or associated apparatus.
- Warning: Substitution of Components may impair suitability for Class I, Div. 2.

Class II, III installation

DIP for Class II and III, Div. 1, Group E, F, G

Hazardous Location Installation (not for separate housing)

- Installation of transmitter wiring according to NEC using threaded conduits or other wiring methods in accordance with articles 500 to 510.
- Use a dust tight seal at the conduit entry.