

# Technical Information

## Liquiphant FTL31 IO-Link

Point level switch for liquids



### Application

The Liquiphant FTL31 is a point level switch for liquids and is used in tanks, vessels and pipes.

It is used for overflow protection or pump protection in cleaning and filter systems as well as in cooling and lubrication vessels, for instance.

Ideal for applications in which float switches or conductive, capacitance and optical sensors have been used up to now. The Liquiphant FTL31 also works in areas where these measuring principles are not suitable due to conductivity, buildup, turbulence, flow conditions or air bubbles.

The Liquiphant FTL31 can be used for process temperatures up to:

- 100 °C (212 °F)
- 150 °C (302 °F)

Not suitable for hazardous areas.

The use of the Liquiphant FTL33 is recommended for hygiene areas.

### Advantages

- Operational safety, reliability and universal application thanks to the tuning fork measuring principle
- Robust stainless steel housing (316L), optionally available with M12x1 plug with IP69 protection
- External function test with test magnet
- Onsite function check possible thanks to LED indication
- Compact design for easy installation even in confined conditions or hard-to-access areas

## Table of contents











<b>Important document information</b> . . . . .	<b>3</b>	Process pressure range . . . . .	14
Symbols used . . . . .	3	Density . . . . .	14
<b>Function and system design</b> . . . . .	<b>4</b>	State of aggregation . . . . .	14
Measuring principle . . . . .	4	Viscosity . . . . .	14
Measuring system . . . . .	4	Solids contents . . . . .	14
<b>Input</b> . . . . .	<b>5</b>	Lateral loading capacity . . . . .	14
Measured variable . . . . .	5	<b>Mechanical construction</b> . . . . .	<b>15</b>
Measuring range . . . . .	5	Design . . . . .	15
<b>Output</b> . . . . .	<b>5</b>	Plug . . . . .	16
Switch output . . . . .	5	Tuning fork . . . . .	16
Operating modes . . . . .	5	Sensor type . . . . .	17
<b>Power supply</b> . . . . .	<b>5</b>	Weight . . . . .	20
Supply voltage . . . . .	5	Materials . . . . .	20
Power consumption . . . . .	5	Surface roughness . . . . .	21
Current consumption . . . . .	5	<b>Operability</b> . . . . .	<b>22</b>
Electrical connection . . . . .	5	LED indicator . . . . .	22
Device plugs . . . . .	7	Function test with test magnet . . . . .	22
Length of connecting cable . . . . .	7	<b>Certificates and approvals</b> . . . . .	<b>23</b>
Overvoltage protection . . . . .	7	CE mark . . . . .	23
<b>Performance characteristics</b> . . . . .	<b>8</b>	EAC conformity . . . . .	23
Reference operating conditions . . . . .	8	RCM-Tick marking . . . . .	23
Switch point . . . . .	8	Approval . . . . .	23
Hysteresis . . . . .	8	CRN approval . . . . .	23
Non-repeatability . . . . .	8	Inspection certificates . . . . .	23
Influence of ambient temperature . . . . .	8	Manufacturer declarations . . . . .	23
Influence of medium temperature . . . . .	8	Pressure Equipment Directive . . . . .	23
Influence of medium pressure . . . . .	8	Other standards and guidelines . . . . .	23
Switching delay . . . . .	8	<b>Ordering information</b> . . . . .	<b>24</b>
Switch-on delay . . . . .	8	Ordering information . . . . .	24
Measuring frequency . . . . .	8	Services (optional) . . . . .	24
Measured error . . . . .	8	<b>Accessories</b> . . . . .	<b>24</b>
<b>Installation</b> . . . . .	<b>9</b>	Weld-in adapter . . . . .	24
Orientation . . . . .	9	Plug-in jack, cable . . . . .	24
Installation instructions . . . . .	9	Additional accessories . . . . .	25
Length of connecting cable . . . . .	11	<b>Supplementary documentation</b> . . . . .	<b>26</b>
<b>Environment</b> . . . . .	<b>12</b>	Operating Instructions Liquiphant FTL31 . . . . .	26
Ambient temperature range . . . . .	12	Operating Instructions Liquiphant FTL31 IO-Link . . . . .	26
Storage temperature . . . . .	12	Additional documentation . . . . .	26
Climate class . . . . .	12	Certificates . . . . .	26
Altitude . . . . .	12		
Degree of protection . . . . .	13		
Shock resistance . . . . .	13		
Vibration resistance . . . . .	13		
Electromagnetic compatibility . . . . .	13		
Reverse polarity protection . . . . .	13		
Short-circuit protection . . . . .	13		
<b>Process</b> . . . . .	<b>14</b>		
Process temperature range . . . . .	14		

## Important document information

---

**Symbols used**

**Symbols for certain types of information and graphics**

-  **Permitted**  
Procedures, processes or actions that are permitted
-  **Forbidden**  
Procedures, processes or actions that are forbidden
-  **Tip**  
Indicates additional information
-  **Reference to documentation**
-  **Reference to graphic**
-  **Notice or individual step to be observed**
-  **Series of steps**
-  **Result of a step**
-  **Item numbers**
-  **Views**

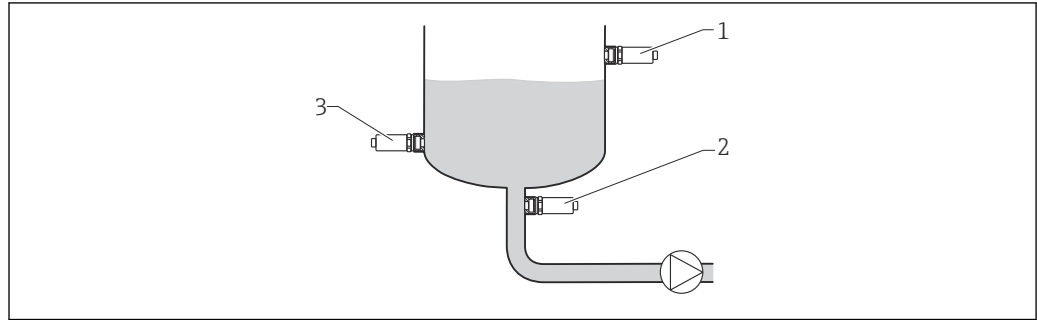
## Function and system design

### Measuring principle

A piezoelectric drive causes the tuning fork of the device to vibrate at its resonance frequency. When the tuning fork is immersed in a liquid, its intrinsic frequency changes due to the change in density of the surrounding medium. The electronics system in the point level switch monitors the resonance frequency and indicates whether the tuning fork is vibrating in air or is covered by liquid.

### Measuring system

The measuring system consists of a point level switch, e.g. for connection to programmable logic controllers (PLC).



A0036961

#### 1 Installation examples

- 1 Overfill protection or upper level detection (maximum safety)
- 2 Dry running protection for pump (minimum safety)
- 3 Lower level detection (minimum safety)

## Input

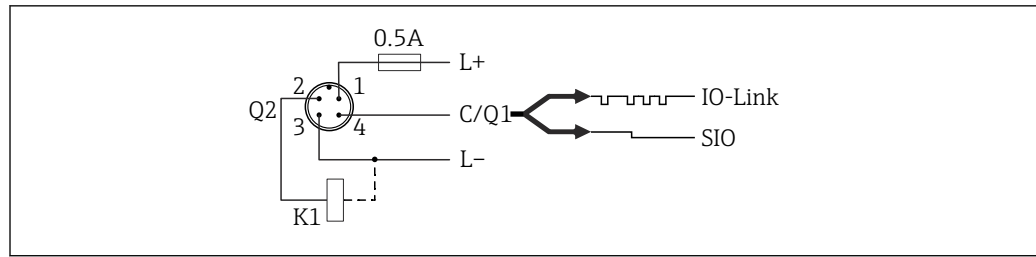
<b>Measured variable</b>	Density
<b>Measuring range</b>	<ul style="list-style-type: none"> <li>▪ <math>&gt; 0.7 \text{ g/cm}^3</math> (optionally available: <math>&gt; 0.5 \text{ g/cm}^3</math>)</li> <li>▪ Can be configured by the customer onsite via IO-Link</li> </ul>

## Output

<b>Switch output</b>	<p>Switching behavior: On/Off</p> <p><b>Function</b></p> <ul style="list-style-type: none"> <li>▪ 3-wire DC-PNP: Positive voltage signal at the switch output of the electronics (PNP) Switching capacity: 200 mA</li> <li>▪ IO-Link (4-wire): Switching capacity: <ul style="list-style-type: none"> <li>▪ 105 mA (for mode with 2x load)</li> <li>▪ 200 mA (for mode with 1x IO-Link and 1x load)</li> </ul> </li> </ul>
<b>Operating modes</b>	<p>The device has two operating modes: maximum safety (MAX) and minimum safety (MIN).</p> <p>By choosing the corresponding operating mode, the user ensures that the device also switches in a safety-oriented manner even in an alarm condition, e.g. if the power supply line is disconnected.</p> <ul style="list-style-type: none"> <li>▪ <b>Maximum safety (MAX)</b> The device keeps the electronic switch closed as long as the liquid level is below the fork. Sample application: overfill protection</li> <li>▪ <b>Minimum safety (MIN)</b> The device keeps the electronic switch closed as long as the fork is immersed in liquid. Sample application: Dry running protection for pumps</li> </ul> <p>The electronic switch opens if the limit is reached, if a fault occurs or the power fails (quiescent current principle).</p> <p><b>Window functions</b></p>

## Power supply

<b>Supply voltage</b>	<p><b>SIO mode</b> 10 to 30 VDC</p> <p><b>IO-Link mode</b> 18 to 30 VDC</p> <p>IO-Link communication is guaranteed only if the supply voltage is at least 18 V.</p>
<b>Power consumption</b>	< 1 W (at max. load: 200 mA)
<b>Current consumption</b>	< 15 mA
<b>Electrical connection</b>	<p><b>Connecting the device</b></p> <p>The following electronic version and connection are available for the device:</p> <ul style="list-style-type: none"> <li>- Electronic version 4-wire DC-PNP, IO-Link with connection via M12 plug</li> </ul> <p>A fine-wire fuse is necessary for operation: 500 mA slow-blow.</p>



A0037916

- Pin 1 Supply voltage +  
Pin 2 1st switch output  
Pin 3 Supply voltage -  
Pin 4 IO-Link communication or 2nd switch output (SIO mode)

SIO mode (without IO-Link communication)

Minimum safety		
Terminal assignment	MIN output	LED yellow (ye) 1
<b>Symbols</b> Yellow LED (ye) lit Yellow LED (ye) not lit K1 External load		

A0037918























Maximum safety		
Terminal assignment	MAX output	LED yellow (ye) 2
<b>Symbols</b> Yellow LED (ye) lit Yellow LED (ye) not lit K1 External load		

A0037919

Function monitoring with M12 plug

When both outputs are connected, the MIN and MAX outputs assume opposite states (XOR) when the device is operating fault-free. In the event of an alarm condition or a cable break, both outputs

are de-energized. This means that function monitoring is possible in addition to level monitoring. The behavior of the switch outputs can be configured via IO-Link.

Connection for function monitoring using XOR operation					
Terminal assignment	MAX output	LED yellow (ye) 2	MIN output	LED yellow (ye) 1	LED red (rd)
		A0037919		A0037918	
					
					
					
<b>Symbols</b>	<b>Description</b>				
	LED lit				
	LED not lit				
	Fault or warning				
	External load				

Post-connection check

- ☐ Are the device and cable undamaged (visual inspection)?
- ☐ Does the supply voltage match the specifications on the nameplate?
- ☐ If supply voltage is present, is the green LED lit?
- ☐ With IO-Link communication: is the green LED flashing?

Device plugs	M12 plug; IEC 60947-5-2
Length of connecting cable	<ul style="list-style-type: none"><li>Max. 25 Ω/wire, total capacitance &lt; 100 nF</li><li>IO-Link communication: &lt; 10 nF</li></ul>
Overvoltage protection	Overvoltage category II
Reverse polarity protection	
Integrated; no damage in the event of reverse polarity or short-circuit.	
Short-circuit protection	
Overload protection/short-circuit protection at I > 200 mA; the sensor is not destroyed.	
If both switch outputs are active: 105 mA per switch output.	
Intelligent monitoring:	
Testing for overload at intervals of approx. 1.5 s; normal operation resumes once the overload/short-circuit has been rectified	

## Performance characteristics

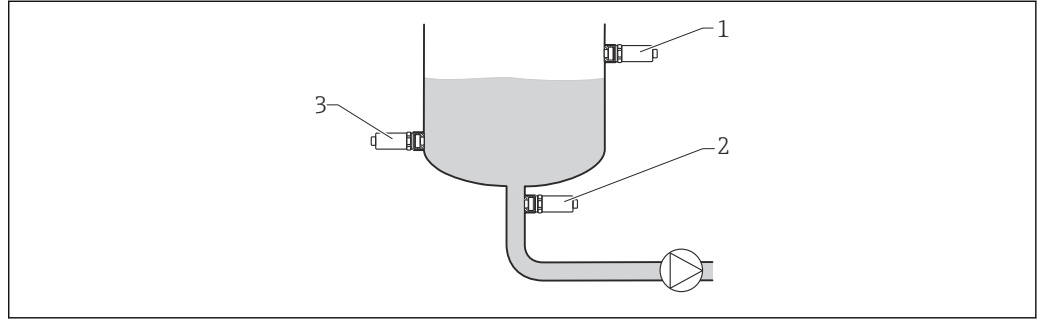
<b>Reference operating conditions</b>	Ambient temperature:	+25 °C (+77 °F)
	Process pressure:	1 bar (14.5 psi)
	Fluid:	Water (density: approx. 1 g/cm <sup>3</sup> , viscosity 1 mm <sup>2</sup> /s)
	Medium temperature:	25 °C (77 °F)
	Density setting:	> 0.7 g/cm <sup>3</sup>
	Switching time delay:	Standard (0.5 s, 1 s)
<b>Switch point</b>	13 mm (0.51 in)±1 mm	
<b>Hysteresis</b>	max. 3 mm (0.12 in)	
<b>Non-repeatability</b>	±1 mm (0.04 in) in accordance with DIN 61298-2	
<b>Influence of ambient temperature</b>	Negligible	
<b>Influence of medium temperature</b>	-25 µm (984 µin)/°C	
<b>Influence of medium pressure</b>	-20 µm (787 µin)/bar	
<b>Switching delay</b>	<ul style="list-style-type: none"> <li>■ 0.5 s when tuning fork is covered</li> <li>■ 1.0 s when tuning fork is uncovered</li> <li>■ Optionally available: 0.2 s; 1.5 s or 5 s (when the tuning fork is covered and uncovered)</li> <li>■ Can be configured via IO-Link from 0.3 to 60 s</li> </ul>	
<b>Switch-on delay</b>	max. 3 s	
<b>Measuring frequency</b>	Approx. 1 100 Hz in air	
<b>Measured error</b>	In event of device change: ±2 mm (0.08 in) as per DIN 61298-2	



## Installation

### Orientation

The point level switch can be installed in any position in a vessel, pipe or tank. Foam formation does not affect the function.



A0036961

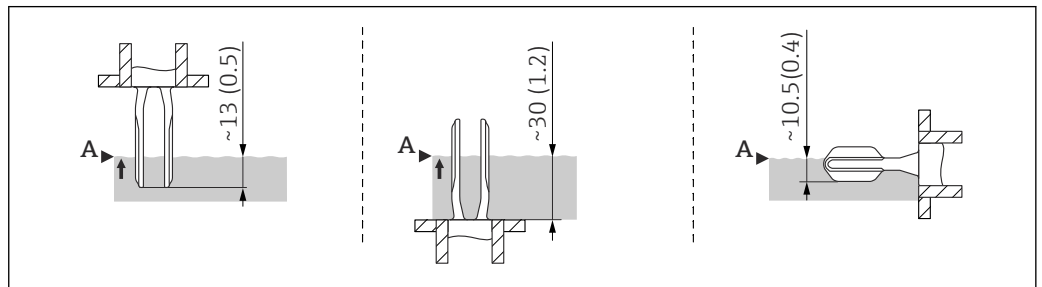
#### 2 Installation examples

- 1 Overfill protection or upper level detection (maximum safety)
- 2 Dry running protection for pump (minimum safety)
- 3 Lower level detection (minimum safety)

### Installation instructions

#### Switch point

The switch point (A) on the sensor depends on the orientation of the point level switch (water +25 °C (+77 °F), 1 bar (14.5 psi)).

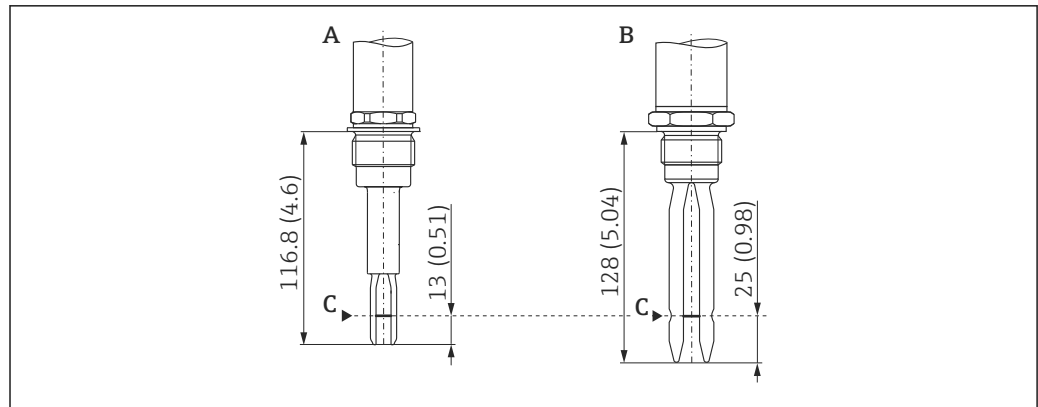


A0020734

#### 3 Orientation: vertical from above, vertical from below, horizontal; dimensions in mm (in)

#### Short tube version

The use of the short tube ensures that the switch point is at the same level as in the previous Liquiphant FTL260 model when an identical thread is selected. In this way, the device can be replaced quickly and easily. (Applies for process connections G 1" weld-in adapter for flush mount installation, MNPT 1" and R 1")

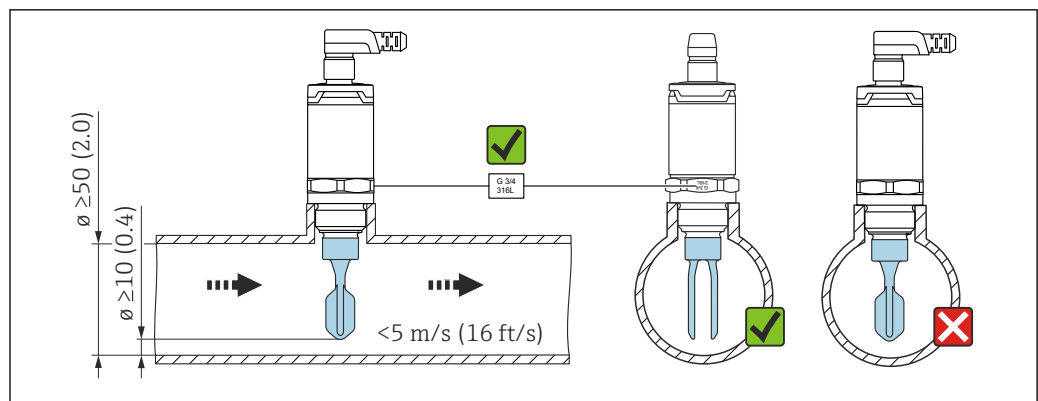


A0022122

- Dimensions mm (in)
- A Liquiphant FTL31 with short tube
- B Liquiphant FTL260
- C Switch point

### Installation in pipes

During installation, pay attention to the position of the fork in order to minimize turbulence in the pipe.



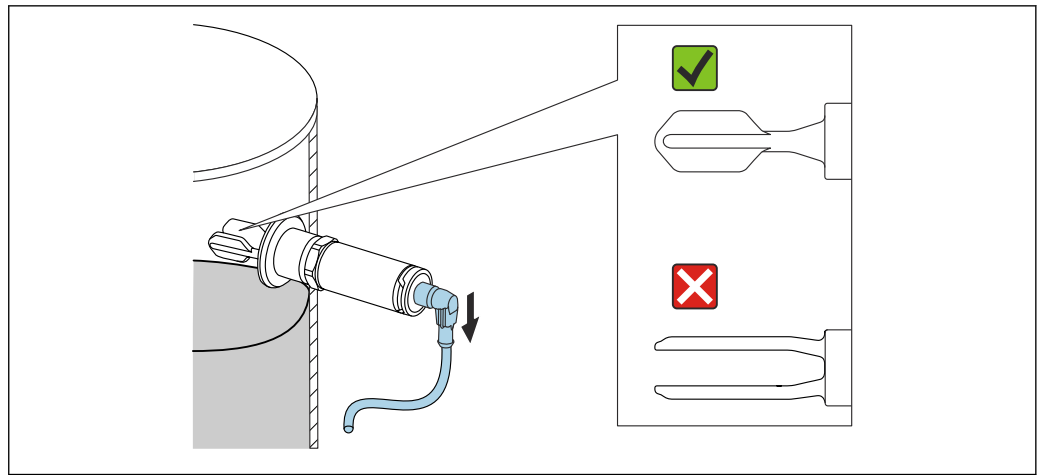
A0021357

Dimensions mm (in)

### Installation in vessels

If installed horizontally, pay attention to the position of the tuning fork to ensure that the liquid can drip off.

The electrical connection, e.g. M12 plug, should be pointing down with the cable. This can prevent moisture from penetrating.

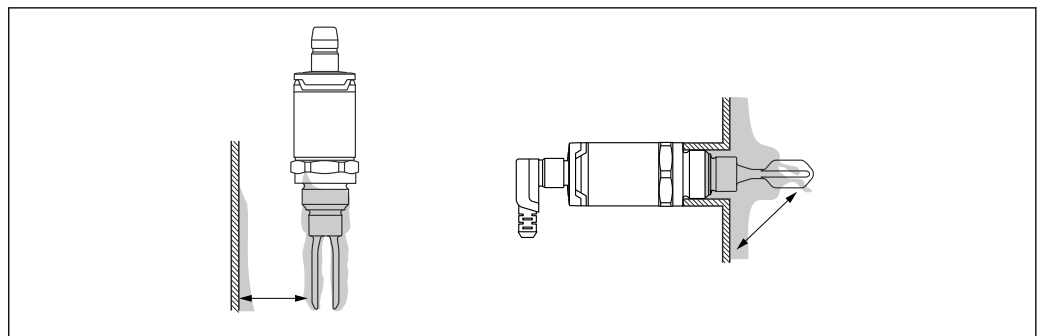


A0021034

4 Position of the fork in the case of horizontal installation in a vessel

#### Distance from wall

Ensure that there is sufficient distance between the expected buildup on the tank wall and the fork. Recommended distance from wall  $\geq 10$  mm (0.39 in).



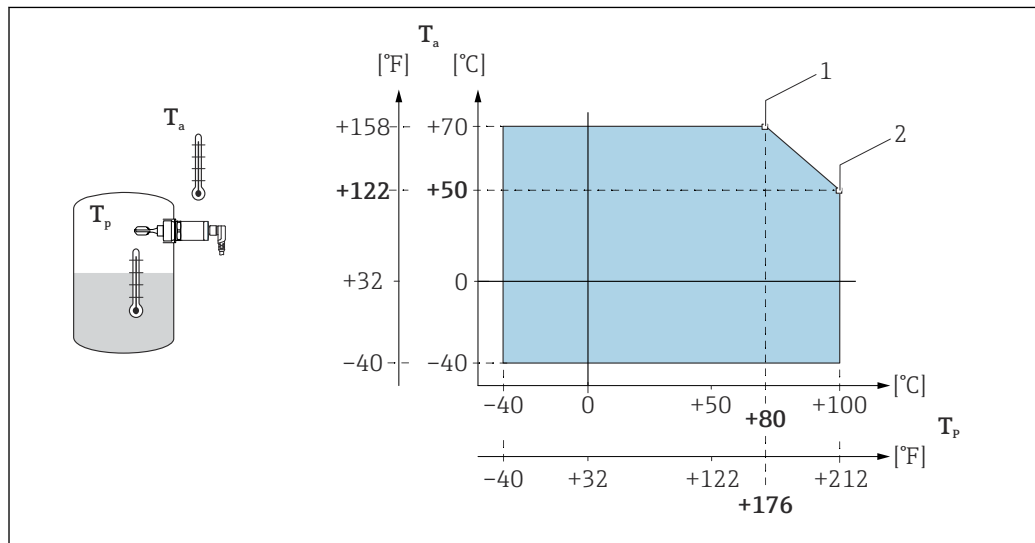
A0022272

#### Length of connecting cable

- For IO-Link up to 20 m (65.6 ft)
- Max. 25  $\Omega$ /wire, total capacitance < 100 nF

## Environment

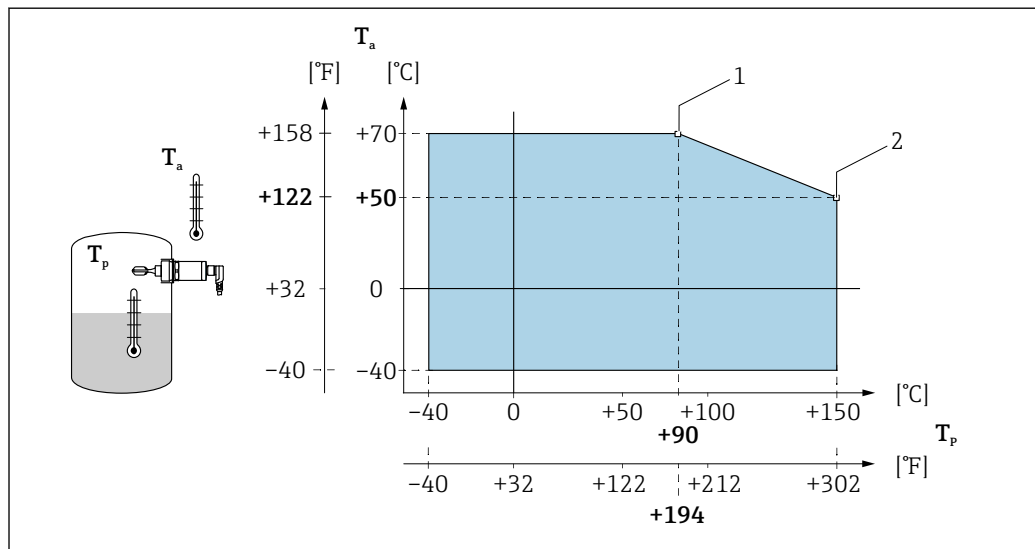
**Ambient temperature range** -40 to +70 °C (-40 to +158 °F)



A0022002

5 Derating curve: 100 °C (212 °F)

- 1  $I_{max}$ : 200 mA (DC-PNP)
- 2  $I_{max}$ : 150 mA (DC-PNP)
- Ta Ambient temperature range
- Tp Process temperature



A0020869

6 Derating curve: 150 °C (302 °F)

- 1  $I_{max}$ : 200 mA (DC-PNP)
- 2  $I_{max}$ : 150 mA (DC-PNP)
- Ta Ambient temperature range
- Tp Process temperature

**Storage temperature** -40 to +85 °C (-40 to +185 °F)

**Climate class** DIN EN 60068-2-38/IEC 68-2-38: Test Z/AD

**Altitude** Up to 2 000 m (6 600 ft) above sea level

<b>Degree of protection</b>	<ul style="list-style-type: none"> <li>■ IP65/67 NEMA Type 4X Enclosure (M12 plug)</li> <li>■ IP66/68/69 NEMA Type 4X/6P Enclosure (M12 plug for metal housing cover)</li> </ul>
<b>Shock resistance</b>	<p><math>a = 300 \text{ m/s}^2 = 30 \text{ g}</math>, 3 axes x 2 directions x 3 shocks x 18 ms, as per test Ea, prEN 60068-2-27:2007</p>
<b>Vibration resistance</b>	<p><math>a(\text{RMS}) = 50 \text{ m/s}^2</math>, <math>\text{ASD} = 1.25 \text{ (m/s}^2\text{)}^2\text{/Hz}</math>, <math>f = 5 \text{ to } 2\,000 \text{ Hz}</math>, <math>t = 3 \times 2 \text{ h}</math>, as per test Fh, EN 60068-2-64:2008</p>
<b>Electromagnetic compatibility</b>	<p>Electromagnetic compatibility in accordance with all relevant requirements of the EN 61326 series and NAMUR recommendation EMC (NE21). For details, refer to the EC Declaration of Conformity. The EC Declaration of Conformity is available in the Download Area of the Endress+Hauser website: <a href="http://www.endress.com">www.endress.com</a> → Downloads.</p>
<b>Reverse polarity protection</b>	<p><b>3-wire DC-PNP and IO-Link</b> Integrated. In the event of reverse polarity, the device is deactivated automatically.</p>
<b>Short-circuit protection</b>	<p><b>3-wire DC-PNP and IO-Link</b> Overload protection/short-circuit protection at <math>I &gt; 200 \text{ mA}</math>; the sensor is not destroyed. For IO-Link communication: 105 mA per output if both switch outputs are active. Intelligent monitoring: Testing for overload at intervals of approx. 1.5 s; normal operation resumes once the overload/short-circuit has been rectified.</p>

## Process



Note the pressure and temperature derating depending on the selected process connection.

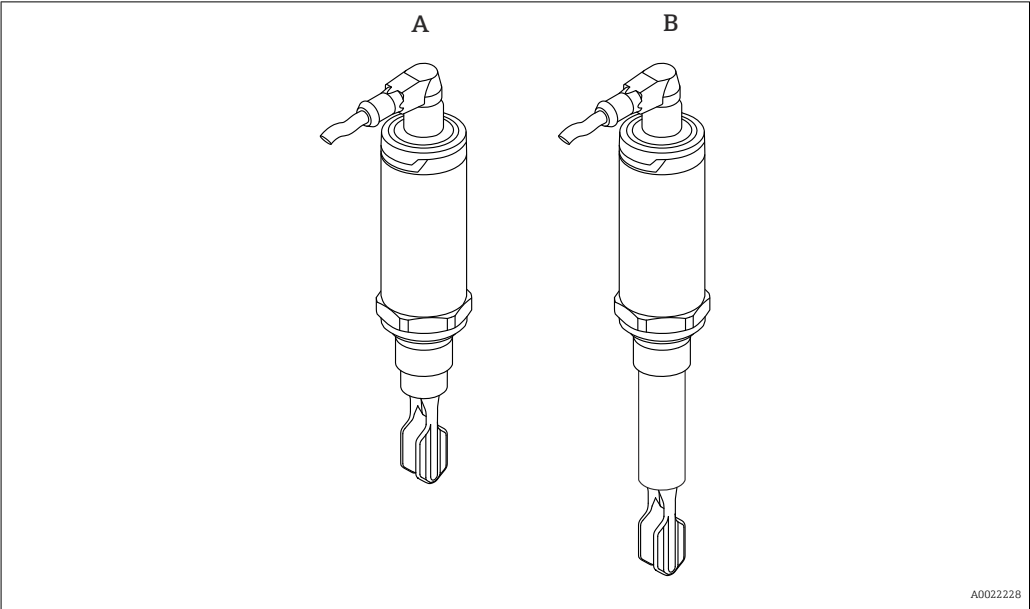
<b>Process temperature range</b>	–40 to +100 °C (–40 to +212 °F)
	–40 to +150 °C (–40 to +302 °F)
<b>Process pressure range</b>	Max. –1 to +40 bar (–14.5 to +580 psi)
<b>Density</b>	>0.7 g/cm <sup>3</sup> (optionally available: >0.5 g/cm <sup>3</sup> ), can be configured via IO-Link
<b>State of aggregation</b>	Liquid
<b>Viscosity</b>	1 to 10 000 mPa·s, dynamic viscosity
<b>Solids contents</b>	ø < 5 mm (0.2 in)
<b>Lateral loading capacity</b>	Lateral loading capacity of the tuning fork: maximum 200 N

## Mechanical construction


**Design**

The point level switch is available in different versions and can be assembled in accordance with user specifications.

The versions can be selected via the product structure in the Product Configurator, see the "Ordering information" section. For examples, see below:



Versions	Examples	
	A	B
Electrical connection	M12 plug	M12 plug
Housing (sensor design) for process temperatures up to:	150 °C (302 °F)	150 °C (302 °F)
Sensor type	Compact version	Short tube version

 For detailed information on the process connections, see the "Sensor type" section.

 For information on the short tube version, see the "Installation instructions" section.

Plug

Dimensions

Dimensions mm (in)

Electrical connection with housing cover	Designation
<p>A0020871</p>	<b>M12 plug IP69 with LED</b> <ul style="list-style-type: none"><li>■ <b>Material of housing cover, metal:</b> 316L (1.4404/1.4435)</li><li>■ <b>Degree of protection:</b> IP66/68/69 NEMA Type 4X/6P Enclosure</li></ul>

Electrical connection with housing cover	Designation
<p>A0021857</p>	<b>M12 plug</b> <ul style="list-style-type: none"><li>■ <b>Material of housing cover, plastic:</b> PPSU</li><li>■ <b>Degree of protection:</b> IP65/67 NEMA Type 4X Enclosure</li></ul>


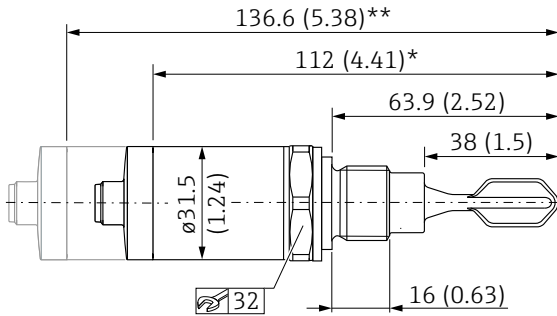
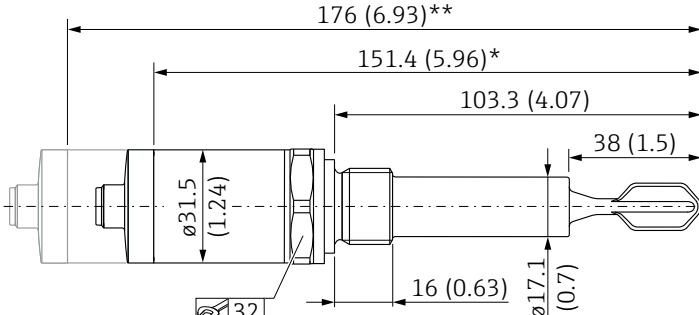
Tuning fork

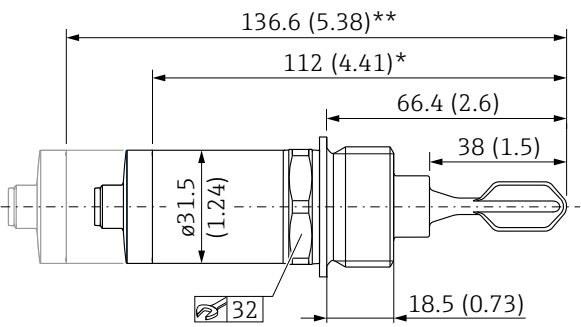
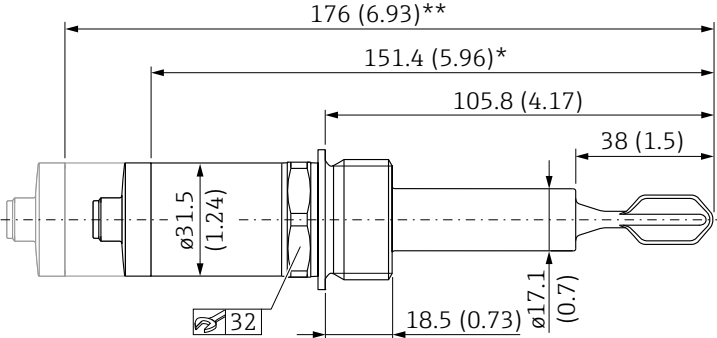
Dimensions

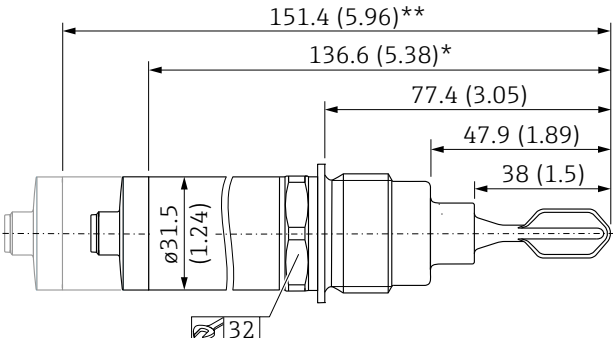
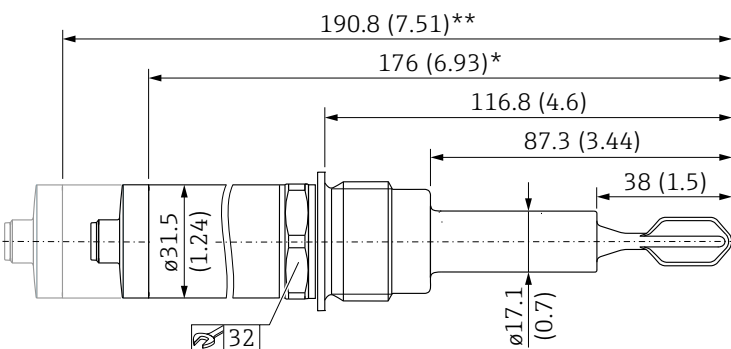
Dimensions mm (in)

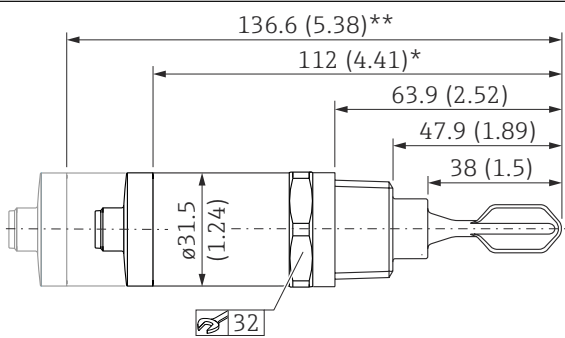
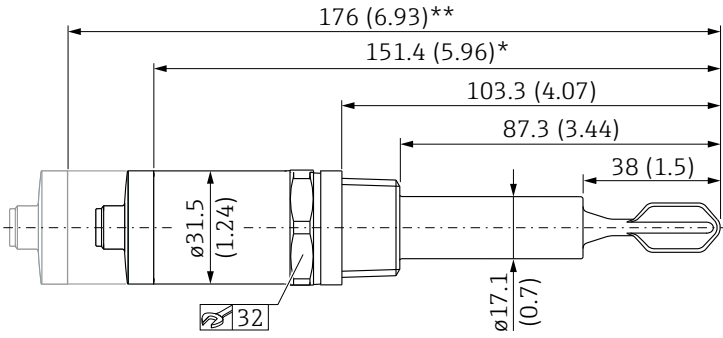
<p>A0022250</p>
-----------------

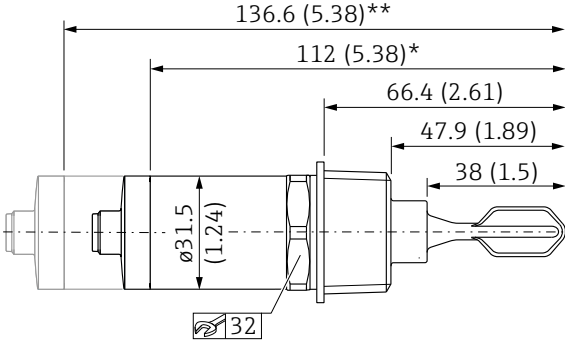
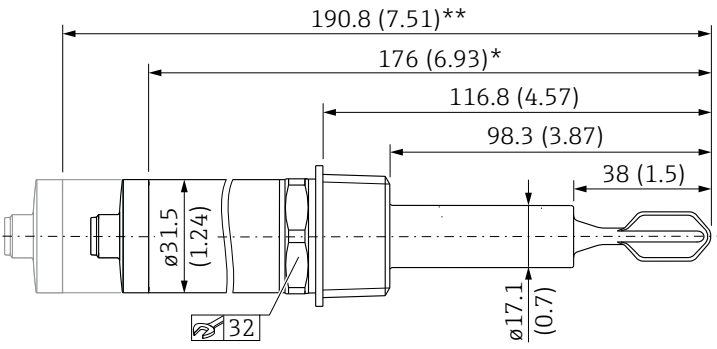


Sensor type	Dimensions		
	Dimensions mm (in)		
	The total dimensions of the device can vary depending on the plug selected.		
	<b>Information on the following tables</b>		
	<ul style="list-style-type: none"><li>■ Meaning of symbols:<ul style="list-style-type: none"><li>* Dimension for process temperature max. 100 °C (212 °F)</li><li>** Dimension for process temperature max. 150 °C (302 °F)</li></ul></li><li>■ If several versions have the same dimensions, one example of the compact version and one example of the short tube version is given.</li><li>■ The versions in the second column refer to the process connections in the product structure.</li></ul>		
	 For detailed information, see "Technical Information" TI00426F (Weld-in adapters, process adapters and flanges)		
	Available in the Download Area of the Endress+Hauser website ( <a href="http://www.endress.com/downloads">www.endress.com/downloads</a> ).		
Dimensions	Version	Description	
 <p>136.6 (5.38)**</p> <p>112 (4.41)*</p> <p>63.9 (2.52)</p> <p>38 (1.5)</p> <p>16 (0.63)</p> <p>Ø 31.5 (1.24)</p> <p>32</p> <p>7 Compact version, example G 1/2"</p> <p>A0021787</p>	WBJ WCJ	<b>Thread ISO 228 G 1/2"</b> <b>Thread ISO 228 G 3/4"</b>	
 <p>176 (6.93)**</p> <p>151.4 (5.96)*</p> <p>103.3 (4.07)</p> <p>38 (1.5)</p> <p>16 (0.63)</p> <p>Ø 31.5 (1.24)</p> <p>32</p> <p>17.1 (0.7)</p> <p>8 Short tube version, example G 1/2"</p> <p>A0021883</p>	W5J	<b>Thread ISO 228 G 3/4" for flush mount installation in weld-in adapter</b>	
		<ul style="list-style-type: none"><li>■ Material: 316L</li><li>■ Scope of delivery: flat seal (FA)</li><li>■ Pressure and temperature (maximum): +40 bar (+580 psi) at +150 °C (+302 °F)</li></ul>	
		<ul style="list-style-type: none"><li>■ Material: 316L</li><li>■ Scope of delivery: flat seal (FA)</li></ul>	
		Accessory: weld-in adapter	
		<ul style="list-style-type: none"><li>■ Scope of delivery: seal (VMQ)</li><li>■ Pressure and temperature (maximum): +25 bar (+352 psi) at +150 °C (+302 °F) +40 bar (+580 psi) at +100 °C (+212 °F)</li></ul>	
		The dimensions apply for G 1/2"; G 3/4" and G 3/4" for flush mount installation.	

Dimensions	Version	Description
 <p> <b>9 Compact version</b>  <small>A0022232</small> </p>  <p> <b>10 Short tube version</b>  <small>A0022231</small> </p>	WDJ	<b>Thread ISO 228 G 1"</b> <ul style="list-style-type: none"> <li>Material: 316L</li> <li>Scope of delivery: flat seal (FA)</li> <li>Pressure and temperature (maximum): +40 bar (+580 psi) at +150 °C (+302 °F)</li> </ul>

Dimensions	Version	Description
 <p> <b>11 Compact version</b>  <small>A0022008</small> </p>  <p> <b>12 Short tube version</b>  <small>A0022007</small> </p>	WSJ	<b>Thread ISO 228 G 1"</b> <b>for flush mount installation in weld-in adapter</b> <ul style="list-style-type: none"> <li>Material: 316L</li> <li>Scope of delivery: flat seal (FA)</li> </ul> <p>Accessory: weld-in adapter</p> <ul style="list-style-type: none"> <li>Scope of delivery: seal (VMQ)</li> <li>Pressure and temperature (maximum): +25 bar (+362 psi) at +150 °C (+302 °F) +40 bar (+580 psi) at +100 °C (+212 °F)</li> </ul>

Dimensions	Version	Description
 <p>136.6 (5.38)**</p> <p>112 (4.41)*</p> <p>63.9 (2.52)</p> <p>47.9 (1.89)</p> <p>38 (1.5)</p> <p>Ø31.5 (1.24)</p> <p>32</p> <p>A0021788</p> <p>13 Compact version, example MNPT 3/4"</p>	VAJ VBJ XBJ XCJ	<b>Thread ASME MNPT 1/2"</b> <b>Thread ASME MNPT 3/4"</b> <b>Thread EN10226 R 1/2"</b> <b>Thread EN10226 R 3/4"</b>  Pressure and temperature (maximum): +40 bar (+580 psi) at +150 °C (+302 °F)  The dimensions apply for MNPT 1/2", MNPT 3/4", R 1/2" and R 3/4".
 <p>176 (6.93)**</p> <p>151.4 (5.96)*</p> <p>103.3 (4.07)</p> <p>87.3 (3.44)</p> <p>38 (1.5)</p> <p>Ø31.5 (1.24)</p> <p>32</p> <p>Ø17.1 (0.7)</p> <p>A0021895</p> <p>14 Short tube version, example MNPT 3/4"</p>		

Dimensions	Version	Description
 <p>15 Compact version, example MNPT 1"</p>	VCJ XDJ	<b>Thread ASME MNPT 1"</b> <b>Thread EN10226 R 1"</b> Pressure and temperature (maximum): +40 bar (+580 psi) at +150 °C (+302 °F) The dimensions apply for MNPT 1" and R 1".
 <p>16 Short tube version, example MNPT 1"</p>		

**i** Pay attention to the temperature and pressure specifications for seals used at the customer site.

**i** Endress+Hauser supplies DIN/EN process connections with threaded connection in stainless steel in accordance with AISI 316L (DIN/EN material number 1.4404 or 1.4435). In terms of their stability-temperature property, the materials 1.4404 and 1.4435 are grouped in EN 1092-1 table 18 under 13EO. The chemical composition of the two materials can be identical.

Weight	Sensor type	Weight
	Compact version with process adapter G ½" and valve plug for process temperature up to 100 °C (212 °F)	Approx. 140 g (4.938 oz)
	Short tube version with process adapter G ½" and valve plug for process temperature up to 150 °C (302 °F)	Approx. 169 g (5.961 oz)

## Materials

Material specifications in accordance with AISI and DIN EN.

### Materials in contact with process

Component part	Material
Tuning fork	316L
Process adapter	316L (1.4404/1.4435)
Short tube	316L (1.4404/1.4435)
Seal for weld-in adapter with G ¾", G 1"	VMQ
Flat seal	FA (composite material based on aramid fibers combined with NBR)

*Materials not in contact with process*

Component part	Material
Housing cover with M12 plug (IP65/67)	PPSU
Housing cover with M12 plug (IP66/68/69)	316L (1.4404/1.4435)
Design ring	PBT/PC
Housing	316L (1.4404/1.4435)

---

**Surface roughness**

Metallic surface in contact with process:




Ra ≤3.2 µm (126 µin)



The surface is not defined in the area of the welding seam.

## Operability

### LED indicator

		
Position	LED color	Description of function
1	green (gn)	Status/communication <ul style="list-style-type: none"> <li>■ Lit: SIO mode</li> <li>■ Flashing: active communication, flash frequency </li> <li>■ Flashing with increased luminosity: device search (device identification), flash frequency </li> </ul>
2	yellow (ye)1	Switch status/switch output 1 With IO-Link communication in accordance with customer calibration: sensor is covered by medium.
3	red (rd)	Warning/Maintenance required Flashing: error remediable, e.g. invalid calibration Fault/device failure Lit: see Diagnostics and troubleshooting
4	yellow (ye)2	Switch status/switch output 2 <sup>1)</sup> With IO-Link communication in accordance with customer calibration: sensor is covered by medium.

A0036944

1) Activated only if both switch outputs are active.

**i** On the metal housing cover (IP69), there is no external signaling via LEDs. A connecting cable with an M12 plug and LED display can be optionally ordered as an accessory. See the "Accessories" section

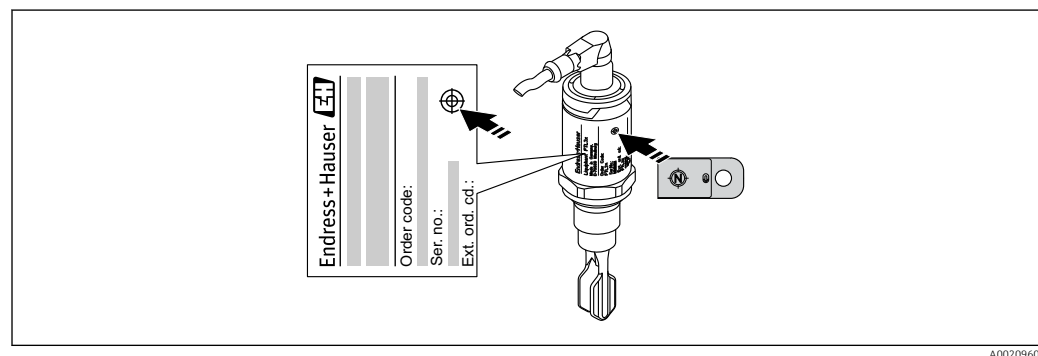
### Function test with test magnet

Carry out a function test while the device is in operation.


- Hold the test magnet for at least 2 s against the marking on the housing.
  - ↳ This inverts the current switch status, and the yellow LED changes state. When the magnet is removed, the switching status valid at that time is adopted.

If the test magnet is held against the marking for longer than 30 s, the red LED will flash: The device returns automatically to the current switch status.

**i** The test magnet is not included in the scope of delivery. It can optionally be ordered as an accessory. See the "Accessories" -> "Additional accessories" section




A0020960

 17 Position for test magnet on housing

## Certificates and approvals



The following documents are also available in the Download Area of the Endress+Hauser website: [www.endress.com](http://www.endress.com) → Downloads.

<b>CE mark</b>	The measuring system is in conformity with the statutory requirements of the applicable EC Directives. These are listed in the corresponding EC Declaration of Conformity along with the standards applied. Endress+Hauser confirms successful testing of the device by affixing to it the CE mark.
<b>EAC conformity</b>	The measuring system meets the legal requirements of the applicable EAC guidelines. These are listed in the corresponding EAC Declaration of Conformity together with the standards applied. Endress+Hauser confirms successful testing of the device by affixing to it the EAC mark.
<b>RCM-Tick marking</b>	The supplied product or measuring system meets the ACMA (Australian Communications and Media Authority) requirements for network integrity, interoperability, performance characteristics as well as health and safety regulations. Here, especially the regulatory arrangements for electromagnetic compatibility are met. The products are labelled with the RCM- Tick marking on the name plate.  <div style="text-align: center;"></div> <small>A0029561</small>
<b>Approval</b>	CSA C/US General Purpose
<b>CRN approval</b>	Versions with a CRN approval (Canadian Registration Number) are listed in the corresponding registration documents. CRN-approved devices are labeled with registration number 0F16950.5C on the nameplate. For further details on the maximum pressure values, see the Download Area of the Endress+Hauser website.
<b>Inspection certificates</b>	The following documents can be ordered with the device (optional): <ul style="list-style-type: none"> <li>■ Acceptance test certificate as per EN 10204-3.1</li> <li>■ Final inspection report</li> </ul>
<b>Manufacturer declarations</b>	The following manufacturer declarations can be ordered (optional): <ul style="list-style-type: none"> <li>■ FDA conformity</li> <li>■ TSE-free, materials free from animal origin</li> <li>■ ROHS-compliant in accordance with Endress+Hauser regulation</li> </ul>
<b>Pressure Equipment Directive</b>	The device does not fall within the scope of Pressure Equipment Directive 97/23/EC as it does not have a pressurized housing as defined in Article 1, Section 2.1.4 of the directive.
<b>Other standards and guidelines</b>	The applicable European guidelines and standards can be found in the relevant EU Declarations of Conformity.

## Ordering information

### Ordering information

Detailed ordering information is available from your nearest sales organization [www.addresses.endress.com](http://www.addresses.endress.com) or in the Product Configurator under [www.endress.com](http://www.endress.com).



#### Product Configurator - the tool for individual product configuration

- Up-to-the-minute configuration data
- Depending on the device: Direct input of measuring point-specific information such as measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format
- Ability to order directly in the Endress+Hauser Online Shop

### Services (optional)

In addition, the following services can be selected via the product structure in the Product Configurator:

- Cleaned of oil+grease
- PWIS-free (PWIS = paint-wetting impairment substances)
- Density setting  $> 0.5 \text{ g/cm}^3$
- Switching delay setting


## Accessories

### Weld-in adapter

Various weld-in adapters are available for installation in vessels or pipes.



The adapters are optionally available with inspection certificate 3.1 EN10204.

View (example)	Description
 <p>1 Leakage hole</p> <p>A0023557</p>	<b>G 3/4"</b> ø29 pipe installation ø50 vessel installation FDA-listed materials as per 21 CFR Part 175-178
	<b>G 1"</b> ø53 pipe installation ø60 vessel installation

If installed horizontally and weld-in adapters with a leakage hole are used, ensure that the leakage hole is pointing down. This allows leaks to be detected as quickly as possible.



For detailed information, see "Technical Information" TI00426F (Weld-in adapters, process adapters and flanges)

Available in the Download Area of the Endress+Hauser website ([www.endress.com/downloads](http://www.endress.com/downloads)).

### Plug-in jack, cable



The plug-in jacks listed are suitable for use in the temperature range  $-25$  to  $+70 \text{ °C}$  ( $-13$  to  $+158 \text{ °F}$ ).



Engineering unit mm (in)

Plug-in jack M12 IP69 with LED	Description	Order number
<p>A0020871</p>	<ul style="list-style-type: none"><li>▪ Elbowed 90°</li><li>▪ Terminated at one end</li><li>▪ 5 m (16 ft) PVC cable (orange)</li><li>▪ Slotted nut 316L</li><li>▪ Body: PVC (transparent)</li></ul>	52018763

Plug-in jack M12 IP67	Description	Order number
<p>A0022292</p>	<ul style="list-style-type: none"><li>▪ Elbowed 90°</li><li>▪ 5 m (16 ft) PVC cable (gray)</li><li>▪ Slotted nut Cu Sn/Ni</li><li>▪ Body: PUR (black)</li></ul>	52010285

Wire colors for M12 plug: 1 = BN (brown), 2 = WT (white), 3 = BU (blue), 4 = BK (black)

Plug-in jack M12 IP67	Description	Order number
<p>A0022293</p>	<ul style="list-style-type: none"><li>▪ Self-terminated connection to M12 plug</li><li>▪ Slotted nut Cu Sn/Ni</li><li>▪ Body: PBT</li></ul>	52006263

Additional accessories

Socket wrench for mounting	Description	Order number
<p>A0022273</p>	<ul style="list-style-type: none"><li>▪ Hexagonal</li><li>▪ Size across flats AF32</li></ul>	52010156

Test magnet	Description	Order number
<p>A0021732</p>	Information in "Operation" section	71267011

## Supplementary documentation



For an overview of the scope of the associated Technical Documentation, refer to the following:

- *W@M Device Viewer* ([www.endress.com/deviceviewer](http://www.endress.com/deviceviewer)): Enter the serial number from nameplate
- *Endress+Hauser Operations App*: Enter the serial number from the nameplate or scan the 2D matrix code (QR code) on the nameplate

---

### Operating Instructions Liquiphant FTL31



BA01285F

---

### Operating Instructions Liquiphant FTL31 IO-Link



BA01935F

---

### Additional documentation

#### Weld-in adapter, process adapter and flanges (overview)



TI00426F

#### Weld-in adapter (installation instructions)



SD01622Z

#### Valve plug (installation instructions)



SD00356F

---

### Certificates

#### Overfill protection



ZE01010F

#### Leak



ZE01011F

---



[www.addresses.endress.com](http://www.addresses.endress.com)

---