


# Point level detection in liquids and bulk solids

## Selection and engineering guide

Level

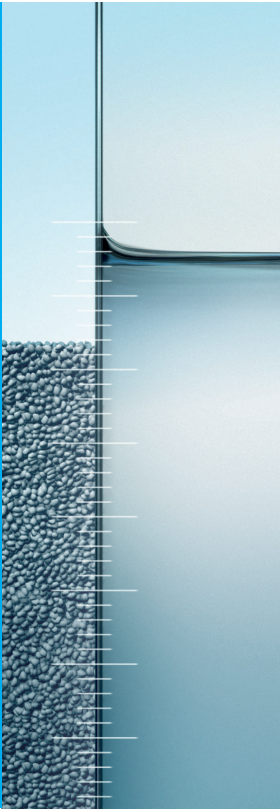

## Legende

- Point level detection in liquids starting page 3




- Point level detection in bulk solids starting page 39



# Point level detection in liquids

## Selection and engineering guide

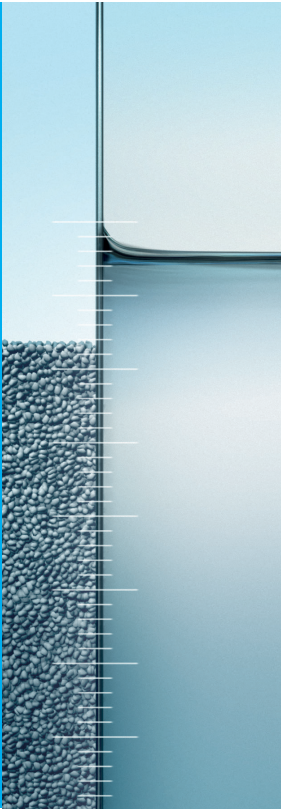

## Step by step

This selection and engineering guide provides information on different measuring principles for point level detection as well as their application and installation.

The pamphlet contains two chapters: Point level detection in liquids and point level detection in bulk solids.

This pamphlet exclusively concerns point level detection. A separate selection guide is available for continuous level measurement (see supplementary documentation CP00023F).

# A

### Overview of measuring principles

The first pages contain an overview of measuring principles for point level detection of Endress+Hauser in diagrams. Subsequently, the mode of operation of the measuring principle and the respective product family are introduced.

### Checklist

You should know the specific requirements of your application for the selection of a suitable point level switch. The checklist provides an overview and is supposed to assist you in acquiring this data and taking it as completely as possible into consideration.

# B

### Selection of the measuring principles

The suitable measuring principle is selected according to two criteria:

- application and
- process requirements.

First, the measuring principles are listed in accordance with specific plant criteria (vessel, conveyor belt, etc.) and then in accordance with specific medium criteria (high temperatures, aggressiveness, etc.) Select the measuring principle which meets, if possible, all of the criteria demanded by you or your plant. The measuring principles are listed from left to right according to their suitability. The ideal measuring principle is listed first and edged in blue.

# C

### Selection of the instrument

You now move to the area of the selected measuring principle where you can choose the suitable instrument of a product family. Compare your application and process data with the instrument data.

### Engineering

After the selection of the optimum instrument, please check the installation instructions at the end of the respective measuring principle. You will find basic guidelines supporting safe instrument installation and application.

## Contents

1.	Overview of measuring principles .....	<b>6</b>
2.	Checklist .....	<b>11</b>
3.1	Selection of measuring principle according to application .....	<b>12</b>
	▪ Tank / vessel .....	12
	▪ Piping .....	14
3.2	Selection of measuring principle according to process requirements .....	<b>16</b>
	▪ Aggressive media .....	16
	▪ High process pressures / high process temperatures .....	18
	▪ Low temperature requirements .....	20
	▪ Foaming media (e.g. vacuum, filling) .....	22
	▪ Build-up forming media (e.g. highly viscous, pasty, tacky) .....	24
	▪ Hygiene requirements .....	26
4.	Instrument selection within the measuring principle/ installation instructions .....	<b>28</b>
	▪ Vibronics: Liquiphant .....	28
	▪ Capacitance: Liquicap .....	32
	▪ Conductive: Liquipoint .....	34
	▪ Float switch: Liquifloat .....	37
	▪ Radiometry: The radiometric measuring principle is not considered in this section. Please contact our application consultants in your country for detailed information.	

A

B


C

## 1. Overview of measuring principles

## Segmentation



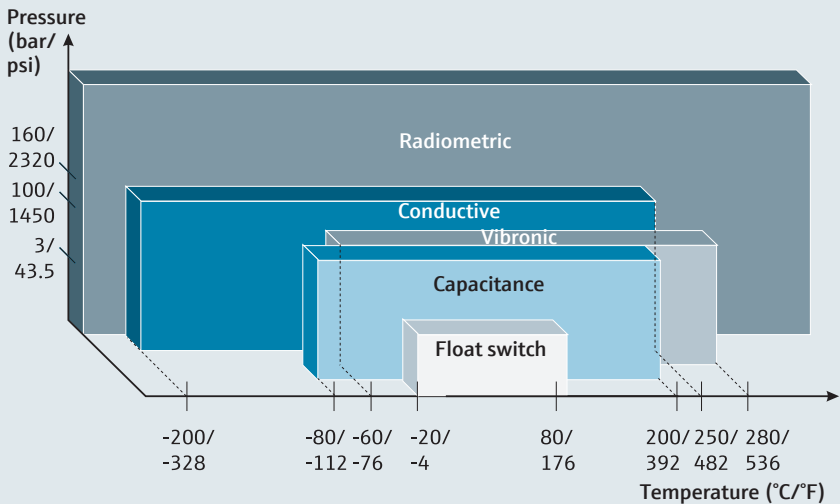

	Point level	Continuous
Liquids	Vibronic Conductive Capacitance Float switch Radiometric	Radar Guided radar Ultrasonic Hydrostatic Capacitance Radiometric
Bulk solids	Vibronic Capacitance Paddle Microwave barrier Radiometric	Radar Guided radar Ultrasonic Electromechanical system Radiometric

## Process conditions




### Flexible answers to individual needs.

The basic idea of the FLEX structure is that depending on the application, there are different goals to achieve and different challenges to overcome. Some processes you must just monitor, others you want to optimize. Here is an overview of our selections:

<p><b>Xpert</b> Selection</p>	<p>Master your most challenging applications</p>	<ul style="list-style-type: none"> <li>■ Specialized products</li> <li>■ Designed for demanding applications</li> </ul>	
<p><b>Extended</b> Selection</p>	<p>Optimize your processes with innovative technologies</p>	<ul style="list-style-type: none"> <li>■ High-end products</li> <li>■ Highly functional and convenient</li> </ul>	
<p><b>Lean</b> Selection</p>	<p>Handle your core processes easily</p>	<ul style="list-style-type: none"> <li>■ Standard products</li> <li>■ Reliable, robust and low-maintenance</li> </ul>	
<p><b>Fundamental</b> Selection</p>	<p>Meet your basic measurement needs</p>	<ul style="list-style-type: none"> <li>■ Simple products</li> <li>■ Easy to select, install and operate</li> </ul>	

## 1. Overview of measuring principles

## Contact measuring principles


**Vibronic**

A sensor in form of a tuning fork is excited at its resonant frequency. The drive works piezoelectrically. The oscillating frequency changes as the fork enters the medium. The change is analyzed and translated into a switching signal.

**Liquiphant**

Free of calibration and maintenance. For all liquids, also if build-up, turbulence or air bubbles occur. Unaffected by the electric properties of the medium.

Process temperatures up to +280°C/+536°F  
Process pressures up to 100bar/1,450psi


**Conductive**

The resistance between two measuring electrodes changes by the presence or absence of a medium. In single-rod probes, the electrically conductive tank wall serves as a counter electrode.

**Liquipoint**

Simple and price-effective. For conductive liquids like water, waste water and liquid foods, etc.

Process temperatures up to +250°C/+482°F  
Process pressures up to 160bar/2,320psi

**Capacitance**


A capacitance probe may be compared to an electric condenser. As the tank is filled, the probe capacity increases. This change is electrically analyzed.

**Liquicap**

Available with active build-up compensation for highly viscous media.

Process temperatures up to +200°C/+392°F  
Process pressures up to 100bar/1,450psi



**Float switch**


As the switch floats up and down on the surface of a liquid, an installed sensor detects its position and triggers the switching operation.

**Liquifloat**

Simple and price-effective. For liquids like water, waste water, acids and lyes.

Process temperatures up to +85°C/+185°F  
Process pressures up to 3bar/43.5psi

## Non-contact measuring principles

**Radiometry**

The gamma source, a cesium or cobalt isotope, emits radiation which is attenuated as it passes through materials. The measuring effect results from the absorption of radiation by the product to be measured which is caused by level changes.

The measuring system consists of a source and a detector as a receiver.

**Gammapilot**

Non-contact measurement from outside, for all extreme applications, e.g. very abrasive, corrosive and aggressive media.

Any process temperature  
Any process pressure

For more detailed information, please contact our application consultant in your country or use the Applicator selection software.

## 2. Checklist

You need to know your specific application requirements for a correct selection. The checklist opposite provides an overview of relevant process data and is supposed to help you to take these into consideration. If we have not included all of the data, please supplement this list with your criteria.

The checklist is used both for the selection of the measuring principle and the selection of the instrument.



### TIP

Copy this checklist and complete it to have all relevant data readily available for the selection.

### The most important terms/abbreviations

ATEX	AT= Atmosphere, EX = Explosive. Abbreviation of the French working title of the EU Guideline 94/9/EC
WHG	Wasserhaushaltsgesetz. Overfill prevention/leakage alarms are certified according to WHG
SIL	Safety Integrity Level. Safety levels according to IEC 61508/61511
VdTÜV100	Liquefied gas approval

### Electronics

IO-Link	Communication system for connecting intelligent sensors and actuators to an automation system
3-wire	Connection for Endress+Hauser switching unit
AC	Connection for alternating voltage
DC-PNP	Connection for direct voltage with transistor output (open collector)
Relay + DPDT	Double Pole Double Throw; relay as double change-over contact
PFM	PulseFrequencyModulation; extremely interference-proof signal transmission between sensor electronics and switching unit
NAMUR	Direct current interface for sensors and switching amplifiers (IEC 60947-5-6)
PROFIBUS®	Fieldbus technology PROFIBUS PA
HART®	Fieldbus technology
FF	FOUNDATION™ fieldbus

### Instrumentation

Compact	Signal output is directly available from probe electronics (e.g. DC-PNP, relay SPST)
Separate instrument.	Signal output is available via an additional switching unit (top-hat rail or 19" card) (e.g. relay SPDT). The switching unit also supplies the sensor with power



### Certification

EHEDG	„European Hygienic Equipment Design Group“. An independent group with different subgroups which discuss special subjects concerning hygiene requirements and prepare their publication
3-A	„3-A Sanitary Standards“ are voluntary norms of the American „International Association of Milk, Food and Environmental Sanitarian“
FDA	„Food and Drug Administration“. American approval authority. Materials, special plastics are subject to respective guidelines for their use in pharmaceutical/food plants
3.1	Material test certificate for special steels
NACE	„National Association of Corrosion Engineering“. Material test certificate for special steels including degree of hardness and cooling/annealing temperature of steel

		Please complete		Notes
<b>Medium</b>	Medium			
	Density	g/cm <sup>3</sup>		
	Conductivity	µS/cm		
	Dielectric constant (DC)			
	Viscosity			
	Resistance/e.g. coating			
	Build-up forming	yes	no	
<b>Non-contact measurement</b>		yes	no	
<b>Measurement task</b>	Point level detection	min.	max.	
	Overflow prevention	yes	no	
	Two-point control	yes	no	
	Dry-run protection	yes	no	
	Density measurement	yes	no	
<b>Process data</b>	Process temperature	min.	max.	
	Process pressure	min.	max.	
<b>Installation</b>	Sensor installation from the top	yes	no	
	Sensor installation laterally	yes	no	
	Tank	yes	no	
	Piping	yes	no	
	Switch point (sensor length)	mm		
	Type of connection			
<b>Electric connection</b>	DC, AC, relay, PNP, PFM, PROFIBUS®, NAMUR, 8/16mA			
<b>Surface requirements</b>	Roughness	µm		
	Coating	yes	no	
	Labsfree	yes	no	
	Others			
<b>Approvals</b>	Ex (dust)	yes	no	
	Ex (gas)	yes	no	
	WHG	yes	no	
	Ship building	yes	no	
	EHEDG	yes	no	
	3-A	yes	no	
<b>Certificates/ manufacturer declarations</b>	3.1	yes	no	
	NACE	yes	no	
	FDA listed material	yes	no	
	SIL	yes	no	
	EG1935	yes	no	
<b>Special requirements</b>				


### 3.1 Selection of measuring principle according to application

B

Our proposal		
	<b>Vibronic Liquiphant</b> 	<b>Capacitance Liquicap M</b> 
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Safe and easy to use</li> <li>■ Free of calibration and maintenance</li> <li>■ Unaffected by medium</li> <li>■ May be used in applications involving turbulences, gassing liquids and build-up forming media</li> <li>■ Developed according to SIL IEC 61508</li> <li>■ LED and Bluetooth module, Heartbeat Technology</li> </ul>	<ul style="list-style-type: none"> <li>■ Universally adaptable probe technology</li> <li>■ Reliable operation also in strong build-up formation and viscous media</li> <li>■ Foam causes capacity change and is recognized</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process temperature</li> <li>■ Ambient temperature</li> <li>■ Process pressure</li> <li>■ Medium properties</li> <li>■ Sensor length</li> </ul> <p>-60 to +280°C/-76 to +536°F -60 to +70°C/-76 to +158°F -1 to +100bar/-14.5 to 1,450psi Viscosity up to 10.000 mPas ≤ 6.000mm/≤ 236"</p> <ul style="list-style-type: none"> <li>■ Process connection</li> <li>■ Supply/Communication</li> <li>■ Approvals</li> </ul> <p>Thread, flange, hygiene AC-2-wire, 8/16mA HART, IO-Link, DC-PNP, 3-wire, relay, NAMUR, PFM Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL</p>	<ul style="list-style-type: none"> <li>■ Process temperature</li> <li>■ Ambient temperature</li> <li>■ Process pressure</li> <li>■ Medium properties</li> <li>■ Sensor length</li> </ul> <p>-80 to +200°C/-112 to +392°F -50 to +120°C/-58 to +248°F -1 to +100bar/-14.5 to 1,450psi — 100 to 10,000mm/3.9 to 394"</p> <ul style="list-style-type: none"> <li>■ Process connection</li> <li>■ Supply/Communication</li> <li>■ Approvals</li> </ul> <p>Thread, flange, hygiene AC-2-wire, DC-PNP 3-wire, 3-wire 3 to 12V, relay, 8/16mA, NAMUR Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL</p>
<b>Application limits</b>	<ul style="list-style-type: none"> <li>■ For viscous media see capacitance with build-up compensation</li> <li>■ Standard instruments do not recognize foam as a liquid</li> </ul>	<ul style="list-style-type: none"> <li>■ Condensate formation in nozzle – select inactive length</li> <li>■ DC &lt; 1.6</li> </ul>

**✓ Tank / vessel**

- Operational point level
- Overfill prevention (WHG)
- Leakage monitoring
- Changing media
- Turbulences



B

**Conductive  
Liquipoint T**



- Very simple measuring principle, easy handling
- Multipoint detection with one process connection
- Simple rod adjustment
- Compact or separate instrumentation

-200 to +250°C/-328 to +482°F  
-200 to +250°C/-328 to +482°F

-1 to 160bar/-14.5 to 2,320psi  
—  
50 to 15,000mm/2 to 590"

Thread, flange  
PNP, relay, NAMUR

Regional Ex approvals

- Conductive foam is recognized as a liquid
- Conductivity too low (< 10µS/cm)
- Electrode corrosion

**Float switch  
Liquifloat T**



- Simple and price-effective
- Connecting cable for different media (resistance)

-20 to +85°C/-4 to +185°F  
-20 to +85°C/-4 to +185°F

0 to 3bar/0 to 43.5psi  
—  
5,000 to 20,000mm/  
197" to 787" cable  
Cable feedthrough  
AC/DC 3-wire, NAMUR

ATEX

- Medium density < 0.8g/cm<sup>3</sup>
- Medium viscosity
- Lye and acid resistance is limited

**Radiometric  
Gammapilot**



- Non-contact from outside
- Exact measurement under extreme conditions
- Monitoring of build-up formation

As required  
-40 to +120°C/-40 to +248°F  
(starting 80°C/176°F water cooling)

As required  
As required



From outside with assembly clamp  
2-wire 4 to 20mA HART, relay, 8/16mA

Regional Ex approvals, WHG, SIL

- Observe radiation protection provisions
- Further information from our sales team
- Applicator for configuring the measuring point


### 3.1 Selection of measuring principle according to application

B

Our proposal		
	Vibronic Liquiphant	Conductive Liquipoint
		
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Safe and easy to use</li> <li>■ Free of calibration and maintenance</li> <li>■ Unaffected by medium</li> <li>■ May be used in applications involving turbulences, gassing liquids and build-up forming media</li> <li>■ Developed according to SIL IEC 61508</li> <li>■ LED and Bluetooth module, Heartbeat Technology</li> </ul>	<ul style="list-style-type: none"> <li>■ Truly flush mounted installation</li> <li>■ Continuous functionality through changing media</li> <li>■ Reliable point level detection even with build-up</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process temperature -60 to +280°C/-76 to +536°F</li> <li>■ Ambient temperature -60 to +70°C/-76 to +158°F</li> <li>■ Process pressure -1 to +100bar/-14.5 to 1,450psi</li> <li>■ Medium properties Viscosity up to 10.000 mPas</li> <li>■ Sensor length ≤ 6.000mm/≤ 236"</li> <li>■ Process connection Thread, flange, hygiene</li> <li>■ Supply/Communication AC-2-wire, 8/16mA HART, IO-Link, DC-PNP, 3-wire, relay, NAMUR, PFM</li> <li>■ Approvals Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL</li> </ul>	<ul style="list-style-type: none"> <li>-20 to +100°C/-4 to +212°F</li> <li>-40 to +70°C/-40 to +158°F</li> <li>-1 to +25bar/-14.5 to 362,5psi</li> <li>–</li> <li>1 µS/cm to 100 mS/cm</li> <li>Thread, hygiene</li> <li>DC-PNP, IO-Link, 3-wire PNP</li> <li>Hygiene approvals</li> </ul>
<b>Application limits</b>	<ul style="list-style-type: none"> <li>■ Bridging by hardening build-up</li> <li>■ Flow losses in pipes due to sensor design</li> <li>■ Solid content in medium</li> </ul>	<ul style="list-style-type: none"> <li>■ Non-conductive media</li> <li>■ Dry, non-conductive build-up</li> </ul>

**✓ Piping**

- Installation in pipes as pump or dry-run protection
- Changing media
- Turbulences
- Nominal width of pipe starting DN25



B

**Capacitance  
Liquicap M**



- Universally adaptable probe technology
- Reliable operation also in strong build-up formation and viscous media
- Foam causes capacity change and is recognized

**Radiometric  
Gammapilot**



- Non-contact from outside
- Exact measurement under extreme conditions
- Monitoring of build-up formation

-80 to +200°C/-112 to +392°F  
-50 to +120°C/-58 to +248°F

-1 to +100bar/-14.5 to 1,450psi

100 to 10,000mm/3.9 to 394"

Thread, flange, hygiene

AC-2-wire, DC-PNP 3-wire, 3-wire

3 to 12V, relay, 8/16mA, NAMUR

Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL

- Condensate formation in nozzle – select inactive length
- DC < 1.6

As required  
-40 to +120°C/-40 to +248°F  
(starting 80°C/176°F water cooling)

As required

As required

–

From outside with assembly clamp

2-wire 4 to 20mA HART, relay, 8/16mA

Regional Ex approvals, WHG, SIL

- Observe radiation protection provisions
- Further information from our sales team
- Applicator for configuring the measuring point

### 3.2 Selection of measuring principle according to process requirements

B

Our proposal

**Vibronic  
Liquiphant**



**Capacitance  
Liquicap M**




<p><b>Advantages</b></p>	<ul style="list-style-type: none"> <li>■ Gastight process seal (Second Line of Defense)</li> <li>■ Self-monitoring for build-up and corrosion</li> <li>■ Digital, safe and easy to use</li> <li>■ Developed according to SIL IEC 61508</li> <li>■ Coatings (ECTFE, PFA, Email), sensor in Alloy C22</li> <li>■ LED and Bluetooth module, Heartbeat Technology</li> </ul>	<ul style="list-style-type: none"> <li>■ Fully insulated probe (PFA/PTFE)</li> <li>■ Gastight process seal (Second Line of Defense)</li> <li>■ Developed according to SIL IEC 61508</li> <li>■ Foam causes capacity change and is recognized</li> </ul>
<p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>■ Process temperature</li> <li>■ Ambient temperature</li> <li>■ Process pressure</li> <li>■ Medium properties</li> <li>■ Sensor length</li> <li>■ Process connection</li> <li>■ Supply/Communication</li> <li>■ Approvals</li> </ul>	<p>-60 to +280°C/-76 to +536°F -60 to +70°C/-76 to +158°F</p> <p>-1 to +100bar/-14.5 to 1,450psi Viscosity up to 10,000 mPas ≤ 3,000mm/≤ 118" Thread, flange AC-2-wire, 8/16mA HART, DC-PNP, 3-wire, relay, NAMUR, PFM Regional Ex approvals, WHG, marine approvals, SIL</p>	<p>-80 to +200°C/-112 to +392°F -50 to +120°C/-58 to +248°F</p> <p>-1 to +100bar/-14.5 to 1,450psi – 100 to 10,000mm/3.9 to 394" Thread, flange, hygiene AC-2-wire, DC-PNP 3-wire, 3-wire 3 to 12V, relay, 8/16mA, NAMUR Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL</p>
<p><b>Application limit</b></p>	<ul style="list-style-type: none"> <li>■ For viscous media, see capacitance with build-up compensation</li> <li>■ Standard instruments do not recognize foam as a liquid</li> <li>■ Gas bubbles in pipes</li> </ul>	<ul style="list-style-type: none"> <li>■ Condensate formation in nozzle – select inactive length</li> <li>■ DC &lt; 1.6</li> </ul>



**✓ Aggressive media**  
(e.g. chemical industry applications)

- Coatings
- Functional safety (SIL)
- Gastight process seal (Second line of defense)
- Process monitoring



B

**Radiometric  
Gammapilot**



- Non-contact from outside
- Exact measurement under extreme conditions
- Monitoring of build-up formation

As required  
-40 to +120°C/-40 to +248°F  
(starting 80°C/176°F water cooling)  
As required  
As required  
—



From outside with assembly clamp  
2-wire 4 to 20mA HART, relay, 8/16mA

Regional Ex approvals, WHG, SIL

- Observe radiation protection provisions
- Further information from our sales team
- Applicator for configuring the measuring point


## 3.2 Selection of measuring principle according to process requirements

B

	Our proposal <b>Vibronic Liquiphant</b>	<b>Conductive One rod probe 11961Z</b>
		
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Gastight process seal (Second Line of Defense)</li> <li>■ Self-monitoring for build-up and corrosion</li> <li>■ Digital, safe and easy to use</li> <li>■ Developed according to SIL IEC 61508</li> <li>■ Unaffected by medium</li> <li>■ LED and Bluetooth module, Heartbeat Technology</li> <li>■ Optionally with coating for aggressive media</li> </ul>	<ul style="list-style-type: none"> <li>■ Safe and reliable measurement even in aggressive medium</li> <li>■ Can be deployed particularly with high pressure or vacuum</li> <li>■ Can be used for liquid gases</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process temperature -60 to +280°C/-76 to +536°F</li> <li>■ Ambient temperature -60 to +70°C/-76 to +158°F</li> <li>■ Process pressure -1 to +100bar/-14.5 to 1,450psi</li> <li>■ Medium properties –</li> <li>■ Sensor length ≤ 3,000mm/≤ 118"</li> <li>■ Process connection Thread, flange</li> <li>■ Supply/Communication AC-2-wire, 8/16mA HART, DC-PNP, 3-wire, relay, NAMUR, PFM</li> <li>■ Approvals Regional Ex approvals, WHG, marine approvals, SIL</li> </ul>	<ul style="list-style-type: none"> <li>■ -200 to +250°C/-328 to 482°F</li> <li>■ -200 to +250°C/-328 to 482°F</li> <li>■ -1 to +160bar/-15 to +2,320psi</li> <li>■ –</li> <li>■ 100 to 2.000mm/5.9 to 78.7"</li> <li>■ Thread</li> <li>■ –</li> <li>■ ATEX, WHG</li> </ul>
<b>Application limit</b>	<ul style="list-style-type: none"> <li>■ For viscous media, see capacitance probes with build-up compensation</li> <li>■ Standard instruments do not recognize foam as a liquid</li> <li>■ Gas bubbles in pipes</li> </ul>	<ul style="list-style-type: none"> <li>■ Observe medium conductivity</li> </ul>

**✓ High process pressures / high temperatures**  
(e.g. oil & gas industry)

- Materials according to NACE
- Gastight process seal (Second line of defense)
- Functional safety (SIL)
- Process monitoring



**Radiometric  
Gammapilot**



- Non-contact from outside
- Exact measurement under extreme conditions
- Monitoring of build-up formation

As required  
-40 to +120°C / -40 to +248°F  
(starting 80°C / 176°F water cooling)

As required

As required

—

From outside with assembly clamp

2-wire 4 to 20mA HART

Regional Ex approvals, WHG, SIL

- Observe radiation protection provisions
- Further information from our sales team
- Applicator for configuring the measuring point


### 3.2 Selection of measuring principle according to process requirements

B

	Our proposal Capacitance Liquicap M	Conductive One rod probe 11961Z
		
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Active build-up compensation</li> <li>■ Foam causes capacity change and is recognized</li> </ul>	<ul style="list-style-type: none"> <li>■ Safe and reliable measurement even in aggressive medium</li> <li>■ Can be deployed particularly with high pressure or vacuum</li> <li>■ Can be used for liquid gases</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process temperature: -80 to +200°C/-112 to +392°F</li> <li>■ Ambient temperature: -50 to +120°C/-58 to +184°F</li> <li>■ Process pressure: -1 to 100bar/-14.5 to 1,450psi</li> <li>■ Medium properties: –</li> <li>■ Sensor length: 100 to 10,000mm/3.9 to 394"</li> <li>■ Process connection: Thread, flange, hygiene</li> <li>■ Supply/Communication: AC-2-wire, DC-PNP 3-wire, 3-wire</li> <li>■ Approvals: 3 to 12V, relay, 8/16mA, NAMUR, Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL</li> </ul>	<ul style="list-style-type: none"> <li>■ Process temperature: -200 to +250°C/-328 to 482°F</li> <li>■ Ambient temperature: -200 to +250°C/-328 to 482°F</li> <li>■ Process pressure: -1 to +160bar/-15 to +2,320psi</li> <li>■ Medium properties: –</li> <li>■ Sensor length: 100 to 2.000mm/5.9 to 78.7"</li> <li>■ Process connection: Thread</li> <li>■ Supply/Communication: –</li> <li>■ Approvals: ATEX, WHG</li> </ul>
<b>Application limit</b>	<ul style="list-style-type: none"> <li>■ Condensate formation in nozzle – select inactive length</li> <li>■ DC &lt; 1.6</li> </ul>	<ul style="list-style-type: none"> <li>■ Observe medium conductivity</li> </ul>

**✓ Low temperature requirements**  
(e.g. refrigerating plant and cooling processes)

- Cryogenic conditions
- Functional safety (SIL)
- Build-up



B

**Vibronic  
Liquiphant**



**Radiometric  
Gammapilot**



- Gastight process seal (Second Line of Defense)
- Self-monitoring for build-up and corrosion
- Digital, safe and easy to use
- Developed according to SIL IEC 61508
- Unaffected by medium

- Non-contact from outside
- Exact measurement under extreme conditions
- Monitoring of build-up formation

-60 to +280°C/-76 to +536°F  
-60 to +70°C/-76 to +158°F

As required  
-40 to +120°C/-40 to +248°F  
(starting 80°C/176°F water cooling)

-1 to +100bar/-14.5 to 1,450psi

As required  
As required

≤ 6,000mm/≤ 236"

From outside with assembly clamp  
2-wire 4 to 20mA HART

Thread, flange

AC-2-wire, 8/16mA HART, IO-Link, DC-PNP,  
3-wire, relay, NAMUR, PFM

Regional Ex approvals, WHG, SIL



Regional Ex approvals, WHG, SIL

- For viscous media, see capacitance with build-up compensation
- Standard instruments do not recognize foam as a liquid
- Gas bubbles in pipes

- Observe radiation protection provisions
- Further information from our sales team
- Applicator for configuring the measuring point

### 3.2 Selection of measuring principle according to process requirements

B

	Our proposal <b>Vibronic Liquiphant</b>	<b>Capacitance Liquicap M</b>
		
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Free of calibration and maintenance</li> <li>■ Standard instruments do not recognize foam as a liquid</li> <li>■ Self-monitoring for build-up and corrosion</li> <li>■ Safe and easy to use</li> </ul>	<ul style="list-style-type: none"> <li>■ Foam causes capacity change and is recognized</li> <li>■ Reliable operation also in strong build-up</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process temperature -60 to +280°C/-76 to +536°F</li> <li>■ Ambient temperature -60 to +70°C/-76 to +158°F</li> <li>■ Process pressure -1 to +100bar/-14.5 to 1,450psi</li> <li>■ Medium properties –</li> <li>■ Sensor length ≤ 6,000mm/≤ 236"</li> <li>■ Process connection Thread, flange, hygiene</li> <li>■ Supply/Communication AC-2-wire, 8/16mA HART, IO-Link, DC-PNP, 3-wire, relay, NAMUR, PFM</li> <li>■ Approvals Regional Ex approvals, hygiene approvals, WHG, SIL</li> </ul>	<ul style="list-style-type: none"> <li>-80 to +200°C/-112 to +392°F</li> <li>-50 to +120°C/-58 to +248°F</li> <li>-1 to +100bar/-14.5 to +1,450psi</li> <li>–</li> <li>100 to 10,000mm/3.9 to 394"</li> <li>Thread, flange, hygiene</li> <li>AC-2-wire, DC-PNP 3-wire, 3-wire 3 to 12V, relay, 8/16mA, NAMUR</li> <li>Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL</li> </ul>
<b>Application limit</b>	<ul style="list-style-type: none"> <li>■ For viscous media, see capacitance probes with build-up compensation</li> <li>■ Gas bubbles in pipes</li> </ul>	<ul style="list-style-type: none"> <li>■ Non-conductive foam is not recognized as a liquid</li> <li>■ Condensate formation in nozzle – select inactive length</li> <li>■ DC &lt; 1.6</li> </ul>

**✓ Foaming media**  
(e.g. dairy, brewing or vacuum processes)

- Switch point setting
- Switching in foam or liquids
- Unaffected by gas bubble formation



B

**Conductive  
Liquipoint**



- Truly flush mounted installation
- Continuous functionality through changing media
- Reliable point level detection even with build-up
- Pasty and sticky media

-20 to +100°C/-4 to +212°F  
(+150°C/+302°F for 1 h)  
-40 to +70°C/-40 to +158°F

-1 to +25bar/-14.5 to 362,5psi  
1µS/cm to 100mS/cm

Thread, hygiene  
DC-PNP, IO-Link

Hygiene approvals

- Non-conductive media
- Dry, non-conductive build-up

**Radiometric  
Gammapilot**



- Non-contact from outside
- Exact measurement under extreme conditions
- Monitoring of build-up formation

As required

-40 to +120°C/-40 to +248°F  
(starting 80°C/176°F water cooling)

As required  
As required


From outside with assembly clamp  
2-wire 4 to 20mA HART, relay, 8/16mA

Regional Ex approvals, WHG, SIL

- Observe radiation protection provisions
- Further information from our sales team
- Applicator for configuring the measuring point

### 3.2 Selection of measuring principle according to process requirements


B

	Our proposal <b>Capacitance Liquicap M</b>	<b>Vibronic Liquiphant</b>
		
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Reliable operation also in strong build-up formation and highly viscous liquids</li> <li>■ Foam causes capacity change and is recognized</li> </ul>	<ul style="list-style-type: none"> <li>■ Digital, safe and easy to use</li> <li>■ Developed according to SIL IEC 61508</li> <li>■ Coatings (ECTFE, PFA, Email), sensor in Alloy C22</li> <li>■ Predictive maintenance and increased plant availability through Heartbeat Technology</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process temperature -80 to +200°C/-112 to +392°F</li> <li>■ Ambient temperature -50 to +120°C/-58 to +248°F</li> <li>■ Process pressure -1 to 100bar/-14.5 to 1,450psi</li> <li>■ Medium properties –</li> <li>■ Sensor length 100 to 10,000mm/3.9 to 394"</li> <li>■ Process connection Thread, flange</li> <li>■ Supply/Communication AC-2-wire, DC-PNP 3-wire, 3-wire 3 to 12V, relay, 8/16mA, NAMUR</li> <li>■ Approvals Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL</li> </ul>	<ul style="list-style-type: none"> <li>-60 to +280°C/-76 to +536°F</li> <li>-60 to +70°C/-76 to +158°F</li> <li>-1 to +100bar/-14.5 to 1,450psi</li> <li>–</li> <li>≤ 6,000mm/≤ 236"</li> <li>Thread, flange, hygiene</li> <li>AC-2-wire, 8/16mA HART, IO-Link, DC-PNP, 3-wire, relay, NAMUR, PFM</li> <li>Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL</li> </ul>
<b>Application limit</b>	<ul style="list-style-type: none"> <li>■ Condensate formation in nozzle – select inactive length</li> <li>■ DC &lt; 1.6</li> </ul>	<ul style="list-style-type: none"> <li>■ For viscous media, see capacitance with build-up compensation</li> <li>■ Standard instruments do not recognize foam as a liquid</li> <li>■ Gas bubbles in pipes</li> </ul>



**✓ Build-up forming media**  
(e.g. paints or milk of lime)

- Long-term stability by build-up compatibility or compensation
- Unaffected by gas bubble formation



B

**Conductive  
Liquipoint**



**Radiometric  
Gammapilot**



- Truly flush mounted installation
- Continuous functionality through changing media
- Reliable point level detection even with build-up
- Pasty and sticky media

- Non-contact from outside
- Exact measurement under extreme conditions
- Monitoring of build-up formation

-20 to +100°C/-4 to +212°F  
(+150°C/+302°F for 1 h)  
-40 to +70°C/-40 to +158°F

As required

-1 to +25bar/-14,5 to 362,5psi  
1μS/cm to 100mS/cm

-40 to +120°C/-40 to +248°F  
(starting 60°C/140°F water cooling)

As required  
As required

Thread, hygiene  
DC-PNP, IO-Link

From outside with assembly clamp  
2-wire 4 to 20mA HART, relay, 8/16mA

Hygiene approvals



Regional Ex approvals, WHG, SIL

- Non-conductive media
- Dry, non-conductive build-up

- Observe radiation protection provisions
- Further information from our sales team
- Applicator for configuring the measuring point


### 3.2 Selection of measuring principle according to process requirements

B

	Our proposal <b>Vibronic Liquiphant</b>	<b>Capacitance Liquicap M</b>
		
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Polished sensor surfaces Ra &lt; 0.3µm</li> <li>■ Self-monitoring for build-up and corrosion</li> <li>■ Hygiene process connections and housing designs</li> <li>■ FDA-conforming sensor materials</li> </ul>	<ul style="list-style-type: none"> <li>■ Tried and tested</li> <li>■ Hygienic process connection and housing</li> <li>■ FDA-conforming sensor materials</li> <li>■ Foam causes capacity change and is recognized</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process temperature -50 to +150°C/-58 to +302°F</li> <li>■ Ambient temperature -50 to +70°C/-58 to +158°F</li> <li>■ Process pressure -1 to 64bar/-14.5 to 928psi</li> <li>■ Medium properties –</li> <li>■ Sensor length ≤ 3,000mm/≤ 118"</li> <li>■ Process connection Thread, hygiene</li> <li>■ Supply/Communication AC-2-wire, 8/16mA HART, IO-Link, DC-PNP, 3-wire, relay, NAMUR, PFM</li> <li>■ Approvals Regional Ex approvals, hygiene approvals, WHG, SIL</li> </ul>	<ul style="list-style-type: none"> <li>■ Process temperature -80 to +200°C/-112 to +392°F</li> <li>■ Process pressure -1 to 100bar/-14.5 to 1,450psi</li> <li>■ Medium properties –</li> <li>■ Sensor length 100 to 10,000mm/3.9 to 394"</li> <li>■ Process connection Thread, hygiene</li> <li>■ Supply/Communication AC-2-wire, DC-PNP 3-wire, 3-wire 3 to 12V, relay, 8/16mA, NAMUR</li> <li>■ Approvals Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL</li> </ul>
<b>Application limit</b>	<ul style="list-style-type: none"> <li>■ For viscous media, see capacitance with build-up compensation</li> <li>■ Standard instruments do not recognize foam as a liquid</li> <li>■ Gas bubbles in pipes</li> </ul>	<ul style="list-style-type: none"> <li>■ Condensate formation in nozzle – select inactive length</li> <li>■ DC &lt; 1.6</li> </ul>

**✓ Hygiene application**  
(e.g. production of foods or pharmaceuticals)

- Surface finish
- Approvals (EHEDG, 3-A)
- FDA conforming materials
- Capable of CIP and SIP
- Hygiene process connections



B

**Conductive**  
**Liquipoint FTW33**



- Truly flush mounted installation
- Continuous functionality through changing media
- Reliable point level detection even with build-up

-20 to +100°C/-4 to +212°F  
(+150°C/+302°F for 1 h)  
-40 to +70°C/-40 to +158°F  
-1 to +25bar/-14.5 to +362.5psi  
1µS/cm to 100mS/cm

Thread, hygiene  
DC-PNP, IO-Link

Hygiene approvals

- Non-conductive media
- Dry, non-conductive build-up

**Capacitance/Conductive**  
**Liquipoint FTW23**



- CIP and SIP cleanability up to protection class IP 69
- No individual adjustment to each medium necessary
- LED display for on-site function check



-20 to +100°C/-4 to +212°F  
(+135°C/+275°F for 1 h)  
-40 to +70°C/-40 to +158°F  
-1 to +16bar/-14.5 to +232psi  
DC value > 20

Thread, hygiene  
DC-PNP

Hygiene approvals

- Water-/alcohol-based media
- Build-up

## 4. Instrument selection within the measuring principle

	<p style="text-align: center;"><b>Liquiphant</b> FTL50H/51H, FTL63</p> 	<p style="text-align: center;"><b>Liquiphant</b> FTL51B, FTL50/51</p> 
<p><b>Applications</b></p>	<ul style="list-style-type: none"> <li>■ Point level switch for hygiene applications including all required approvals and process connections</li> </ul>	<ul style="list-style-type: none"> <li>■ Universal standard modular system including all required approvals, process connections and electrical connections</li> <li>■ Digital, safe and easy to use</li> </ul>
<p><b>Special features</b></p>	<ul style="list-style-type: none"> <li>■ Density adaptation</li> <li>■ Polished sensor surfaces</li> <li>■ Sensor materials FDA conform</li> <li>■ Heartbeat Technology</li> <li>■ Bluetooth operation and maintenance with the SmartBlue App/DTM</li> <li>■ Recurring test by push button</li> </ul>	<ul style="list-style-type: none"> <li>■ Density adaptation</li> <li>■ Heartbeat Technology</li> <li>■ Bluetooth operation and maintenance with the SmartBlue App/DTM</li> <li>■ Recurring test by push button</li> </ul>
<p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>■ Process pressure</li> <li>■ Process temperature</li> <li>■ Process connection</li> <li>■ Ambient temperature</li> <li>■ Sensor material</li> <li>■ Surface finish</li> <li>■ Electrical connection</li> <li>■ Approvals</li> <li>■ Design</li> </ul>	<p>-1 to 64bar/-14.5 to 928psi -50 to +150°C/-58 to +302°F Thread, flange, hygiene -50 to +70°C/-58 to +158°F</p> <p>316L</p> <p>&lt; 1.5µm, &lt; 0.3µm, &lt; 0.38µm electro-polished</p> <p>AC-2-wire, 8/16mA HART, DC-PNP 3-wire, relay, PROFIBUS®, NAMUR, PFM</p> <p>Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL</p> <p>Compact and with tube extension</p>	<p>-1 to 100bar/-14.5 to 1450psi -50 to +150°C/-58 to +302°F Thread, flange -60 to +70°C/-76 to +158°F</p> <p>316L, Alloy C22</p> <p>&lt; 3.2µm</p> <p>AC-2-wire, 8/16mA HART, DC-PNP 3-wire, relay, PROFIBUS®, NAMUR, PFM</p> <p>Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL</p> <p>Compact and with tube extension</p>

## Vibronic

Most universal liquid limit switch

- Unaffected by media
- Ready for use without calibration
- Self-monitoring for build-up and corrosion
- May be used in turbulent and effervesce liquids

Continued on page 30

### Liquiphant FTL62/FTL51C



- Modular system for aggressive media, e.g. chemicals
- Numerous coatings

- Density adaptation
- Heartbeat Technology
- Bluetooth operation and maintenance with the SmartBlue App/DTM
- Recurring test by push button

-1 to 40bar/-14.5 to 580psi  
-50 to +150°C/-58 to +302°F  
Flange  
-60 bis +70°C/-76 to +158°F

316L/10487; coating: ECTFE, PFA,  
Email  
—

AC-2-wire, DC-PNP 3-wire,  
8/16mA HART, Relais,  
PROFIBUS®, NAMUR, PFM  
Regional Ex approvals, hygiene  
approvals, WHG, marine approvals,  
SIL  
Compact and with tube extension

### Liquiphant FTL64, FTL70/71



- For high temperatures and high pressures, e.g. in the petrochemical and chemical industry, power plants

- Sensor materials designed for high temperatures
- Gastight process seal
- Heartbeat Technology
- Bluetooth operation and maintenance with the SmartBlue App/DTM

-1 to 100bar/-14.5 to 1,450psi  
-60 to +280°C/-76 to +536°F  
Thread, flange  
-60 bis +70°C/-76 to +158°F

Duplex 316/318L, Alloy C22,  
optional with coating (PFA)  
< 3.2µm

AC-2-wire, 8/16mA HART, DC-PNP  
3-wire, relay, PROFIBUS®, NAMUR,  
PFM  
Regional Ex approvals, WHG, marine  
approvals, SIL

Compact and with tube extension

### Liquiphant FTL80/81, FTL85



- For high degree of failure safety: Safety Integrity Level up to SIL3 e.g. in the petrochemical and chemical industry, oil & gas

- Redundant sensor design in one instrument
- Integrated self-testing every 3 seconds
- Proof test interval may be extended up to 12 years
- Gastight process seal (Second Line of Defense)

-1 to 100bar/-14.5 to 1,450psi  
-60 to +280°C/-76 to +536°F  
Thread, flange  
-60 bis +70°C/-76 to +158°F

316L, 318L, Alloy C22, coating:  
Emaile, PFA, ECTFE, PFA conductive  
< 3.2µm

4 to 20mA, optional with separate  
switching unit




Regional Ex approvals, WHG, marine  
approvals, SIL, VdTÜV100

Compact and with tube extension


## 4. Instrument selection within the measuring principle

## Vibronic

Continued from page 29

	Liquiphant FTL33	Liquiphant FTL31	Liquiphant FTL41
			
<b>Applications</b>	<ul style="list-style-type: none"> <li>■ Food applications, e.g. dairies or breweries</li> <li>■ Compact sensor</li> <li>■ Suitable for tight installation conditions with skid builders</li> </ul>	<ul style="list-style-type: none"> <li>■ Compact sensor</li> <li>■ Suitable for installation even in confined conditions, especially in the machinery industry</li> </ul>	<ul style="list-style-type: none"> <li>■ Universeller standard level switch for basic requirements</li> <li>■ Pipe extension up to 2 m/6.6ft</li> </ul>
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ Gap-free housing design</li> <li>■ External performance test possible</li> </ul>	<ul style="list-style-type: none"> <li>■ External performance test possible</li> </ul>	<ul style="list-style-type: none"> <li>■ Simple to use with plug and play functionality based on active sensor technology</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process pressure</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure</li> </ul>
	<ul style="list-style-type: none"> <li>■ Process temperature</li> <li>■ Process connection</li> <li>■ Ambient temperature</li> <li>■ Sensor material</li> <li>■ Surface finish</li> <li>■ Electrical connection</li> <li>■ Approvals</li> </ul>	<ul style="list-style-type: none"> <li>■ Process temperature</li> <li>■ Process connection</li> <li>■ Ambient temperature</li> <li>■ Sensor material</li> <li>■ Surface finish</li> <li>■ Electrical connection</li> <li>■ Approvals</li> </ul>	<ul style="list-style-type: none"> <li>■ Process temperature</li> <li>■ Process connection</li> <li>■ Ambient temperature</li> <li>■ Sensor material</li> <li>■ Surface finish</li> <li>■ Electrical connection</li> <li>■ Approvals</li> </ul>
	<ul style="list-style-type: none"> <li>■ Design</li> </ul>		
	<ul style="list-style-type: none"> <li>-1 to 40bar/ -14.5 to 580psi</li> <li>-40 to +150°C/ -40 to +302°F</li> <li>Thread, hygiene</li> <li>-40 to +70°C/ -40 to +158°F</li> <li>316L</li> <li>&lt; 1.5µm, &lt; 0.76 µm</li> <li>AC-2-wire, DC-PNP 3-wire</li> <li>Hygiene approvals</li> <li>Compact and short tube version</li> </ul>	<ul style="list-style-type: none"> <li>-1 to 40bar/ -14.5 to 580psi</li> <li>-40 to +150°C/ -40 to +302°F</li> <li>Thread</li> <li>-40 to +70°C/ -40 to +158°F</li> <li>316L</li> <li>&lt; 3.2 µm</li> <li>AC-2-wire, DC-PNP 3-wire</li> <li>WHG, marine approvals</li> <li>Compact and short tube version</li> </ul>	<ul style="list-style-type: none"> <li>-1 to 40bar/ -14.5 to 580psi</li> <li>-40 to +150°C/ -40 to +302°F</li> <li>Thread, flange</li> <li>-40 to +70°C/ -40 to +158°F</li> <li>316L</li> <li>&lt; 3.2 µm</li> <li>DC-PNP 3-wire, relay, NAMUR</li> <li>Regional Ex approvals, WHG</li> <li>Compact and with tube extension</li> </ul>

## Vibronic installation instructions

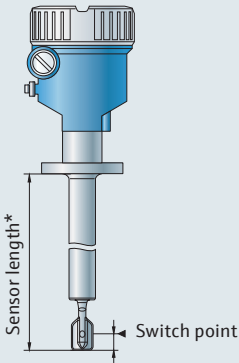

### Determine switch point

The sensors of the Liquiphant family have a switch point exact to the millimeter-under reference conditions (density  $1\text{g/cm}^3$ ,  $23^\circ\text{C}$ , pe Obar).

### Define length of sensor


For the optimum adaptation to tanks and pipes the instruments are produced in different lengths. Length details always refer to the distance between the sealing face and the tip of the fork.

\*Sensor length:

- Compact design between 55mm...69mm/2.2"...2.7"  
(depending on process connection)
- Tube extension 118mm/4.6"; 148mm...6,000mm/5.8"...236"

### Variable switch point

For applications which do not permit the determination of the switch point during planning, the same may be subsequently adjusted via a sliding sleeve.




### Optimum installation

Align tuning fork in such a way that the narrow sides of the tines point upwards and downwards allowing the liquid to drip freely (also applicable to higher viscous media). Sufficient free space should be provided for assembly, connections and setting.

### Build-up on the tank wall

Provide sufficient space between the expected product build-up on the tank wall and the tuning fork.



### Installation involving low viscosity (up to $2,000\text{mm}^2/\text{sec.}$ )

Deburr nozzle

### Installation in pipes starting 2"


Flow rates up to  $5\text{m}^3/\text{s}$  with a viscosity of  $1\text{mm}^2/\text{sec.}$  and a density of  $1\text{g/cm}^3$ . In different conditions the function must be tested.

### Dynamic load

In case of strong dynamic loads, support instruments with tube extension by appropriate measures.

### Installation in insulated tanks



A spacer is recommended for higher temperatures. This avoids breaking the tank insulation and protects the electronic insert from higher temperatures. In addition, a pressure-proof feedthrough is included which keeps the tank pressure off the housing up to 64bar/928psi in case of sensor damage.



## 4. Instrument selection within the measuring principle


### Capacitance

- Tried and tested in operation, robust and safe
- Simple commissioning
- Versatile
- Reliable function independent of build-up

	<b>Liquicap M</b> <b>FTI51/52</b> 	<b>Liquipoint</b> <b>FTW23</b> 
<b>Applications</b>	<ul style="list-style-type: none"> <li>■ Universal switch without block distance</li> <li>■ Process tanks</li> <li>■ Suitable for extreme process conditions</li> </ul>	<ul style="list-style-type: none"> <li>■ Pipes with small diameters</li> <li>■ Small vessels</li> </ul>
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ Build-up compensation</li> <li>■ Gastight process seal</li> <li>■ Foam causes capacity change and is recognized</li> <li>■ Plug and play functionality</li> </ul>	<ul style="list-style-type: none"> <li>■ CIP and SIP cleanability ensured - up to protection class IP 69</li> <li>■ Individual adjustment to each medium not necessary</li> <li>■ LED display for on-site function check</li> </ul>
<b>Technical data</b> <ul style="list-style-type: none"> <li>■ Process pressure</li> <li>■ Process temperature</li> <li>■ Process connection</li> <li>■ Ambient temperature</li> <li>■ Sensor material</li> <li>■ Surface finish</li> <li>■ Electrical connection</li> <li>■ Approvals</li> <li>■ Design</li> </ul>	<p>-1 to 100bar/-14.5 to 1,450psi -80 to +200°C/-112 to +392°F</p> <p>Thread, flange, hygiene -50 to +120°C/-58 to +248°F PTFE, PFA, FEP, 316L</p> <p>—</p> <p>AC-2-wire, DC-PNP 3-wire, 3-wire 3 to 12V, relay, 8/16 mA, NAMUR Regional Ex approvals, hygiene approvals, WHG, marine approvals, SIL Rod, rope design</p>	<p>-1 to +16bar/-14.5 to +232psi -20 to +100°C/-4 to +212°F (+135°C/+275°F for 1 h)</p> <p>Thread, hygiene -40 to +70°C/-40 to +158°F Sensor: 316L Sensor isolation: PEEK</p> <p>—</p> <p>DC PNP, IO-Link</p> <p>Hygiene approvals</p> <p>Compact</p>



## Capacitance installation instructions



### Determine switch point

In point level detection, the minimum capacity change should amount to  $\Delta C_{\min} = 5$  to  $10\text{pF}$

### Define sensor length

In order to obtain optimum adaptation to tanks and pipes the instruments are produced in custom-made lengths. Length details always refer to the distance between the sealing face and the end of the probe.

- Rod 100 to 4,000mm/3.9 to 158"
- Rope 420 to 10,000mm/16.5 to 394"

### Rule of thumb for minimum probe length

Non-conductive media  $L_{\min} = \Delta C_{\min} / (C_s \cdot (\epsilon_r - 1))$

$C_s$  = Probe capacity, see technical information

### Installation recommendations

Rod probes should be installed horizontally only up to a length of 1m. An inclined  $\alpha$  installation angle supports dripping of higher viscous media.

Non-conductive media – estimate with rule of thumb

Conductive media ( $> 100\mu\text{S/cm}$ ) – no special attention to anything




## Probe selection

Without ground tube	<ul style="list-style-type: none"> <li>■ For conductive liquids</li> <li>■ For highly viscous liquids</li> </ul>	
With ground tube	<ul style="list-style-type: none"> <li>■ For non-conductive liquids</li> <li>■ For plastic tanks</li> <li>■ For agitator vessels</li> </ul>	
Inactive length	<ul style="list-style-type: none"> <li>■ Installation in assembly nozzles</li> <li>■ In case of condensate formation on tank ceiling</li> </ul>	
Fully insulated inactive length, with plated flange	<ul style="list-style-type: none"> <li>■ Particularly suited to aggressive liquids</li> </ul>	
Active build-up compensation	<ul style="list-style-type: none"> <li>■ In case of strong (conductive) build-up formation on the probe</li> </ul>	
Gastight feedthrough	<ul style="list-style-type: none"> <li>■ For LPG tanks</li> <li>■ Against condensate formation in the probe in extreme temperature conditions</li> <li>■ For toxic media</li> </ul>	
Separate housing	<ul style="list-style-type: none"> <li>■ For high environmental temperature</li> <li>■ If limited space is required</li> </ul>	


## 4. Instrument selection within the measuring principle

### Conductive

- Multipoint detection with one process connection
- Price-effective instrumentation

	<b>Liquipoint T</b> FTW31/ FTW32 	<b>Liquipoint</b> FTW33 	<b>Konduktiv</b> <b>Einstabsonde</b> 11961Z 
<b>Application</b>	<ul style="list-style-type: none"> <li>■ Multipoint control</li> <li>■ Water-, waste water application</li> <li>■ Two-point control</li> <li>■ Metal or plastic tanks</li> </ul>	<ul style="list-style-type: none"> <li>■ Pipes with small diameters</li> <li>■ Small vessels</li> <li>■ Pasty media</li> </ul>	<ul style="list-style-type: none"> <li>■ Process or storage tanks</li> <li>■ Pump protection</li> <li>■ Overflow prevention</li> <li>■ Two-point control</li> <li>■ For high pressure or vacuum</li> </ul>
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ 2/3/5 rods or ropes</li> <li>■ Separate design with Nivotester FTW325</li> <li>■ Line monitoring</li> <li>■ Simple probe adjustment</li> </ul>	<ul style="list-style-type: none"> <li>■ Truly flush mounted installation</li> <li>■ Continuous functionality through changing media</li> <li>■ Reliable point level detection even with build-up</li> <li>■ Capable of CIP and SIP</li> <li>■ Conductive foam can be detected or hidden</li> </ul>	<ul style="list-style-type: none"> <li>■ Corrosion-resistant materials</li> <li>■ Ceramic insulation</li> <li>■ Simple probe adjustment</li> </ul>
<b>Technical data</b> <ul style="list-style-type: none"> <li>■ Process pressure</li> <li>■ Process temperature</li> <li>■ Process connection</li> <li>■ Ambient temperature</li> <li>■ Sensor material</li> </ul>	-1 to 10bar/ -14.5 to 145psi -40 to +100°C/ -40 to +212°F  Thread -40 to +70°C/ -40 to +158°F Rod: 316L, PP insulated Rope: 316Ti, FEP insulated	-1 to +25bar/ -14.5 to +362.5psi -20 to +100°C/ -4 to +212°F (+150°C/+302°F for 1 h) Thread, hygiene -40 to +70°C/ -40 to +158°F Sensor: 316L Isolation: PEEK	-1 to +160bar/ -15 to +2,320psi -200 to +250°C/ -328 to 482°F  Thread -200 to +250°C/ -328 to 482°F Ceramic, 316Ti
<ul style="list-style-type: none"> <li>■ Electrical connection</li> <li>■ Approvals</li> <li>■ Design</li> </ul>	AC, DC (relay), NAMUR, switching unit (relay) WHG, leakage, ATEX G 2, 3 and 5 rod probes or rope design	DC PNP, IO-Link  Hygiene approvals Compact	—  ATEX, WHG

## Conductive installation instructions

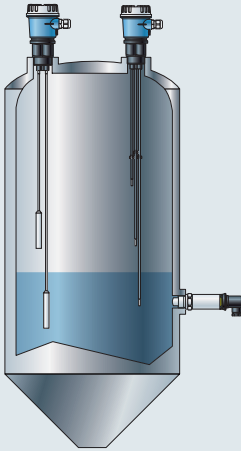

### Min. or max. detection

Rod and rope probes may be used both for min. and max. detection.




- Switch point exact to the millimeter
- Subsequent adjustment of rods or ropes for switch point setting

### Installation

- Tank of plastics or metal
- 1 rod and 2 rod probes in pipes
- Rod probes may be installed from the top, the side or the bottom. Rope probes are only installed from the top.
- In lateral installation:
  - The sensor should be installed as inclined as possible (10-30°)
  - The sensor should not be installed in the intake flow

### Rope probe

- Install the probe as much in the center as possible so that the liquid cannot move the weight to the wall



## 4. Instrument selection within the measuring principle

### Float switch

- Favourable measuring principle
- Controllers as initiators, microswitches
- Connection cable for different media
- Also Ex area applications

C

Liquifloat  
FTS20



#### Application

- Level monitoring in tanks
- Pump control

#### Special features

- Cost-effective instrumentation

#### Technical data


- Process pressure
- Process temperature

Max. 3bar/43.5psi  
 PVC cable: 5°C to +70°C/41 to +158°F  
 PUR cable: -20°C to +85°C/-4 to +185°F  
 CSM cable: -20°C to +85°C/-4 to +185°F

- Process connection
- Ambient temp.
- Sensor material
- Roughness
- Electrical connection
- Approvals
- Design

Cable entry  
 See process temperature  
 Shell of PP  
 –  
 AC/DC 3-wire, NAMUR  
 ATEX  
 Cable and float

## Float switch instructions



### Determine switch point

To determine the switch point the cable length must be reduced as follows.

Minimum length of cable between attachment point and float:

- PVC  $\geq 50\text{mm}/2''$
- PUR  $\geq 100\text{mm}/3.9''$
- CSM  $\geq 100\text{mm}/3.9''$

In top installation, the length of the weight must be taken into consideration (190mm/7.5").

- Upper switch point  $+25^\circ \pm 10^\circ / +77^\circ$
- Lower switch point  $+14^\circ \pm 10^\circ / +57^\circ$   
measured against the horizontal line

### Define sensor length

The cable may be adjusted according to customer requirement.

### Optimum installation

The float switch may be externally fastened with bolts – through a G1A threaded hole. Use the weight in top installation.

- Note: The center of rotation should always be horizontal. If the weight is used, an additional traction relief (e.g. a knot in the cable) has to be provided behind the packing box screwed connection on the outside of the tank.


### Medium compatibility

- PVC: For water and slightly aggressive liquids
  - PUR: Preferred for fuel, heating oils and oil-containing media
  - CSM: For many acids and lyes
- Medium compatibility must be especially tested.



# Point level detection in bulk solids

## Selection and engineering guide

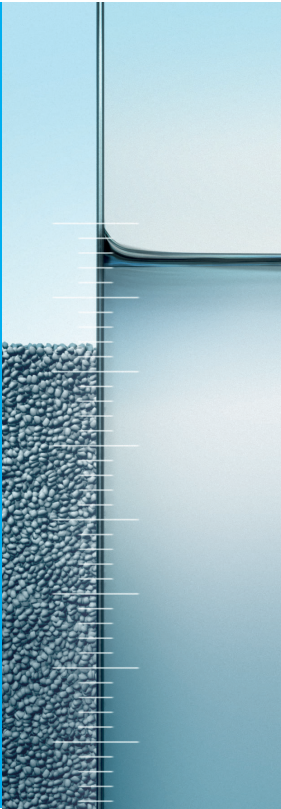

## Step by step

# A

### Overview of measuring principles

The first pages contain an overview of measuring principles for point level detection of Endress+Hauser in diagrams. Subsequently, the mode of operation of the measuring principle and the respective product family are introduced.

### Checklist

You should know the specific requirements of your application for the selection of a suitable point level switch. The checklist provides an overview and is supposed to assist you in acquiring this data and taking it as completely as possible into consideration.

# B

### Selection of the measuring principle

The suitable measuring principle is selected according to two criteria:

- application and
- process requirements.

First, the measuring principles are listed in accordance with specific plant criteria (vessel, conveyor belt, etc.) and then in accordance with specific medium criteria (high temperatures, aggressiveness, etc.)

Select the measuring principle which meets, if possible, all of the criteria demanded by you or your plant. The measuring principles are listed from left to right according to their suitability. The ideal measuring principle is listed first and edged in blue.

# C

### Selection of the instrument

You now move to the area of the selected measuring principle where you can choose the suitable instrument of a product family. Compare your application and process data with the instrument data.

### Engineering

After the selection of the optimum instrument please check the installation instructions at the end of the respective measuring principle. You will find basic guidelines supporting safe instrument installation and application.



Contents

1. Overview of measuring principles .....	<b>42</b>
2. Checklist .....	<b>47</b>
3.1 Selection of measuring principle according to application .....	<b>48</b>
▪ Silo / tank / bin / blow tank .....	48
▪ Conveyor belts .....	50
▪ Filling nozzle / loader .....	51
3.2 Selection of measuring principle according to process requirements .....	<b>52</b>
▪ Hygiene applications .....	52
▪ High process temperatures .....	53
▪ Aggressive / abrasive media .....	54
▪ Lumpy media .....	56
▪ Dusty / fluidizing / fine-grained media .....	58
▪ Build-up forming / hygroscopic / tacky media .....	59
▪ Detection of solids under water .....	60
4. Instrument selection within the measuring principle/ installation instructions .....	<b>61</b>
▪ Capacitance: Nivector, Minicap, Solicap .....	61
▪ Vibronik: Soliphant .....	64
▪ Paddle: Soliswitch .....	66
▪ Microwave barrier: Soliwave .....	68
▪ Bulk solids movement detection: Solimotion .....	70
▪ Radiometry: The radiometric measuring principle is not considered in this section. Please contact our application consultants in your country for detailed information.	

A


B

C

## 1. Overview of measuring principles

A

Segmentierung		
	Point level	Continuous
Liquids	Vibronic Conductive Capacitance Float switch Radiometric	Radar Guided radar Ultrasonic Hydrostatic Capacitance Radiometric
Bulk solids	Vibronic Capacitance Paddle Microwave Radiometric	Radar Guided radar Ultrasonic Electromechanical system Radiometric

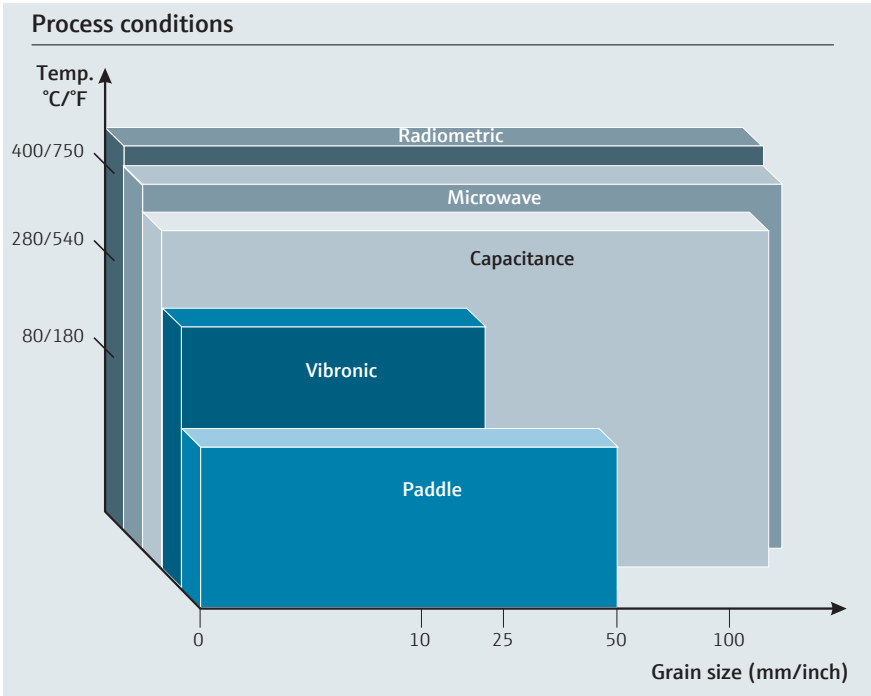


### Flexible answers to individual needs.

The basic idea of the FLEX structure is that depending on the application, there are different goals to achieve and different challenges to overcome. Some processes you must just monitor, others you want to optimize. Here is a overview of our selections:

<p><b>Xpert</b> Selection</p>	<p>Master your most challenging applications</p>	<ul style="list-style-type: none"> <li>■ Specialized products</li> <li>■ Designed for demanding applications</li> </ul>	<p>F L E X</p>
<p><b>Extended</b> Selection</p>	<p>Optimize your processes with innovative technologies</p>	<ul style="list-style-type: none"> <li>■ High-end products</li> <li>■ Highly functional and convenient</li> </ul>	<p>F L E X</p>
<p><b>Lean</b> Selection</p>	<p>Handle your core processes easily</p>	<ul style="list-style-type: none"> <li>■ Standard products</li> <li>■ Reliable, robust and low-maintenance</li> </ul>	<p>F L E X</p>
<p><b>Fundamental</b> Selection</p>	<p>Meet your basic measurement needs</p>	<ul style="list-style-type: none"> <li>■ Simple products</li> <li>■ Easy to select, install and operate</li> </ul>	<p>F L E X</p>

## 1. Overview of measuring principles

## Contact measuring principles

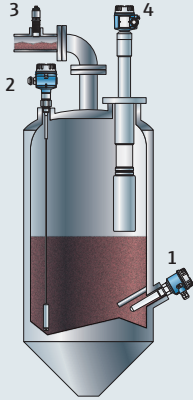**Capacitance**

A capacitance probe may be compared to an electric condenser. As the tank is filled, the probe capacity increases. This change is electrically analyzed.

**Minicap (1)**

Favorable limit switch, particularly for build-up forming media.

**Solicap M (2)**

Robust probe for coarse-grained media.

**Nivector (3)**

Most compact limit switch for bulk solids.


**Solicap S (4)**

For extremely high temperatures.

Process temperatures up to +400°C/+750°F

Process pressures up to 25bar/360psi

Dielectric constant DC min. 1.6

**Paddle**


The rotation of the paddle is stopped as it is covered by solids. This actuates a relay.

**Soliswitch**

Favorable limit switch for simple applications with fine-grained bulk solids.

Process temperatures up to +80°C/+180°F

Process pressures up to 1.8bar/26psi

**Vibronic**

A one-rod sensor or a tuning fork is excited at its resonant frequency. The drive works piezoelectrically. The amplitude changes as the fork enters the medium. The change is analyzed and translated into a switching signal.

**Soliphant**


Universal limit switch for bulk solids, also if media change.

Process temperatures up to +280°C/+540°F

Process pressures up to 25bar/360psi


Medium density min. 10g/l

## Non-contact measuring principles



### Microwave

- **Microwave barrier:** Detection of all kinds of bulk solids is based on microwaves (transmitter-receiver principle).
- **Flow indicator for bulk solids:** Detection of bulk solids movement (present / not present) is based on microwaves (Doppler effect).



Inspection glasses have to be installed in case of metallic container walls. Installation in contact with the process is also possible.


### Soliwave

- Point level detection
- Combined point level detection and bulk flow monitoring
- For the purpose of monitoring and counting
- Detection of build-up, contamination or similar items

### Solimotion

- Monitoring of pneumatic and mechanic transport processes
- Change of mass flow

For any process temperature or +450°C/+842°F (in case of direct installation with high-temperature adapter) for any process pressure or 21bar/350psi abs. (in case of direct installation with high pressure adapter).



### Radiometric

The gamma source, a cesium or cobalt isotope, emits radiation which is attenuated as it passes through materials. The measuring effect results from the absorption of radiation by the product as the level changes. The measuring system consists of a source and a detector as a receiver.

### Gammapilot

Non-contact measurement from outside, for all extreme applications, e.g. very abrasive, corrosive and aggressive media. Typical applications: Point level detection in pulp digesters, wood chip silos and fluidized bed reactors or in density and mass flow measurement.

- Unaffected by media
- Any process temperature
- Any process pressure
- Unaffected by gammagraphy (FHG65)

For more detailed information, please contact our application consultant in your country or use the Applicator selection software.

## 2. Checklist

You need to know your specific application requirements for a correct selection. The checklist opposite provides an overview of relevant process data and is supposed to help you to take these into consideration. If we have not included all of the data, please supplement this list with your criteria.

The checklist is used both for the selection of the measuring principle and the selection of the instrument.



### TIP

Copy this checklist and complete it to have all relevant data readily available for the selection.




### The most important terms/abbreviations

ATEX	AT= Atmosphere, EX = Explosive. Abbreviation of the French working title of the EU Guideline 94/9/EC
WHG	Wasserhaushaltsgesetz. Overflow prevention/leakage alarms are certified according to WHG
SIL	Safety Integrity Level. Safety levels according to IEC 61508/61511
VdTÜV100	Liquefied gas approval
<b>Electronics</b>	
IO-Link	Communication system for connecting intelligent sensors and actuators to an automation system
3-wire	Connection for Endress+Hauser switching unit
AC	Connection for alternating voltage
DC-PNP	Connection for direct voltage with transistor output (open collector)
Relay + DPDT	Double Pole Double Throw; relay as double change-over contact
PFM	PulseFrequencyModulation; extremely interference-proof signal transmission between sensor electronics and switching unit
NAMUR	Direct current interface for sensors and switching amplifiers (IEC 60947-5-6)
PROFIBUS®	Fieldbus technology PROFIBUS PA
HART®	Fieldbus technology
FF	FOUNDATION™ fieldbus
<b>Instrumentation</b>	
Compact	Signal output is directly available from probe electronics (e.g. DC-PNP, relay SPST)
Separate instrument.	Signal output is available via an additional switching unit (top-hat rail or 19" card) (e.g. relay SPDT). The switching unit also supplies the sensor with power
<b>Certification</b>	
EHEDG	„European Hygienic Equipment Design Group“. An independent group with different subgroups which discuss special subjects concerning hygiene requirements and prepare their publication
3-A	„3-A Sanitary Standards“ are voluntary norms of the American „International Association of Milk, Food and Environmental Sanitarian“
FDA	„Food and Drug Administration“. American approval authority. Materials, special plastics are subject to respective guidelines for their use in pharmaceutical/food plants
3.1	Material test certificate for special steels
NACE	„National Association of Corrosion Engineering“. Material test certificate for special steels including degree of hardness and cooling/annealing temperature of steel

		Please complete		Notes
Medium	Density	g/l (kg/cm <sup>3</sup> )		
	Grain size	mm		
	Dielectric constant (DC)			
	Tacky/build-up forming	yes	no	
	Dusty	yes	no	
	Abrasive	yes	no	
	Aggressive	yes	no	
	Easily flowing	yes	no	
Non-contact measurement	Hygroscopic	yes	no	
		yes	no	
Process data	Pressurized process	min.	max.	
	Temperature at housing	min.	max.	
	Temperature in process	min.	max.	
	max. lateral load		max.	
	max. rope tensile load		max.	
Process connection	Threaded connection	yes	no	
	Flange	yes	no	
	Size	Ø		
	Pressure requirements	min.	max.	
	Hygiene requirements	yes	no	
Installation	Tank	yes	no	
	Orientation	lateral	from the top	
	Pipe/conveyor belt	yes	no	
	Point level detection	min.	max.	
	Control	min.	max.	
Electric connection	DC, AC, relay, bus systems, PFM, NAMUR, 8/16 mA			
Surface requirements	Surface finish	µm		
	Roughness	yes	no	
Approvals	Ex (dust)	yes	no	
	Ex (gas)	yes	no	
	WHG	yes	no	
	Ship building	yes	no	
	EHEDG	yes	no	
	3-A	yes	no	
Certificates/ manufacturer declarations	3.1	yes	no	
	FDA listed materials	yes	no	
	SIL	yes	no	
	EG1935	yes	no	
Special requirements	Extreme external vibration	yes	no	

### 3.1 Selection of measuring principle according to application


B

	Our proposal <b>Vibronic Soliphant M/T</b>	<b>Capacitance Solicap S/M Minicap/Nivector</b>	<b>Paddle Soliswitch</b>
			
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Build-up and abrasion monitoring</li> <li>■ Independent of medium</li> <li>■ Unaffected by abrasion</li> <li>■ Maintenance-free</li> <li>■ Easy commissioning</li> <li>■ Also rod and rope versions</li> </ul>	<ul style="list-style-type: none"> <li>■ Up to 400°C/750°F</li> <li>■ Unaffected by build-up</li> <li>■ Robust probe</li> <li>■ Easy commissioning</li> <li>■ Active build-up compensation</li> </ul>	<ul style="list-style-type: none"> <li>■ Price-effective sensor</li> <li>■ Easy commissioning and handling</li> <li>■ Also rod and rope versions</li> <li>■ Rotation monitoring</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process pressure -1 to 25bar/-14 to 360psi</li> <li>■ Process temperature -50 to +280°C/ -55 to +540°F</li> <li>■ Grain size Up to 25mm/1"</li> <li>■ Density Starting 10g/l</li> <li>■ Measuring range 145 to 20,000mm/6 to 800"</li> <li>■ Approvals Regional Ex approvals, SIL</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure -1 to 25bar/-14 to 360psi</li> <li>■ Process temperature -50 to +400°C/ -60 to +750°F</li> <li>■ Grain size Up to 100mm/4"</li> <li>■ Density —</li> <li>■ Measuring range 30 to 20,000mm/1 to 800"</li> <li>■ Approvals Regional Ex approvals, SIL</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure -0.5 to 1.8bar/-7 to 26psi</li> <li>■ Process temperature -20 to +80°C/ -4 to +180°F</li> <li>■ Grain size Up to 50mm/2"</li> <li>■ Density Starting 100g/l</li> <li>■ Measuring range 75 to 2,000mm/3 to 80"</li> <li>■ Approvals ATEX</li> </ul>
<b>Application limits</b>	<ul style="list-style-type: none"> <li>■ For media &gt; 25mm/1" Ø or process temperature &gt; 280°C/540°F see capacitance probes</li> </ul>	<ul style="list-style-type: none"> <li>■ See vibronic for a DC value &lt; 1.6</li> <li>■ For media &gt; 100mm/4" Ø see microwave barrier</li> </ul>	<ul style="list-style-type: none"> <li>■ For process temperatures &lt; 80°C/180°F and media &gt; 50mm/2" Ø see capacitance probes</li> </ul>




**✓ Silo / tank / bin / blow tank**

- Changing media
- Alarm for empty and full tank
- Sensor installation from the top or laterally
- Static charging if a high portion of fine particles is present



B

**Microwave  
Soliwave**



**Radiometric  
GammapiLOT**



- Non-contact from outside in plastic or metal tanks with windows penetrable by microwaves
- Detection of build-up, contamination or similar matter
- Front-flush solutions
- Easy assembly
- Combined point level detection and bulk flow monitoring possible

- Non-contact from outside
- Exact measurement under extreme conditions
- Monitoring of build-up formation

0.5 to 6.8bar/7.2 to 98psi abs.  
 (+21bar/+305psi with HD-Adapter)  
 -40 to +70°C/-40 to +158°F  
 (+450°C/+842°F with HT-Adapter)  
 As required  
 Starting 10g/l  
 30 to 100,000mm/1 to 4,000"  
 Regional Ex approvals

As required

As required

As required

As required

As required

Regional Ex approvals, SIL

- See capacitance in case of build-up with highly conductive media
- See capacitance in case of very low attenuation


- Observe radiation protection provisions
- Further information from our sales team
- Applicator for configuring the measuring point

### 3.1 Selection of measuring principle according to application

B

#### ✓ Conveyor belts

- Material flow detection / counter for packaged goods
- Monitoring of belt feed points, chutes
- Strong abrasion (non-contact)
- Fast reaction




#### Our proposal

	Microwave Soliwave	Microwave Solimotion	Capacitance Solicap M
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Non-invasive</li> <li>■ Counting of packaged goods possible</li> <li>■ Combined point level detection and bulk flow monitoring possible</li> </ul>	<ul style="list-style-type: none"> <li>■ Non-invasive monitoring of pneumatic and mechanic transport processes</li> <li>■ Change of mass flow</li> </ul>	<ul style="list-style-type: none"> <li>■ Very robust</li> <li>■ Tensile loads up to 60kN</li> <li>■ Abrasion resistant</li> <li>■ Active condensate build-up</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process temperature: -40 to +70°C/-40 to +158°F (+450°C/+842°F with HT-Adapter)</li> <li>■ Grain size: As required</li> <li>■ Measuring range: 30 to 100,000mm/ 1 to 4,000"</li> <li>■ Sensor material: Aluminum or 316Ti, PTFE or ceramic</li> <li>■ Direction of inst.: Laterally</li> <li>■ Approvals: Regional Ex approvals</li> </ul>	<ul style="list-style-type: none"> <li>■ Process temperature: -40 to +70°C/-40 to +158°F (+450°C/+842°F with HT-Adapter)</li> <li>■ Grain size: As required</li> <li>■ Measuring range: 30 bis 20,000mm/ 1 to 800"</li> <li>■ Sensor material: Aluminium or 316L, PTFE</li> <li>■ Direction of inst.: From the side or the top</li> <li>■ Approvals: Regional Ex approvals</li> </ul>	<ul style="list-style-type: none"> <li>■ Process temperature: -50 to +180°C/ -60 to +350°F</li> <li>■ Grain size: Up to 100mm/4"</li> <li>■ Measuring range: 200 to 20,000mm/ 8 to 800"</li> <li>■ Sensor material: Steel, 316L, PTFE</li> <li>■ Direction of inst.: From the top</li> <li>■ Approvals: Regional Ex approvals, SIL</li> </ul>
<b>Application limits</b>	<ul style="list-style-type: none"> <li>■ See capacitance in case of build-up with highly conductive media</li> <li>■ See capacitance in case of very low attenuation</li> </ul>	<ul style="list-style-type: none"> <li>■ In case of build-up with highly conductive media</li> <li>■ For very low solids flow speeds</li> </ul>	<ul style="list-style-type: none"> <li>■ DC &lt; 1.6</li> <li>■ Grain size &lt; 100mm/4" Ø</li> </ul>

**✓ Filling nozzle / Loader**

- Sensor as overflow prevention of the truck
- Changing fine-grained to dust-like media
- Medium surrounds the sensor
- Small design / separate instrumentation



B

**Our proposal**


	<p style="text-align: center;"><b>Vibronic Soliphant M</b></p> 	<p style="text-align: center;"><b>Capacitance Minicap</b></p> 	<p style="text-align: center;"><b>Capacitance Solicap M</b></p> 
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Instrument variant with separate electronics</li> <li>■ Abrasion-resistant, maintenance-free</li> <li>■ Also for very light media</li> </ul>	<ul style="list-style-type: none"> <li>■ Very build-up compatible</li> <li>■ Maintenance-free</li> <li>■ High lateral load</li> </ul>	<ul style="list-style-type: none"> <li>■ Very robust</li> <li>■ Tensile loads up to 60kN</li> <li>■ Abrasion resistant</li> <li>■ Active condensate build-up</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process pressure: -1 to 25bar/-14 to 360psi</li> <li>■ Process temperature: -50 to +280°C/-60 to +530°F</li> <li>■ Grain size: Up to 10mm/0.4"</li> <li>■ Density: Starting 10g/l</li> <li>■ Sensor length: Starting 145mm/6"</li> <li>■ Sensor material: 316L</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure: -1 to 25bar/-14 to 360psi</li> <li>■ Process temperature: -40 to +120°C/-40 to +250°F</li> <li>■ Grain size: Up to 30mm/1"</li> <li>■ Density: —</li> <li>■ Sensor length: 140mm/5"</li> <li>■ Sensor material: PPS, FDA-listed</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure: -1 to 25bar/-14 to 360psi</li> <li>■ Process temperature: -50 to +180°C/-60 to +350°F</li> <li>■ Grain size: up to 100mm/4"</li> <li>■ Density: —</li> <li>■ Sensor length: 500 to 20,000mm/20 to 800"</li> <li>■ Sensor material: Steel, 316L, PTFE</li> </ul>
<b>Application limits</b>	<ul style="list-style-type: none"> <li>■ See capacitance for media &gt; 10mm/0.4" Ø</li> <li>■ Strong build-up formation</li> </ul>	<ul style="list-style-type: none"> <li>■ DC &lt; 1.6</li> </ul>	<ul style="list-style-type: none"> <li>■ DC &lt; 1.6</li> <li>■ Grain size &lt; 100mm/4" Ø</li> </ul>

### 3.2 Selection of measuring principle according to process requirements




B

#### ✓ Hygiene applications

- Applications with high demands on process connection, housing and sensor cleaning
- Sensor surfaces suitable for sanitary applications, high-quality finish
- Hazardous areas




#### Our proposal

	Vibronic Soliphant M	Capacitance Minicap	Capacitance Nivector
			
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Build-up and abrasion monitoring</li> <li>■ Sensor material 316L</li> <li>■ Surface roughness (0.8µm)</li> <li>■ Special steel housing</li> <li>■ Dairy fittings available</li> <li>■ 3.1 certificate</li> <li>■ Maintenance-free</li> </ul>	<ul style="list-style-type: none"> <li>■ FDA-listed sensor material</li> <li>■ Build-up compensation</li> <li>■ Maintenance-free</li> </ul>	<ul style="list-style-type: none"> <li>■ Protector for abrasion protection (FDA-listed)</li> <li>■ Small dimensions</li> <li>■ External measurement in plastic tanks</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process pressure -1 to 25bar/ -14 to 360psi</li> <li>■ Process temperature -50 to +280°C/ -50 to +540°F</li> <li>■ Process connection Triclamp, flanges, thread</li> <li>■ Grain size Up to 10mm/0.4"</li> <li>■ Density Starting 10g/l</li> <li>■ Sensor material 316L (0.8µm), PTFE, ETFE</li> <li>■ Measuring range 145 to 20,000mm/ 6 to 800"</li> <li>■ Approvals Regional Ex approvals</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure -1 to 25bar/ -14.5 to 360psi</li> <li>■ Process temperature -40 to +120°C/ -40 to +250°F</li> <li>■ Thread Thread</li> <li>■ Grain size Up to 30mm/1.2"</li> <li>■ Density -</li> <li>■ Sensor material PPS</li> <li>■ Measuring range 140 to 6,000mm/ 6 to 240"</li> <li>■ Approvals Regional Ex approvals</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure -1 to 6bar/ -14 to 80psi</li> <li>■ Process temperature -20 to +80°C/ -4 to +180°F</li> <li>■ Thread Thread</li> <li>■ Grain size Up to 10mm/0.4"</li> <li>■ Density -</li> <li>■ Sensor material PC, ETFE</li> <li>■ Measuring range 30mm/1.2"</li> <li>■ Approvals Regional Ex approvals</li> </ul>
<b>Application limits</b>	<ul style="list-style-type: none"> <li>■ See capacitance for media &gt; 10mm/0.4" Ø</li> </ul>	<ul style="list-style-type: none"> <li>■ See vibronic if metal sensor is required or for media with strong abrasion or DC &lt; 1.6</li> </ul>	<ul style="list-style-type: none"> <li>■ See capacitance for media &gt; 10mm/0.4" Ø</li> </ul>

**High process temperatures**





(e.g. fly ash, hot minerals,...)

- Silos/coolers with hot media (e.g. after furnaces)
- High temperatures above 150°C/300°F
- Separate instrumentation with separate electronics



B


**Our proposal**

	<b>Vibronic Soliphant M</b> 	<b>Capacitance Solicap S</b> 	<b>Microwave Soliwave</b> 	<b>Radiometric Gammapilot</b> 
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Up to 280°C/540°F</li> <li>■ Universal</li> <li>■ For light weight media</li> <li>■ Build-up alarm</li> </ul>	<ul style="list-style-type: none"> <li>■ Up to 400°C/750°F</li> <li>■ Very robust</li> <li>■ Inactive length, active condensate build-up</li> <li>■ Sword probe or rope probe</li> </ul>	<ul style="list-style-type: none"> <li>■ Non-invasive from outside when using high-temperature adapters, plugs permitting microwave penetration or inspection glass</li> </ul>	<ul style="list-style-type: none"> <li>■ Non-contact from outside</li> <li>■ Exact measurement under extreme conditions</li> <li>■ Monitoring of build-up formation</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process pressure: -1 to 25bar/ -14 to 360psi</li> <li>■ Process temperature: -50 to +280°C/ -60 to +540°F</li> <li>■ Grain size: Up to 10mm/0.4"</li> <li>■ Density: Starting 10g/l</li> <li>■ Sensor material: 316L (0.8µm)</li> <li>■ Measuring range: 145 to 20,000mm/ 6 to 800"</li> <li>■ Approvals: Regional Ex approvals</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure: -1 to 10bar/ -14 to 140psi</li> <li>■ Process temperature: 0 to +400°C/ 30 to +750°F</li> <li>■ Grain size: Up to 100mm/4" Ø</li> <li>■ Density: —</li> <li>■ Sensor material: Steel, 316L</li> <li>■ Measuring range: 200 to 20,000mm/ 6 to 900"</li> <li>■ Approvals: Regional Ex approvals, SIL</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure: 0.5 to 6.8bar/7.2 to 98psi abs. (+21bar/+305psi with HD-Adapter)</li> <li>■ Process temperature: -40 to +70°C/-40 to +158°F (+450°C/+842°F with HT-Adapter)</li> <li>■ Grain size: As required</li> <li>■ Density: Starting 10g/l</li> <li>■ Sensor material: Alu or 316Ti, PTFE or ceramic</li> <li>■ Measuring range: 30 to 100,000mm/ 1 to 4,000"</li> <li>■ Approvals: Regional Ex approvals</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure: As required</li> <li>■ Process temperature: As required</li> <li>■ Grain size: As required</li> <li>■ Density: As required</li> <li>■ Sensor material: 316L or Alu</li> <li>■ Measuring range: As required</li> <li>■ Approvals: Regional Ex approvals</li> </ul>
<b>Application limits</b>	<ul style="list-style-type: none"> <li>■ See capacitance for media &gt; 10mm/0.4" Ø</li> </ul>	<ul style="list-style-type: none"> <li>■ See microwave barrier for DC &lt; 2</li> <li>■ See microwave barrier for media &gt; 100mm/4" Ø</li> </ul>	<ul style="list-style-type: none"> <li>■ See capacitance in case of build-up with highly conductive media</li> <li>■ See capacitance in case of very low attenuation</li> </ul>	<ul style="list-style-type: none"> <li>■ Observe radiation protection provisions</li> <li>■ Further information from our sales team</li> <li>■ Applicator for configuring the measuring point</li> </ul>

## 3.2 Selection of measuring principle according to process requirements

B

## Our proposal

Vibronic  
Soliphant MCapacitance  
Solicap M

	<p><b>Advantages</b></p> <ul style="list-style-type: none"> <li>■ Build-up and abrasion monitoring</li> <li>■ Coated sensor surface available</li> <li>■ Maintenance-free</li> </ul>	<p><b>Advantages</b></p> <ul style="list-style-type: none"> <li>■ Very robust</li> <li>■ Tensile load up to 60kN</li> <li>■ Compact or separate instrumentation available</li> <li>■ Active build-up compensation</li> </ul>
<p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>■ Process pressure</li> <li>■ Process temperature</li> <li>■ Grain size</li> <li>■ Density</li> <li>■ Sensor material</li> <li>■ Measuring range</li> <li>■ Approvals</li> </ul>	<p>-1 to 25bar/-14 to 360psi</p> <p>-50 to +150°C/-60 to +300°F</p> <p>Up to 10mm/0.4" Starting 10g/l</p> <p>316L (0.8µm), ETFE coated</p> <p>145 to 20,000mm/6 to 800" Regional Ex approvals</p>	<p>-1 to 25bar/-14 to 360psi</p> <p>-50 to +180°C/-60 to +350°F</p> <p>up to 100mm/4" —</p> <p>Steel, 316L</p> <p>200 to 20,000mm/8 to 800" Regional Ex approvals, SIL</p>
<p><b>Application limits</b></p>	<ul style="list-style-type: none"> <li>■ See capacitance for grain size &gt; 10mm/0.4" Ø</li> <li>■ See microwave barrier for installation in intake flow</li> </ul>	<ul style="list-style-type: none"> <li>■ See vibronic for DC &lt; 1.6</li> <li>■ See microwave barrier for grain size &gt; 100mm/4" Ø</li> <li>■ See microwave barrier for installation in intake flow</li> </ul>

**✓ Aggressive / abrasive media**

- Media generating strong abrasion at the sensor
- Robust sensor surface
- Gas/dust Ex-area
- Possible coated sensor surface



B

**Microwave  
Soliwave**



- Non-invasive from outside when for containers permitting microwave penetration or when using permeable plugs or similar things
- Front-flush solutions
- Easy assembly

0.5 to 6.8bar/7.2 to 98psi abs.  
 (+21bar/+305psi with HD-Adapter)  
 -40 to +70°C/-40 to +158°F  
 (+450°C/+842°F with HT-Adapter)  
 As required  
 Starting 10g/l  
 Alu or 316Ti, PTFE or ceramic  
 30 to 100,000mm/1 to 4,000"

- See capacitance in case of build-up with highly conductive media
- See capacitance in case of very low attenuation

**Radiometric  
GammapiLOT**



- Non-contact from outside
- Exact measurement under extreme conditions
- Monitoring of build-up formation

As required


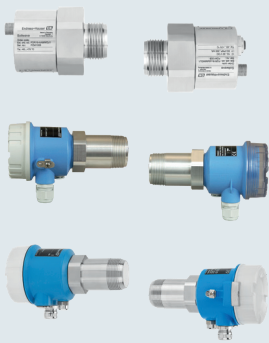
As required

As required  
 As required  
 316L or Alu  
 As required  
 Regional Ex approvals, SIL

- Observe radiation protection provisions
- Further information from our sales team
- Applicator for configuring the measuring point

### 3.2 Selection of measuring principle according to process requirements

B

	Our proposal	
	<b>Capacitance</b> <b>Solicap M</b> 	<b>Microwave</b> <b>Soliwave</b> 
<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Very robust</li> <li>■ Tensile load up to 60kN</li> <li>■ Compact or separate instrumentation available</li> <li>■ Active build-up compensation</li> </ul>	<ul style="list-style-type: none"> <li>■ Non-invasive from outside when for containers permitting microwave penetration or when using permeable plugs, inspection glasses or similar things</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process pressure: -1 to 25bar/-14 to 360psi</li> <li>■ Process temperature: -20 to +180°C/-4 to +350°F</li> <li>■ Grain size: Up to 100mm/4"</li> <li>■ Density: —</li> <li>■ Sensor material: Steel zinc coated, 316L</li> <li>■ Measuring range: 200 to 20,000mm/8 to 800"</li> <li>■ Approvals: Regional Ex approvals, SIL</li> </ul>	<ul style="list-style-type: none"> <li>0.5 to 6.8bar/7.2 to 98psi abs. (+21bar/+305psi with HD-Adapter)</li> <li>-40 to +70°C/-40 to +158°F (+450°C/+842°F with HT-Adapter)</li> <li>As required</li> <li>Starting 10g/l</li> <li>Alu or 316Ti, PTFE or ceramic</li> <li>30 to 100,000mm/1 to 4,000"</li> <li>Regional Ex approvals</li> </ul>
<b>Application limits</b>	<ul style="list-style-type: none"> <li>■ DC &lt; 1.6 or grain size &gt; 100mm/4" Ø</li> </ul>	<ul style="list-style-type: none"> <li>■ See capacitance in case of build-up with highly conductive media</li> <li>■ See capacitance in case of very low attenuation</li> </ul>



**✓ Lumpy media**  
(e.g. conveyor belts, stockpiles)

- Mining, crushers, salt production
- Grain size starting 20mm/8"
- Robust sensor surface
- Strong tensile and bending load



B

**Vibronic Soliphant T**



**Radiometric Gammapiilot**



- Jamming not possible
- Sensor material 316L
- Maintenance-free
- Easy commissioning

- Non-contact from outside
- Exact measurement under extreme conditions
- Monitoring of build-up formation

1 to 25bar/-14 to 360psi  
-40 to +150°C/-40 to +300°F

As required  
As required

< 25mm/1"  
Starting 200g/l  
316L  
225 to 1,500mm/9 to 60"  
Regional Ex approvals

As required  
As required  
316L or Alu  
As required  
Regional Ex approvals, SIL

- Grain size > 25mm/1" Ø


- Observe radiation protection provisions
- Further information from our sales team
- Applicator for configuring the measuring point

### 3.2 Selection of measuring principle according to process requirements

B

#### ✓ Dusty / fluidizing media

- Fluidizing to increase flow velocity
- Very low density (< 50g/l)
- Low conductivity (dielectric constant)
- Hazardous areas



#### Our proposal

##### Vibronic Soliphant M



##### Microwave Soliwave




##### Radiometric GammapiLOT



	<p>■ Build-up and abrasion monitoring</p> <p>■ Ideal for media with low density</p> <p>■ Self-cleaning in case of static charging</p> <p>■ Maintenance-free</p>	<p>■ Non-invasive from outside when for containers permitting microwave penetration or when using permeable plugs or similar things</p> <p>■ Front-flush solutions</p> <p>■ Easy assembly</p>	<p>■ Non-contact from outside</p> <p>■ Exact measurement under extreme conditions</p> <p>■ Monitoring of build-up formation</p>
<p><b>Advantages</b></p>	<p><b>Technical data</b></p> <ul style="list-style-type: none"> <li>■ Process pressure: -1 to 25bar / -14 to 360psi</li> <li>■ Process temperature: -50 to +280°C / -60 to +540°F</li> <li>■ Grain size: Up to 10mm/0.4"</li> <li>■ Density: Starting 10g/l</li> <li>■ Sensor material: 316L, PTFE, ETFE</li> <li>■ Measuring range: 145 to 20,000mm / 6 to 800"</li> <li>■ Approvals: Regional Ex approvals</li> </ul>	<p>0.5 to 6.8bar/7.2 to 98psi abs. (+21bar/+305psi with HD-Adapter)</p> <p>-40 to +70°C/-40 to +158°F (+450°C/+842°F with HT-Adapter)</p> <p>As required</p> <p>Starting 10g/l</p> <p>Alu or 316Ti, PTFE or ceramic</p> <p>30 to 100,000mm/1 to 4,000"</p> <p>Regional Ex approvals</p>	<p>As required</p> <p>As required</p> <p>As required</p> <p>As required</p> <p>As required</p> <p>As required</p> <p>Regional Ex approvals</p>
<p><b>Application limits</b></p>	<p>■ See capacitance for media &gt; 10 mm/0.4" Ø</p>	<p>■ See capacitance in case of build-up with highly conductive media</p> <p>■ See capacitance in case of very low attenuation</p>	<p>■ Observe radiation</p> <p>■ protection provisions</p> <p>■ Further information from our sales team</p> <p>■ Applicator for configuring the measuring point</p>

**✓ Build-up forming / hygroscopic / tacky media**

- Powdery media, tending to strong build-up on sensor and tank walls
- Clotting media
- Static charging
- Cornice formation in silos



B

**Our proposal**

**Capacitance Minicap**



**Vibronic Soliphant M/T**



**Radiometric Gammapiilot**




<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Build-up compensation</li> <li>■ Maintenance-free</li> <li>■ High mechanical stability</li> </ul>	<ul style="list-style-type: none"> <li>■ Build-up and abrasion monitoring</li> <li>■ Also for media with low density</li> <li>■ Self-cleaning effect by vibronic</li> <li>■ Maintenance-free</li> </ul>	<ul style="list-style-type: none"> <li>■ Non-contact from outside</li> <li>■ Exact measurement under extreme conditions</li> <li>■ Monitoring of build-up formation</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process pressure: -1 to 25bar/ -14 to 360psi</li> <li>■ Process temperature: -40 to +120°C/ -40 to +250°F</li> <li>■ Grain size: Up to 30mm/1.2"</li> <li>■ Density: —</li> <li>■ Measuring range: 140 to 6,000mm/ 5 to 230"</li> <li>■ Sensor material: PPS</li> <li>■ Approvals: Regional Ex approvals</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure: -1 to 25bar/ -14 to 360psi</li> <li>■ Process temperature: -50 to +280°C/ -60 to +540°F</li> <li>■ Grain size: Up to 25mm/1"</li> <li>■ Density: Starting 10g/l</li> <li>■ Measuring range: 145 to 20,000mm/ 6 to 800"</li> <li>■ Sensor material: 316L (0.8µm), PTFE</li> <li>■ Approvals: Regional Ex approvals</li> </ul>	<ul style="list-style-type: none"> <li>■ As required</li> <li>■ As required</li> <li>■ As required</li> <li>■ As required</li> <li>■ As required</li> <li>■ 316L or Alu</li> <li>■ Regional Ex approvals, SIL</li> </ul>
<b>Application limits</b>	<ul style="list-style-type: none"> <li>■ See vibronic if metal sensor is required or for media with strong abrasion or DC &lt; 1.6</li> </ul>	<ul style="list-style-type: none"> <li>■ For media &gt; 25mm/1" Ø or process temperature &gt; 280°C/540°F see capacitance probes</li> </ul>	<ul style="list-style-type: none"> <li>■ Observe radiation protection provisions</li> <li>■ Further information from our sales team</li> <li>■ Applicator for configuring the measuring point</li> </ul>

### 3.2 Selection of measuring principle according to process requirements

#### ✓ Bulk solids under water

- Sensor does not react in case of water or liquids similar to water
- Detection of settled solids under water
- Possibly high process pressures



B

C

#### Our proposal

##### Vibronic Soliphant M/T



##### Paddle Soliswitch



##### Radiometric Gammapilot





	<ul style="list-style-type: none"> <li>■ Maintenance-free</li> </ul>	<ul style="list-style-type: none"> <li>■ Price-effective sensor</li> </ul>	<ul style="list-style-type: none"> <li>■ Non-contact from outside</li> <li>■ Exact measurement under extreme conditions</li> </ul>
<b>Advantages</b>			
<b>Technical data</b> <ul style="list-style-type: none"> <li>■ Process pressure</li> <li>■ Process temperature</li> <li>■ Grain size</li> <li>■ Density</li> <li>■ Measuring range</li> <li>■ Sensor material</li> <li>■ Approvals</li> </ul>	-1 to 25bar/ -14 to 360psi -50 to +280°C/ -60 to +540°F Up to 25mm/1" Starting 10g/l 145 to 6,000mm/ 6 to 230" 316L, PTFE, ETFE Regional Ex approvals	-0.5 to 1.8bar/ -7 to 26psi -20 to +80°C/ -4 to +180°F Up to 50mm/2" Starting 100g/l 75 to 2,000mm/ 3 to 80" Special steel (303) ATEX	As required As required As required As required As required 316L Regional Ex approvals, SIL
<b>Application limits</b>	<ul style="list-style-type: none"> <li>■ Only sediment is detected</li> <li>■ Not for floating media</li> </ul>	<ul style="list-style-type: none"> <li>■ Top installation only</li> </ul>	<ul style="list-style-type: none"> <li>■ Observe radiation protection provisions</li> <li>■ Further information from our sales team</li> </ul>

## 4. Instrument selection within the measuring principle

### ✓ Capacitance

- Tried and tested in operation, robust and safe
- Easy commissioning
- Versatile



Continued on page 62

	<b>Solicap S</b> <b>FTI77</b>	<b>Solicap M</b> <b>FTI55, FTI56</b>
<b>Applications</b>		
	<ul style="list-style-type: none"> <li>■ Applications with temperatures up to 400°C/750°F</li> <li>■ Full and empty alarm</li> <li>■ Installation from top, side and bottom</li> </ul>	<ul style="list-style-type: none"> <li>■ Robust sensor for lumpy and abrasive media</li> <li>■ Full and empty alarm</li> <li>■ Installation from top, side and bottom</li> </ul>
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ Robust probe</li> <li>■ Side load 800Nm</li> <li>■ Unaffected by condensate and build-up</li> <li>■ Active build-up compensation</li> </ul>	<ul style="list-style-type: none"> <li>■ Tensile load up to 60kN</li> <li>■ Side load 300Nm</li> <li>■ Easy rope adjustment</li> <li>■ Modular design</li> <li>■ Active build-up compensation</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process pressure</li> <li>■ Process temperature</li> <li>■ Process connection</li> <li>■ Grain size</li> <li>■ Measuring range</li> <li>■ Sensor material</li> <li>■ Housing material</li> <li>■ Electric connection</li> </ul>	
	<p>-1 to 10bar/-14 to 140psi -20 to +400°C/-4 to +750°F</p> <p>Thread: 1½ (R, NPT) Flanges: EN, ANSI, JIS Up to 100mm/4"</p> <p>200 to 20,000mm/8 to 800"</p> <p>Steel, 316L, ceramic Alu, Polyester, 316L</p> <p>Separate: PFM, 3-wire, NAMUR, 8/16mA compact: DC, relay, 2-wire Regional Ex approvals, SIL Min./max. safety Sword and rope probe Starting 2</p>	<p>-1 to 25bar/-14 to 360psi -50 to +180°C/-60 to +350°F</p> <p>Thread: 1½ (R, NPT) Flanges: EN, ANSI, JIS Up to 100mm/4"</p> <p>200 to 20,000mm/8 to 800"</p> <p>Steel, 316L, PTFE Alu, Polyester, 316L</p> <p>Separate: PFM, 3-wire, NAMUR, 8/16mA compact: DC, relay, 2-wire Regional Ex approvals, SIL Min./max. safety Rod and rope probe Starting 1.6</p>


## 4. Instrument selection within the measuring principle

### Capacitance

Continued from page 61

	<b>Minicap</b> FTC260, FTC262 	<b>Nivector</b> FTI26 
<b>Applications</b>	<ul style="list-style-type: none"> <li>Particularly for build-up forming media</li> <li>Full and empty alarm</li> <li>Installation from side, top and bottom</li> </ul>	<ul style="list-style-type: none"> <li>Measurement from outside through plastic silos</li> <li>Powdery and fine-grained solids up to 10mm</li> <li>Full and empty alarm</li> <li>Installation from side and bottom</li> </ul>
<b>Special features</b>	<ul style="list-style-type: none"> <li>FDA-listed material</li> <li>Maintenance-free</li> <li>Build-up compensation</li> <li>May be used without calibration</li> </ul>	<ul style="list-style-type: none"> <li>Protector for abrasion protection (FDA-listed material)</li> </ul>
<b>Technical data</b> <ul style="list-style-type: none"> <li>Process pressure</li> <li>Process temperature</li> <li>Process connection</li> <li>Grain size</li> <li>Measuring range</li> <li>Sensor material</li> <li>Housing material</li> <li>Electric connection</li> <li>Approvals</li> </ul>	-1 to 25bar/-14 to 360psi -40 to +120°C/-40 to +250°F Thread: 1, 1½ (R, NPT) Up to 30mm/1.2" 140 to 6,000mm/5 to 230" PPS, FDA-listed Alu, Polyester DC, DPDT Regional Ex approvals	-1 to 6bar/-14 to 90psi -20 to +80°C/-4 to +180°F Thread: G1A Up to 10mm/0.4" Starting 20mm/0.8" (front-flush) PC, ECTFE PC, ECTFE AC, DC Regional Ex approvals, hygiene approvals Min./max. safety Compact Starting 2
<ul style="list-style-type: none"> <li>Settings</li> <li>Design</li> <li>DC</li> </ul>	Min./max. safety, sensitivity Rod and rope probe Starting 1.6	

## Capacitance installation instructions

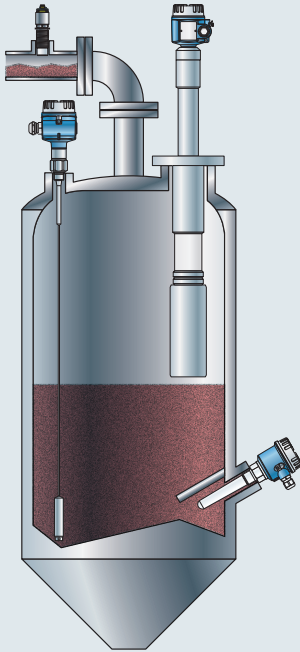

### Min. or max. detection

Rod and rope probes may be used for both max. and min. detection.

### Switch point

The switch point depends on the properties of the bulk solids (angled surface, dielectric constant, flow properties ...).

### Installation position


Rod probes may be installed from the top, side or bottom. Rope probes only from the top.

In lateral position:

- Install the sensor as inclined as possible (10-30°)
- Install a protective cover for heavy bulk solids
- Do not install sensor in the intake flow
- Provide a distance between two rod probe ends of at least 200mm/8" (FTC260)

### Rope probe

- Install probe as close to the center as possible so that the angled surface cannot press the weight to the wall
- The length of the rope may be adjusted
- Take tensile force into consideration
- Take intake flow into consideration

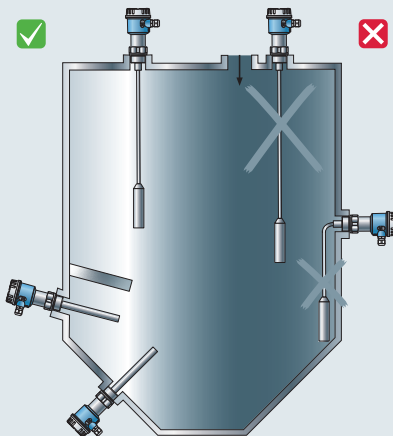



## 4. Instrument selection within the measuring principle

### Vibronic

- Universal limit switch
- Largest variety of certificates, housings, electronic inserts, process connections and sensor geometries
- Easy installation
- No wear and tear / maintenance-free

#### Applications


- | Soliphant M – Vibronic fork<br>FTM50/FTM51/FTM52   | Soliphant T – Single rod sensor<br>FTM20/FTM21   |  |
|--|--|--|
|   |   |  |
| <ul style="list-style-type: none"> <li>■ Robust min. or max. point level switch for fine-grained bulk solids</li> <li>■ Installation from the side, top and bottom</li> <li>■ Also for fluidized media</li> <li>■ Solids under water</li> <li>■ Filling nozzle applications</li> </ul>   | <ul style="list-style-type: none"> <li>■ Cost-effective and universal sensor for all fine-grained and lumpy media</li> <li>■ Solids under water</li> <li>■ Full and empty alarm</li> <li>■ Installation from the side, top and bottom</li> </ul>   |  |
| <h4>Special features</h4>  | <ul style="list-style-type: none"> <li>■ Simple self-cleaning</li> <li>■ Preferred in clotting media</li> </ul>  |  |
| <h4>Technical data</h4>  |  |  |
| <ul style="list-style-type: none"> <li>■ Process pressure</li> <li>■ Process temperature</li> <li>■ Process connection</li> <li>■ Grain size</li> <li>■ Density</li> <li>■ Measuring range</li> <li>■ Sensor material</li> <li>■ Housing material</li> <li>■ Lateral load</li> <li>■ Electric connection</li> <li>■ Approvals</li> <li>■ Settings</li> <li>■ Design</li> </ul> | <ul style="list-style-type: none"> <li>■ Build-up and abrasion monitoring</li> <li>■ Up to +280°C/+540°F</li> <li>■ Most universal sensor also for the finest media</li> <li>■ Coated and polished sensors</li> </ul> <p>-1 to 25bar/-14 to 360psi<br/>-50 to +280°C/-60 to +540°F<br/>Thread: 1/4, 1/2 (NPT, R), Triclamp<br/>Flanges: ANSI, EN, JIS,<br/>Up to 10mm/0.4"<br/>Starting 10g/l<br/>145 to 20,000mm/6 to 800"<br/>316L (0.8µm), PTFE, ETFE<br/>PE, 316L, Aluminum<br/>600N<br/>AC-2-wire, DC-PNP, relay, DPDT, PFM, 8/16mA, NAMUR<br/>Regional Ex approvals, SIL<br/>Sensitivity, time delay, diagnosis, solids detection under water, min./max. alarm<br/>Compact, tube extension, rope extension</p> | <ul style="list-style-type: none"> <li>■ -1 to 25bar/-14 to 360psi</li> <li>■ -40 to +150°C/-40 to +300°F</li> <li>■ Thread: 1, 1/4, 1/2 (R, G, NPT)</li> <li>■ Up to 25mm/1"</li> <li>■ Starting 200g/l</li> <li>■ 225 to 1,500mm/9 to 60"</li> <li>■ 316L</li> <li>■ PE, Aluminum</li> <li>■ 450N</li> <li>■ DC, DPDT</li> <li>■ Regional Ex approvals</li> <li>■ Sensitivity, min./max. alarm</li> <li>■ Compact, tube extension</li> </ul> |

#### Special features

#### Technical data



## Vibronic installation instructions

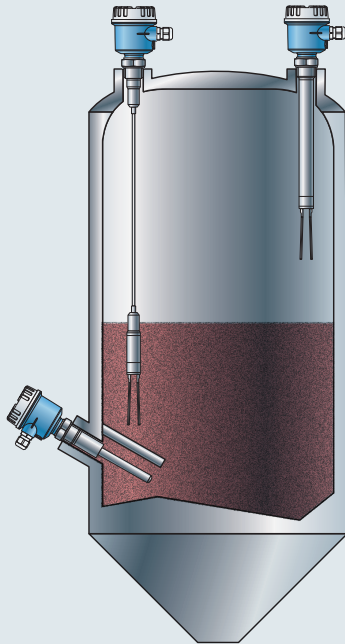

### Min. or max. detection

Compact sensors as well as those with tube and rope extension can be used for both max. and min. detection.

### Switch point

The switch point depends on the properties of the bulk solids (angled surface, density, grain size, flow properties ...).

### Installation position


Compact sensors and probes with tube extension may be installed from the top, side or bottom. Probes with rope extension only from the top.

In lateral position:

- Ensure the tines (of the fork) are aligned longitudinally
- Install the sensor as inclined as possible (10-30°)
- Install a protective cover for heavy bulk solids
- Do not install sensor in the intake flow

### Rope extension

- Install probe as close to the center as possible so that the angled surface cannot press the weight to the wall
- The length of the rope may be adjusted for the desired application (rope adjustment set)
- Take tensile force into consideration
- Take intake flow into consideration

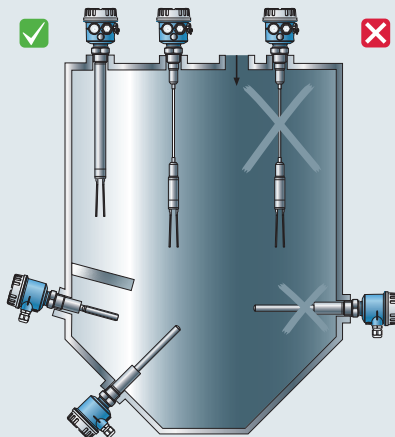

Hygiene processes

- Hygiene applications, install sensor in a manner permitting cleaning in process.

## 4. Instrument selection within the measuring principle

### Paddle

- Price-effective measuring principle for simple applications
- Calibration not required
- Rotation monitoring

C

Soliswitch  
FTE20



#### Applications

- Full and empty alarm
- Installation from the side, top or bottom


#### Special features

- 3 switching pressure levels can be preset
- Rotation monitoring (optional)
- Slip clutch against load strength

#### Technical data

- Process pressure
  - Process temperature
  - Process connection
  - Grain size
  - Density
  - Measuring range
  - Dimensions
  - Sensor material
  - Housing material
  - Electric connection
  - Approvals
  - Settings
  - Design
- 0.5 to 1.8bar/-7 to 26psi  
 -20 to +80°C/-4 to +180°F  
 Thread: 1½ (G, NPT), 1¼ NPT, ¾ G  
 Up to 50mm/2"  
 Starting 100g/l  
 75 to 2,000mm/3 to 80"  
 133mm/5.2" length  
 Special steel 303  
 PE, IP 65, NEMA4  
 AC, DC (relay output)  
 Regional Ex approvals  
 Switching pressure  
 Compact, rope extension

## Paddle installation instructions

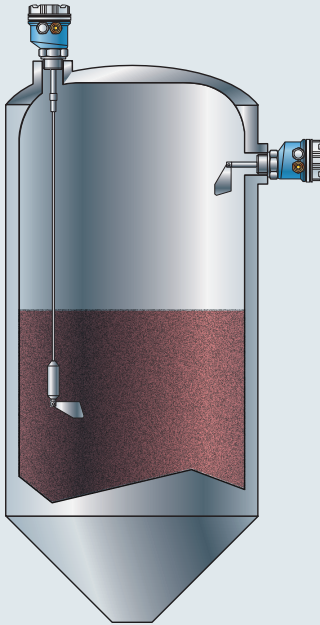

### Min. or max. detection

Compact sensors as well as those with rope extension can be used for both max. and min. detection.

### Switch point

The FTE20 can be adjusted to the bulk material by presetting the switching pressure accordingly.

### Installation position

Compact sensors and those with tube extension may be installed from the top, from below or side. Sensors with rope extension only from the top.

### In lateral position:


- Provide a protective cover against collapsing cornices
- Ensure cable glands point downwards
- Install 10-30° inclined at the top or vertically

### Please do not:

- Install in the product flow
- Use an extremely long threaded nozzle
- Install vertically with a shaft length > 300mm/11.8"
- Install inclined at the bottom

### Rope extension




- Install probe as close to the center as possible so that the angled surface cannot press the weight to the wall
- Take tensile force into consideration
- Take intake flow into consideration

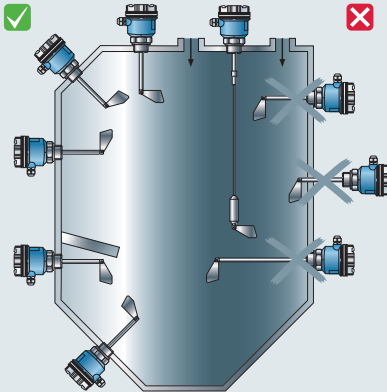


## 4. Instrument selection within the measuring principle

### Microwave barrier

- Non-contact point level detection with optional bulk flow monitoring
- Non-contact installation (transmission window) or front-flush installation (contact)
- Measuring principle almost unaffected by process conditions (e.g. pressure, temperature, aggressive and abrasive media, dust, contamination buildup)
- Also applicable in difficult applications, where other measurement methods fail
- Full and empty detection


	Soliwave FDR16/FQR16	Soliwave FDR56/FQR56	Soliwave FDR57/FQR57/FTR525
<b>Applications</b>	 <ul style="list-style-type: none"> <li>■ Detection of contamination, build-up or similar matter</li> </ul>	 <ul style="list-style-type: none"> <li>■ Detection of contamination, build-up or similar matter</li> <li>■ Ideal in hygiene applications</li> </ul>	 <ul style="list-style-type: none"> <li>■ Ideal in hygiene applications</li> <li>■ Combined point level detection and bulk flow monitoring possible</li> <li>■ Detection of contamination, build-up or similar matter</li> </ul>
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ Ultra-compact devices with integrated power supply and connectors</li> <li>■ Adjustable sensitivity and switching delay</li> <li>■ Detection even with changing product properties</li> </ul>	<ul style="list-style-type: none"> <li>■ Display of signal intensity by LED bargraph</li> <li>■ 4 to 20mA analog output</li> <li>■ Integrated switch amplifier</li> <li>■ Electronics housing 360° rotatable</li> </ul>	<ul style="list-style-type: none"> <li>■ With optional integrated bulk flow monitoring</li> <li>■ Comfortable and easy operation with graphical display</li> <li>■ Parallel mode in tightest conditions</li> </ul>
<b>Technische Daten</b>	<ul style="list-style-type: none"> <li>■ Process pressure</li> <li>■ Process temperature</li> <li>■ Process connection</li> <li>■ Grain size</li> <li>■ Density</li> <li>■ Detection range</li> <li>■ Sensor material</li> <li>■ Housing material</li> <li>■ Signal output</li> <li>■ Approvals</li> <li>■ Settings</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure</li> <li>■ Process temperature</li> <li>■ Process connection</li> <li>■ Grain size</li> <li>■ Density</li> <li>■ Detection range</li> <li>■ Sensor material</li> <li>■ Housing material</li> <li>■ Signal output</li> <li>■ Approvals</li> <li>■ Settings</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure</li> <li>■ Process temperature</li> <li>■ Process connection</li> <li>■ Grain size</li> <li>■ Density</li> <li>■ Detection range</li> <li>■ Sensor material</li> <li>■ Housing material</li> <li>■ Signal output</li> <li>■ Approvals</li> <li>■ Settings</li> </ul>
	<p>0.5 to 6.8bar/7.2 to 98psi abs. (+21bar/+305psi with HD-Adapter)</p> <p>-20 to +60°C/-4 to +140°F (+450°C/+842°F with HT-Adapter)</p> <p>Thread: 1½ (R, G, NPT)</p> <p>As required</p> <p>Starting 10g/l</p> <p>max. 20 m</p> <p>316L, PTFE</p> <p>316L</p> <p>DC-PNP 3-wire</p> <p>Regional Ex approvals</p> <p>Sensitivity, switching delay</p>	<p>0.5 to 6.8bar/7.2 to 98psi abs. (+21bar/+305psi with HD-Adapter)</p> <p>-40 to +70°C/-40 to +158°F (+450°C/+842°F with HT-Adapter)</p> <p>Thread: 1½ (R, G, NPT)</p> <p>As required</p> <p>Starting 10g/l</p> <p>0.03 to 100m/0.1 to 328ft</p> <p>PTFE, ceramics, aluminum, 316Ti</p> <p>PE, aluminum, 316L</p> <p>Relay SPDT, analog 4 to 20mA, Solid-State-Relais</p> <p>Regional Ex approvals</p> <p>FDR56: Sensitivity, hysteresis, limit signal function, switching delays, attenuation</p>	<p>0.5 to 6.8bar/7.2 to 98psi abs. (+21bar/+305psi with HD-Adapter)</p> <p>-40 to +70°C/-40 to +158°F (+450°C/+842°F with HT-Adapter)</p> <p>Thread: 1½ (R, G, NPT)</p> <p>As required</p> <p>Starting 10g/l</p> <p>0.03 to 100m/0.1 to 328ft</p> <p>PTFE, ceramics, 316Ti</p> <p>PE, Aluminium, 316L</p> <p>Relay, SPDT, Solid-State Relais, 4 to 20mA, Alarm Open Collector</p> <p>Regional Ex approvals</p> <p>FTR525: Sensitivity, hysteresis, limit signal function, switching point and switching delays, attenuation</p>

## Microwave barrier installation instructions

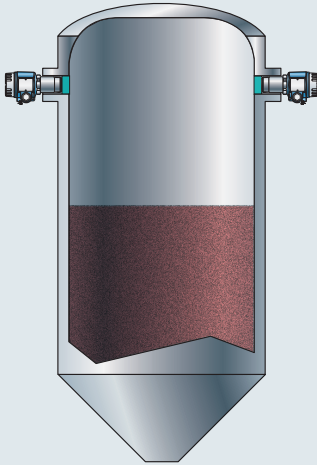


### Easy installation


1. Screw self-tightening connection thread into the process (hexagon key of 55mm/2.2")



2. Orientate transmitter and transceiver to each other (both devices must face each other)



3. Fasten housing (internal hexagon 2.5mm/0.1")



### Min. or max. detection

The microwave barrier may be used both in max. and min. detection.

### Optional flow monitoring detecting

The bulk flow should flow as close as possible to the FDR57.

### Switch point

The switch point exclusively depends on the orientation, the attenuation properties of bulk solids and poss. the parameterized delay.

### 4 to 20mA analog output

Optionally for the analysis of build-up, contamination or similar matter. E.g. the progression of contamination from „uncontaminated“ to „contaminated“ can be analyzed (limit values may be set individually).

### Orientation

- Transmitter and transceiver must be installed on opposite sides of the tank.
- If it is not possible to arrange transmitter and transceiver on opposite sides for structural reasons, the microwave ray can be deflected via planar metal mirrors (reflectors) (lowers range by approx. 10%, respectively).
- Interfering reflections on metal parts are to be avoided.
- The parallel operation of several microwave barriers to acquire different levels/point levels is possible.



### Assembly

- Direct assembly with 1½ (R, G, NPT) threaded connection through the tank wall (contact installation, independent of tank materials).
- Optional fastening by accessories (e.g. clamps or adapter flanges).
- If the tank wall is of material which does not permit microwaves to penetrate, additional windows permitting the penetration of microwaves are to be installed in the tank wall. For this purpose, extensive accessories are available (e.g. inspection glasses) and configurable accessories (e.g. plugs of plastics or ceramics).
- The electronics housing can be rotated 360°, thus providing optimum orientation after installation.


## 4. Instrument selection within the measuring principle

### Flow indicator for bulk solids

- Non-contact monitoring of pneumatic and mechanical transport processes
- Non-contact installation (transmission window) or front-flush installation (contact)
- 4 to 20mA analog output to analyze changes in solids flows

	<b>Solimotion FTR16</b> 	<b>Solimotion FTR20</b> 
<b>Applications</b>	<ul style="list-style-type: none"> <li>■ Bulk solids movement detector</li> <li>■ Non-invasive movement detection</li> </ul>	<ul style="list-style-type: none"> <li>■ Bulk solids movement detector to monitor pneumatic and mechanical transport processes</li> <li>■ Non-invasive detection in powdery to lumpy media</li> <li>■ Ideal for hygiene applications</li> <li>■ With optional accessories, e.g. inspection glasses and plugs of plastics and ceramics, may also be used in walls not permitting the penetration of microwaves</li> </ul>
<b>Special features</b>	<ul style="list-style-type: none"> <li>■ Ultra-compact flow indicator for monitoring pneumatic and mechanical transport processes of bulk solids</li> </ul>	<ul style="list-style-type: none"> <li>■ Cost-effective monitoring of bulk solids movements (movement / no movement)</li> <li>■ 4 to 20mA analog output to analyze changes of solids flows</li> <li>■ Electronics housing rotatable 360°</li> </ul>
<b>Technical data</b>	<ul style="list-style-type: none"> <li>■ Process pressure: 0.5 to 6.8bar/7.2 to 99psi abs. (+21bar/ +305psi abs. with HD-Adapter)</li> <li>■ Process temperature: -20 to +60°C/-4 to +140°F (+450°C/+842°F with HT-Adapter)</li> <li>■ Process connection: Thread: 1½ (R, G, NPT)</li> <li>■ Grain size: As required</li> <li>■ Density: &lt; 10 g/l</li> <li>■ Detection range: max. 5m/16ft</li> <li>■ Sensor material: 316L, PTFE</li> <li>■ Housing material: 316L</li> <li>■ Electric connection: DC-PNP 3-wire</li> <li>■ Approvals: Regional Ex approvals</li> <li>■ Settings: Sensitivity, switching delay</li> </ul>	<ul style="list-style-type: none"> <li>■ Process pressure: 0.5 to 6.8bar/7.2 to 99psi abs. (+21bar/ +305psi abs. with HD-Adapter)</li> <li>■ Process temperature: 40 to +70°C/-40 to +158°F (+450°C/+842°F with HT-Adapter)</li> <li>■ Process connection: Thread: 1½ (R, G, NPT)</li> <li>■ Grain size: As required</li> <li>■ Density: As required</li> <li>■ Detection range: 0.03 to 20m/0.1 to 66ft depending on bulk solid media</li> <li>■ Sensor material: PTFE, ceramics, aluminum, 316Ti</li> <li>■ Housing material: PE, aluminum, 316L</li> <li>■ Electric connection: Relay SPDT, analog 4 to 20mA, solid state relay</li> <li>■ Approvals: Regional Ex approvals</li> <li>■ Settings: Detection range, amplification, hysteresis, limit signal function, switching delays, attenuation</li> </ul>

## Installation instructions for flow indicator for bulk solids



### Detection of solids flows

The flow indicator for bulk solids may be used in all applications requiring monitoring of solids flows (**existing or not existing**) in a cost-effective manner.

### Switch point


The switch point exclusively depends on the orientation, the attenuation properties of bulk solids and poss. parameterized settings.

### 4 to 20mA analog output

Changes in the solids flow can additionally be analyzed via the optional 4 to 20mA current output.


### Orientation

- The orientation is optional.
- Vibration is to be avoided.
- A small angle  $\alpha$  can increase the signal quality




### Easy installation


1. Screw self-tightening connection thread into the process (hexagon key of 55mm/2.2")



2. Orientate FTR20



3. Fasten housing (internal hexagon 2.5mm/0.1")



### Assembly

- Direct assembly with 1½ (R, G, NPT) threaded connection through the process wall (contact installation, independent of wall materials).
- Depending on the application, FTR20 should be assembled as rigidly as possible (in low vibration of the entire plant) or completely decoupled (in stronger vibration).
- Optional fastening by accessories (e.g. clamps or adapter flanges).
- If the process wall is of material which does not permit microwaves to penetrate, additional windows permitting the penetration of microwaves are to be installed in the tank wall. For this purpose, extensive accessories are available (e.g. inspection glasses) and configurable accessories (e.g. plugs of plastics or ceramics).
- The electronics housing of FTR20 can be rotated 360°, thus providing optimum orientation after installation.

Eco-friendly produced and printed on paper from sustainable forestry.

[www.addresses.endress.com](http://www.addresses.endress.com)

---

CP00007/00/EN/18.24