

IECEx Certificate of Conformity

INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification Scheme for Explosive Atmospheres

for rules and details of the IECEx Scheme visit www.iecex.com

Certificate No.:	IECEx UL 15.0112X		Issue No: 1	Certificate history: Issue No. 1 (2016-03-10)
Status:	Current		Page 1 of 4	Issue No. 0 (2015-12-15)
Date of Issue:	2016-03-10			
Applicant:	Endress+Hauser Flowtec AG Kaegenstrasse 7, Reinach BL1, CH-4153 Switzerland			
Electrical Apparatus: Optional accessory:	Nanomass Density Meter			
Type of Protection:	Intrinsic Safety "ia"			
Marking:	Ex ia IIC T4 Ga Ex ia IIC T4 Gb -20°C ≤ Ta ≤ +60°C			
Approved for issue on behalf of th Certification Body:	e IECEx	Lucy Frieders		
Position:		Staff Engineer		
Signature: (for printed version)				
Date:				
This certificate and schedule materials. This certificate is not transferable.	ay only be reproduced in full. le and remains the property of the is	ssuing body.		

Certificate issued by:

UL LLC 333 Pfingsten Road Northbrook IL 60062-2096 United States of America

3. The Status and authenticity of this certificate may be verified by visiting the Official IECEx Website.





IECEx Certificate of Conformity

Certificate No: IECEx UL 15.0112X Issue No: 1

Date of Issue: 2016-03-10 Page 2 of 4

Manufacturer: Endress+Hauser Flowtec AG

Kaegenstrasse 7, Reinach BL1, CH-4153

Switzerland

Additional Manufacturing location(s):

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEx Quality system requirements. This certificate is granted subject to the conditions as set out in IECEx Scheme Rules, IECEx 02 and Operational Documents as amended.

STANDARDS:

The electrical apparatus and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards:

IEC 60079-0 : 2011 Explosive atmospheres - Part 0: General requirements

Edition:6.0

IEC 60079-11 : 2011 Explosive atmospheres - Part 11: Equipment protection by intrinsic safety "i"

Edition:6.0

IEC 60079-26 : 2006 Explosive atmospheres - Part 26: Equipment with equipment protection level (EPL) Ga

Edition:2

This Certificate does not indicate compliance with electrical safety and performance requirements other than those expressly included in the Standards listed above.

TEST & ASSESSMENT REPORTS:

A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in

Test Report:

US/UL/ExTR15.0128/01

Quality Assessment Report:

DE/TUN/QAR06.0004/05



Do not connect to USB and Power simultaneously.

Certificate No:

IECEx Certificate of Conformity

Issue No: 1

Date of Issue:	2016-03-10		Page 3 of 4
		Schedule	
EQUIPMENT: Equipment and systems covered to	by this certificate are as follows	:	
The apparatus is intended to meas	sure the density of liquids and (gases	
See Annex for additional information	on.		
CONDITIONS OF CERTIFICATIO	N: YES as shown below:		
For Zone 0:			
The apparatus enclosure contains	aluminium. Care must be take	en to avoid ignition hazards d	ue to impact or friction.
For Zone 0 and Zone 1:			
Disconnect power before servicing	J.		

IECEx UL 15.0112X



IECEx Certificate of Conformity

Certificate No: IECEx UL 15.0112X Issue No: 1

Date of Issue: 2016-03-10 Page 4 of 4

DETAILS OF CERTIFICATE CHANGES (for issues 1 and above):

Issue 1: Update to latest Edition of IEC 60079-11. Revision to construction and documentation not affecting safety.

Annex:

Annex to IECEx UL 15.0112X Issue 1.pdf

Annex to IECEx UL 15.0112X Issue No.: 1 Applicant: Endress+Hauser Flowtec AG

The model nomenclature is as follows:

Nanomass abcdefghijklmnopgr, where

а	b	С	d	е	f	g	h	i	j	k	- 1	m	n	0	р	q	r
1	II	III	IV	V	VI	VII	VIII	IX	X	XI	XII	XIII	XIV	XV	XVI	XVII	XVIII

- I. a = Root; DCDB for Liquid Density, DCEB for Gas Density
- II. b = Nominal diameter manifold; alphanumeric characters.
- III. c = Approval; AA = Non-hazardous area, BA = ATEX+IEC II1G Ex ia IIC T4, BB = ATEX+IEC II2G Ex ia IIC T4, 8A = ATEX+IEC II1G Ex ia IIC T4 + UL C/US Class I, Groups A, B, C, D, T4, Class I Zone 0 AEx/Ex ia IIC T4
- IV. d = Power supply, alphanumeric characters.
- V. e = Output, input; A = 2 x 4-20 mA, passive, USB Interface, cable, B = 2 x 4-20 mA, passive. RS 232 plug, C = 2 x 4-20 mA, passive, RS 232, cable, D = 2 x 4-20 mA, passive, RS 232 plug, cable,
- VI. f = Display; alphanumeric characters.
- VII. g = Housing, alphanumeric characters
- VIII. h = Cable; alphanumeric characters.
- IX. i = Electrical connection; alphanumeric characters.
- X. j = Reserved for fluid applications; alphanumeric characters.
- XI. k = Reserved for process connections; alphanumeric characters
- XII. I = Factory calibration density; alphanumeric characters.
- XIII. m = Customized parameters; alphanumeric characters.
- XIV. n = Reserved for functional applications; alphanumeric characters.
- XV. o = Reserved for Test, certificate; alphanumeric characters.
- XVI. p = Additional approval; alphanumeric characters.
- XVII. q= Accessories enclosed; alphanumeric characters.
- XVIII. r= Reserved for customer marking; alphanumeric characters.

The following entity parameters are declared by the manufacturer for the Power input:

Ui = 30V, Ii = 300 mA, Pi = 1.10W, Ci =
$$55nF$$
, Li = $220\mu H$.

The following entity parameters are declared by the manufacturer for the RS-232 input:


$$Ui = 15V$$
, $Ii = 90mA$, $Pi = 1.10W$, $Ci = 700nF$, $Li = 1000\mu H$.

The following entity parameters are declared by the manufacturer for the 4-20mA circuits:

Ui = 30V, Ii = 320 mA, Pi = 1.1W, Ci =
$$48nF$$
, Li = $150\mu H$.

The apparatus has following output entity parameters:

$$Uo = 5.88V$$
, $Io = 400$ mA, $Po = 0.6W$, $Co = 41000$ nF, $Lo = 20$ µH

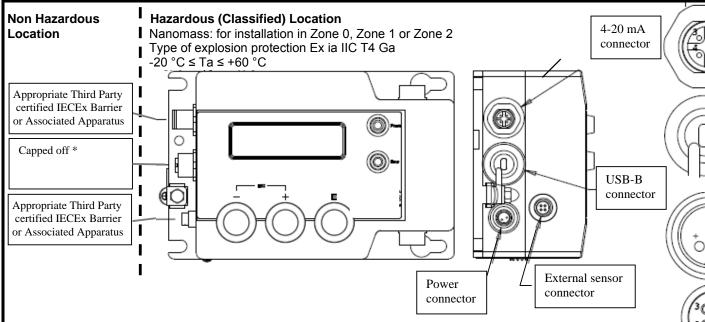

Notes: : Intrinsically safe installation for type of explosion protection Ex ia IIC T4.

- 1. Associated apparatus must be installed in accordance with the manufacturer's operation manual and the appropriate national or international standard (e.g. IEC 60079-14)
- 2. Use entity certified safety barrier or other associated equipment that satisfies the following conditions: $U_o \le U_i$ and $I_o \le I_i$ and $P_o \le P_i$ and $C_o \ge C_i + C_{cable}$ and $L_o \ge L_i + L_{cable}$ Where C_{cable} and L_{cable} are not know the following parameters shall be used: C_{cable} =200 pF/m, L_{cable} =1000 nH/m
- 3. 4-20 mA circuits should be separated by individually grounded shields.
- 4. No user replacable parts inside
- Associated apparatus output current must be limited by a resistor such that the output voltage-current plot has a linear characteristic.
- Warning: Disconnect power before servicing.
 Zone 0 Warning: Apparatus enclosure contains aluminium. Care must be taken to avoid ignition hazards due to impact or friction.
- 7. For additional product information see FES0254.

Entity Parameters										
	V_{max} , U_i	I _{max} , I _i	Pi	C _i	L _i					
Power	30 V	300 mA	1.1 W	55 nF	0.22 mH					
4–20 mA	30 V	320 mA	1.1 W	48 nF	0.15 mH					
1										

IECEV Inct	പ	lation Drawing			Cozoiobnot	17.02.2016
	Е		K	FILE: WI:\ZEIC	CHNG\FES0238\B\FI	ES0253B.000
	D		J	FILE: M:\7E10	NINOVEE COSSOVEVE	E000E0D 4
	С		Н	Ersteller: FES	/ utz	
	В	17.02.2016 / utz	G			
Aenderungen:	Α	20.11.2015 / utz	F	Mat. No.		

IECEx Installation Drawing Entity Concept Ex ia IIC T4

Nanomass, USB version

Endress+Hauser

Flowtec AG, Kaegenstrasse 7, CH-4153 Reinach BL1, Postfach

4-20 mA connector

Channel 1 Channel 2 1, 2 3,4

+ - or - +, polarity insensitive Passive

Mini USB-B connector

Mini USB-B connection

Warnings:

- * Use restricted to E+H Service during production, test, repair or overhaul.
- * USB data download and configuration done only in non-hazardous location.
- Do not have both, power applied and USB connected simultanously

Power connector

DC 8 – 30 V

External sensor connector

Pins Pressure Temperature 1 + 5VDCout power Iout

2 V+ (0-4.5 VDC) signal in V+

W- (0 VDC) signal in V-

4 Ground Ireturn


Connect simple apparatus

- Or Endress+Hauser UC2 T3C sensor cable length max. 30.5 m
- Or Entity parameters: Uo=5.88 V, Io=400 mA, Po=0.6 W, Co=41000 nF, Lo=20 μH Po = (Io * Uo) / 4

Gezeichnet	17.02.2016	utz
Geprüft		
Ex-geprüft	17.02.2016	utz
Gesehen		

FES0253B

1/1

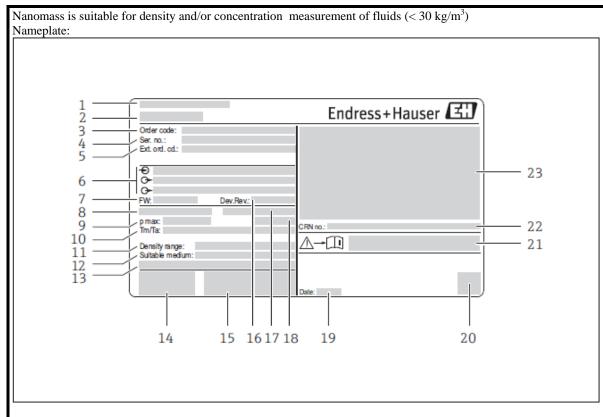

1 Owner of certificate

2 Product name

3 Order code

4 Serial number

5 Extended order code

6 Electrical ratings: e.g. available I/Os, supply voltage

7 Firmware-Version

8 Diameter of micro channel

9 Maximum nominal system pressure

10 Allowed ambient temperature and fluid temperature

11 Allowed fluid density range

12 Allowed fluids

13 Additional information for special product design

14 CE-mark, C-Tick

15 Additional information on version: certificates, approvals

16 Device revision level

17 Diameter of process connection

18 IP, type of ingress protection

19 Manufacturing date: year – month

20 2-D-matrix code

21 Number of safety relevant document

22 Certification information on CRN

23 Certificate information for type of explosion protection

By affixing the certification number IECEx UL 15.0112X compliance with the following standards is confirmed:

IEC 60079-0: 2011, IEC 60079-11: 2006, IEC 60079-26: 2006

Contact information: www.addresses.endress.com

Ambient temperature range: -20 ... + 60 °C

Allowed maximum process pressure: 20 bar (290 psi)

Installation shall be done by qualified personnel.

National installation standards shall be observed.

For installation at wall or on solid support, use installation holes and M6 screws. For installation at pole use use pole mounting set.

Normally, the measuring instrument is installed in a bypass.

Mounting in the measuring tube is realized by means of tube fitting.

Maintenance:

Do not clean with high-pressure steam.

External: clean with mild soap solution or similar products.

Internal: clean with isopropanol or similar products.

For repair or alteration follow Endress+Hauser instructions or contact the Endress+Hauser organization. Use only original spare parts.

	A 20.11.2015 / utz			u			<u> </u>		
		В		G					
	C D E			Н		Ersteller: FES / utz			
			J		EU E MAZEIOUNIO/EEO0000/A/EEO0054A				
			K	FILE: M:\ZEICHNG\FES0238\A\FES0254A.doc					
	Operational manual information					Gezeichnet	20.11.2015	utz	

Operational manual information	(Gezeichnet	20.11.2015	utz
	(Geprüft		
Nanomass	(Gesehen	20.11.2015	utz
- the property of the supplementary PIII				

Endress+Hauser 🖽

Flowtec AG, Kaegenstrasse 7, CH-4153 Reinach BL1, Postfach

FES0254A

1/1