

# CERTIFICATE OF CONFORMITY

## 1. HAZARDOUS LOCATION ELECTRICAL EQUIPMENT PER CANADIAN REQUIREMENTS

2. **Certificate No:** FM25CA0058X
3. **Equipment:** FMR20B/30B Radar Level Device  
(Type Reference and Name)
4. **Name of Listing Company:** Endress+Hauser SE+Co. KG
5. **Address of Listing Company:** Hauptstrasse 1, Maulburg D-79689, Germany

6. The examination and test results are recorded in confidential report number:

PR471167 dated 7 July 2025

7. FM Approvals LLC, certifies that the equipment described has been found to comply with the following Approval standards and other documents:

CSA C22.2 No. 94.1:2015, CSA C22.2 No. 94.2:2015, CSA C22.2 No. 213:2021, CSA C22.2 No. 60079-0:2019, CSA C22.2 No. 60079-11:2014 (R2018), CSA C22.2 No. 60529:R2021, CSA C22.2 No. 61010-1:2019

8. If the sign 'X' is placed after the certificate number, it indicates that the equipment is subject to specific conditions of use specified in the schedule to this certificate.
9. This certificate relates to the design, examination and testing of the products specified herein. The FM Approvals surveillance audit program has further determined that the manufacturing processes and quality control procedures in place are satisfactory to manufacture the product as examined, tested and Approved.

10. **Equipment Ratings:**

See Annex

11. **The marking of the equipment shall include:**

See Annex

### Certificate issued by:



J.E. Marquedant  
VP, Manager - Electrical Systems

7 July 2025

Date

To verify the availability of the Approved product, please refer to [www.approvalguide.com](http://www.approvalguide.com)

**THIS CERTIFICATE MAY ONLY BE REPRODUCED IN ITS ENTIRETY AND WITHOUT CHANGE**

FM Approvals LLC. One Technology Way, Norwood, MA 02062 USA

T: +1 (1) 781 762 4300 F: +1 (1) 781 762 9375 E-mail: [information@fmapprovals.com](mailto:information@fmapprovals.com) [www.fmapprovals.com](http://www.fmapprovals.com)

F 348 (Jul 24)




## SCHEDULE

Canadian Certificate of Conformity No: FM25CA0058X


### 12. Description of Equipment:

**General** - The FMR 20B/30B is a radar level device which converts a time-of-flight wave signal into an electrical output signal. The environment can be a hazardous area with gas or dust atmosphere. The FMR20B/30B has an 80GHz radar sensor, which transmits the wave signal direct into air. The electronic transforms the time difference between the propagated wave and the received wave into an electrical signal which is evaluated and put out as a digital (HART) measurement value.

The Block diagram below describes the FMR20B. The Compact Platform components are shown below in blue color (Main Electronic), in orange color (Terminal Electronic) and Radar Sensor modules (Sensor Power Board and Sensor Board)

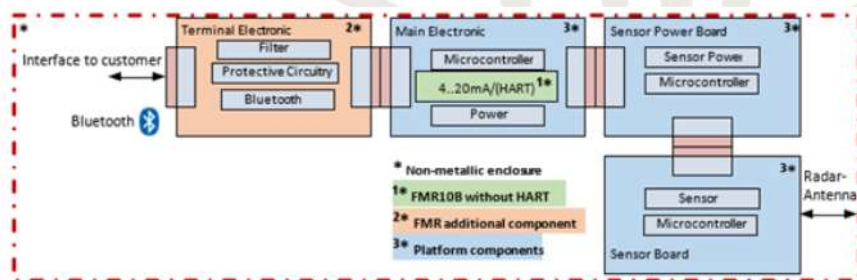

The Block diagram below describes the FMR30B. The Compact Platform components are shown in blue color (Main Electronic), in orange color (Terminal Electronic) and Radar Sensor modules (Sensor Power Board and Sensor Board).

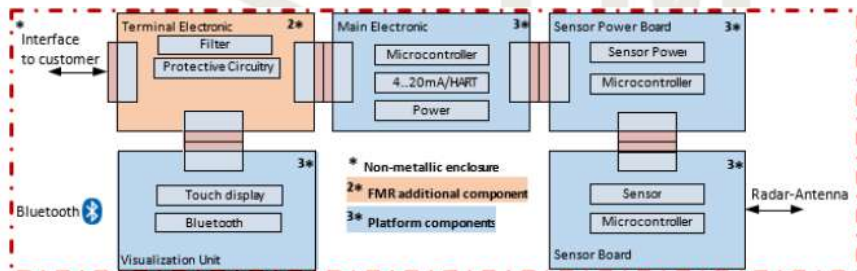

For additional information on the electronics see the following E+H Technical documents:

| Component                                                                           | Component Certificates |
|-------------------------------------------------------------------------------------|------------------------|
| Electronic Modules<br>(Main electronic, terminal electronic and Visualization Unit) | FM25CA0056U            |
| Radar Sensor Modules<br>(Sensor Power Board and Sensor Board)                       | CSA24CA80191578U       |

To verify the availability of the Approved product, please refer to [www.approvalguide.com](http://www.approvalguide.com)

**THIS CERTIFICATE MAY ONLY BE REPRODUCED IN ITS ENTIRETY AND WITHOUT CHANGE**

FM Approvals LLC. One Technology Way, Norwood, MA 02062 USA

T: +1 (1) 781 762 4300 F: +1 (1) 781 762 9375 E-mail: [information@fmaprovals.com](mailto:information@fmaprovals.com) [www.fmaprovals.com](http://www.fmaprovals.com)

F 348 (Jul 24)

## SCHEDULE

Canadian Certificate of Conformity No: FM25CA0058X

**FM Approvals**

**Construction -** For details on enclosure options for Variant 1, Variant 2 and Variant 3, see document no. 961008308-A.

The FMR20B has an Ingress Protection rating of IP66, IP68; Type 4X and 6P

The FMR30B has an Ingress Protection rating of IP66, IP67; Type 4X

### **Thermal Ratings -**

| Protection Type                                | Model Type                           | Permitted ambient and Process Temperature |
|------------------------------------------------|--------------------------------------|-------------------------------------------|
| Ex ia IIC<br>IS Class I, Division 1, ABCD      | FMR20B/30B                           | -40°C to +70°C                            |
| Ex ia IIIB<br>IS Class II, III, Division 1, FG | FMR20B (only<br>Variant 2)<br>FMR30B | -40°C to +55°C                            |
| Class I, Division 2, ABCD (NIFW)               | FMR20B/30B                           | -40°C to +70°C                            |

### **Electrical Ratings -**

The device is DC supplied.

The following values for cables are only relevant for the FMR30B (all variants), as the cable must be connected by the customer himself. In contrast, the FMR20B (all variants) is supplied with a pre-installed cable (length can be ordered up to a maximum of 300m):

Cable Inductance  $L_{\text{cable}} = 1 \mu\text{H/m}$

Cable Capacitance  $C_{\text{cable}} = 200 \text{ pF/m}$

| Designation                                    | 4...20mA HART (X100) L+ / L-                                                                                            |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Ex ia IIC<br>IS Class I, Division 1, ABCD      | $U_i \leq 30\text{V}$<br>$I_i \leq 100\text{mA}$<br>$P_i \leq 700\text{mW}$<br>$C_i = 18\text{nF}$<br>$L_i = 0\text{H}$ |
| Ex ia IIIB<br>IS Class II, III, Division 1, FG | $U_i \leq 30\text{V}$<br>$I_i \leq 100\text{mA}$<br>$P_i \leq 650\text{mW}$<br>$C_i = 18\text{nF}$<br>$L_i = 0\text{H}$ |

To verify the availability of the Approved product, please refer to [www.approvalguide.com](http://www.approvalguide.com)

**THIS CERTIFICATE MAY ONLY BE REPRODUCED IN ITS ENTIRETY AND WITHOUT CHANGE**

FM Approvals LLC. One Technology Way, Norwood, MA 02062 USA

T: +1 (1) 781 762 4300 F: +1 (1) 781 762 9375 E-mail: [information@fmaprovals.com](mailto:information@fmaprovals.com) [www.fmaprovals.com](http://www.fmaprovals.com)

F 348 (Jul 24)



## **SCHEDULE**

Canadian Certificate of Conformity No: FM25CA0058X

**FM Approvals**

|                                  |                                                                                      |
|----------------------------------|--------------------------------------------------------------------------------------|
| Class I, Division 2, ABCD (NIFW) | $U_i \leq 30V$<br>$I_i \leq 100mA$<br>$P_i \leq 700mW$<br>$C_i = 18nF$<br>$L_i = 0H$ |
|----------------------------------|--------------------------------------------------------------------------------------|

See Annex for Model Codes

### **13. Specific Conditions of Use:**

See Annex

### **14. Test and Assessment Procedure and Conditions:**

This Certificate has been issued in accordance with FM Approvals Canadian Certification Scheme.

### **15. Schedule Drawings**

A copy of the technical documentation has been kept by FM Approvals.

### **16. Certificate History**

Details of the supplements to this certificate are described below:

| Date        | Description     |
|-------------|-----------------|
| 7 July 2025 | Original Issue. |

To verify the availability of the Approved product, please refer to [www.approvalguide.com](http://www.approvalguide.com)

**THIS CERTIFICATE MAY ONLY BE REPRODUCED IN ITS ENTIRETY AND WITHOUT CHANGE**

FM Approvals LLC. One Technology Way, Norwood, MA 02062 USA

T: +1 (1) 781 762 4300 F: +1 (1) 781 762 9375 E-mail: [information@fmapprovals.com](mailto:information@fmapprovals.com) [www.fmapprovals.com](http://www.fmapprovals.com)

F 348 (Jul 24)



Page 4 of 8

## SCHEDULE

Canadian Certificate of Conformity No: FM25CA0058X

**FM Approvals**

# ANNEX

## FMR20B - aa bb c d ee fff ggg h+(options) Radar Level Device

### Equipment Ratings:

Intrinsically Safe for Class I, II, III, Division 1, Groups ABCDFG, T4...T1 when installed in accordance with Control Drawing XA03522F

Intrinsically Safe for Class I, Zone 0, Ex ia IIC T4...T1 Ga when installed in accordance with Control Drawing XA03522F

Intrinsically Safe for Zone 20, Ex ia IIIB T135°C Da when installed in accordance with Control Drawing XA03522F

Nonincendive for Class I, Division 2, Groups ABCD; T4 when installed in accordance with Control Drawing XA03522F

### Markings:

Class I, II, III, Division 1, Groups ABCDFG, T4...T1; Entity - XA03522F

Ex ia IIC T4...T1 Ga; Entity - XA03522F

Ex ia IIIB T135°C Da; Entity - XA03522F

Class I, Division 2, Groups ABCD, T4 (NIFW - XA03522F)

### Description of Equipment:

|     |                                                                                                                                                                                   |
|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| aa  | Approval:<br>FC: FM C/US IS Cl.I Div.1 Gr.A-D T4, AEx/Ex ia IIC T4<br>FD: FM C/US IS Cl.II,III Div.1 Gr.FG, , AEx/Ex ia IIIB T135°C Da<br>FE: FM C/US Cl.I Div.2 Gr.A-D T4 (NIFW) |
| bb  | Output:<br>BA: 2-wire 4-20mA HART                                                                                                                                                 |
| c   | Display; Operation:<br>B: LED<br>D:LED + Bluetooth                                                                                                                                |
| d   | Electrical Connection:<br>T: Pre-installed cable                                                                                                                                  |
| ee  | Antenna:<br>BM: PVDF encapsulated, 40mm / 1-1/2"<br>BN: PVDF encapsulated, 80mm / 3"                                                                                              |
| fff | Process Connection, cable entry:<br>VCG: Thread ASME MNPT1<br>WDG: Thread G1 ISO228<br>XQ0: Without, cable entry lateral                                                          |

To verify the availability of the Approved product, please refer to [www.approvalguide.com](http://www.approvalguide.com)

**THIS CERTIFICATE MAY ONLY BE REPRODUCED IN ITS ENTIRETY AND WITHOUT CHANGE**

FM Approvals LLC. One Technology Way, Norwood, MA 02062 USA

T: +1 (1) 781 762 4300 F: +1 (1) 781 762 9375 E-mail: [information@fmaprovals.com](mailto:information@fmaprovals.com) [www.fmaprovals.com](http://www.fmaprovals.com)

F 348 (Jul 24)



Page 5 of 8

## SCHEDULE

Canadian Certificate of Conformity No: FM25CA0058X

**FM Approvals**

|           |                                                                                                                                                                      |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ggg       | Process Connection, antenna end:<br>VEE: Thread ASME MNPT1-1/2, PVDF<br>WEE: Thread ISO228 G1-1/2, PVDF<br>XR0: Without, prepared for UNI throw flange > accessories |
| h         | Cable Length:<br>A: 5m/16ft<br>B: 10m/32ft<br>C: 15m/49ft<br>D: 20m/65ft<br>E: 30m/98ft<br>F: 50m/164ft<br>1:...m<br>2:...ft                                         |
| (options) | Options:<br>Not relevant for safety                                                                                                                                  |

### Specific Conditions of Use:

1. To avoid electrostatic charging: Do not rub surfaces with a dry cloth.
2. In the event of additional or alternative special varnishing on the enclosure or other metal parts or for adhesive plates:
  - Observe the danger of electrostatic charging and discharge.
  - Do not install in the vicinity of processes ( $\leq 0.5$  m) generating strong electrostatic charges.
3. Avoid sparks caused by impact and friction.
4. In the case of process connections made of polymeric material or with polymeric coatings, avoid electrostatic charging of the plastic surfaces.
5. The process connection of the device must be installed in such a way that guarantees a sufficiently tight joint (IP66/67).
6. Applications in which the process temperature exceeds the maximum surface temperature limits of the required maximum surface temperature: The ignition hazard posed by hot surfaces on the process connecting parts of the device must be taken into account
7. It is essential for the device to use a power supply that is galvanically isolated from earth.
8. When using an intrinsically safe barrier, the barrier must be connected to the same earth as the device.
9. Refer to the temperature tables for various ambient and process temperature ranges.
10. For Class II, III, Div. 1, Groups F, G the device corresponds to a low risk of mechanical danger.

## FMR30B - aa bb c d ee fff ggg h+(options) Radar Level Device

### Equipment Ratings:

Intrinsically Safe for Class I, II, III, Division 1, Groups ABCDFG, T4...T1 when installed in accordance with Control Drawing XA03524F

To verify the availability of the Approved product, please refer to [www.approvalguide.com](http://www.approvalguide.com)

**THIS CERTIFICATE MAY ONLY BE REPRODUCED IN ITS ENTIRETY AND WITHOUT CHANGE**

FM Approvals LLC. One Technology Way, Norwood, MA 02062 USA

T: +1 (1) 781 762 4300 F: +1 (1) 781 762 9375 E-mail: [information@fmaprovals.com](mailto:information@fmaprovals.com) [www.fmaprovals.com](http://www.fmaprovals.com)

F 348 (Jul 24)



## SCHEDULE

Canadian Certificate of Conformity No: FM25CA0058X

**FM Approvals**

Intrinsically Safe for Class I, Zone 0, Ex ia IIC T4...T1 Ga when installed in accordance with Control Drawing XA03524F

Intrinsically Safe for Zone 20, Ex ia IIIB T135°C Da when installed in accordance with Control Drawing XA03524F

Nonincendive for Class I, Division 2, Groups ABCD; T4 when installed in accordance with Control Drawing XA03524F

### Markings:

Class I, II, III, Division 1, Groups ABCDFG, T4...T1; Entity - XA03524F

Ex ia IIC T4...T1 Ga; Entity - XA03524F

Ex ia IIIB T135°C Da; Entity -XA03524F

Class I, Division 2, Groups ABCD, T4 (NIFW - XA03524F)

### Description of Equipment:

|           |                                                                                                                                                                                   |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| aa        | Approval:<br>FC: FM C/US IS Cl.I Div.1 Gr.A-D T4, AEx/Ex ia IIC T4<br>FD: FM C/US IS Cl.II,III Div.1 Gr.FG, , AEx/Ex ia IIIB T135°C Da<br>FE: FM C/US Cl.I Div.2 Gr.A-D T4 (NIFW) |
| bb        | Output:<br>BA: 2-wire 4-20mA HART                                                                                                                                                 |
| c         | Display; Operation:<br>J: Color Display with Touch Control<br>K: Color Display with Touch Control + Bluetooth                                                                     |
| d         | Electrical Connection:<br>A: Cable gland M20, plastic, IP66/67; Type 4X<br>H: Thread NPT1/2, IP66/67; Type 4X<br>J: Cable gland M20, plastic blue, IP66/67; Type 4X               |
| ee        | Antenna:<br>BM: PVDF encapsulated, 40mm / 1-1/2"<br>BN: PVDF encapsulated, 80mm / 3"                                                                                              |
| fff       | Process Connection, cable entry:<br>XQ0: Without, cable entry on the side                                                                                                         |
| ggg       | Process Connection, antenna end:<br>VEE: Thread ASME MNPT1-1/2, PVDF<br>WEE: Thread ISO228 G1-1/2, PVDF<br>XR0: Without, prepared for UNI throw flange > accessories              |
| h         | Cable Length:<br>3: Without, customer side                                                                                                                                        |
| (options) | Options:<br>Not relevant for safety                                                                                                                                               |

To verify the availability of the Approved product, please refer to [www.approvalguide.com](http://www.approvalguide.com)

**THIS CERTIFICATE MAY ONLY BE REPRODUCED IN ITS ENTIRETY AND WITHOUT CHANGE**

FM Approvals LLC. One Technology Way, Norwood, MA 02062 USA

T: +1 (1) 781 762 4300 F: +1 (1) 781 762 9375 E-mail: [information@fmaprovals.com](mailto:information@fmaprovals.com) [www.fmaprovals.com](http://www.fmaprovals.com)

F 348 (Jul 24)



## **SCHEDULE**

Canadian Certificate of Conformity No: FM25CA0058X

**FM Approvals**

### **Specific Conditions of Use:**

1. To avoid electrostatic charging: Do not rub surfaces with a dry cloth.
2. In the event of additional or alternative special varnishing on the enclosure or other metal parts or for adhesive plates:
  - Observe the danger of electrostatic charging and discharge.
  - Do not install in the vicinity of processes ( $\leq 0.5$  m) generating strong electrostatic charges.
3. Avoid sparks caused by impact and friction.
4. In the case of process connections made of polymeric material or with polymeric coatings, avoid electrostatic charging of the plastic surfaces.
5. The process connection of the device must be installed in such a way that guarantees a sufficiently tight joint (IP66/67).
6. Applications in which the process temperature exceeds the maximum surface temperature limits of the required maximum surface temperature: The ignition hazard posed by hot surfaces on the process connecting parts of the device must be taken into account
7. It is essential for the device to use a power supply that is galvanically isolated from earth.
8. When using an intrinsically safe barrier, the barrier must be connected to the same earth as the device.
9. Refer to the temperature tables for various ambient and process temperature ranges.
10. For Class II, III, Div. 1, Groups F, G the device corresponds to a low risk of mechanical danger.

To verify the availability of the Approved product, please refer to [www.approvalguide.com](http://www.approvalguide.com)

**THIS CERTIFICATE MAY ONLY BE REPRODUCED IN ITS ENTIRETY AND WITHOUT CHANGE**

FM Approvals LLC. One Technology Way, Norwood, MA 02062 USA

T: +1 (1) 781 762 4300 F: +1 (1) 781 762 9375 E-mail: [information@fmaprovals.com](mailto:information@fmaprovals.com) [www.fmaprovals.com](http://www.fmaprovals.com)

F 348 (Jul 24)



Page 8 of 8