

Special Documentation

Liquiline Edge Module CYY7

Cellular radio/Ethernet version (EMR) and
Ethernet Version (EME)
Firmware update



1 Firmware update

NOTICE

Outdated firmware may pose a security risk. Access to Netilion may be blocked for edge modules with outdated firmware.

- Always keep the firmware up to date. The availability of new versions can be checked via the Netilion Firmware Update Scheduler.

Firmware updates can be installed via Netilion or via SD card.

It is not possible to downgrade to legacy firmware versions.

The firmware update can be scheduled in Netilion. Schedule the remote firmware update so that the field device is not disconnected from the network or restarted for at least 30 minutes at the scheduled time. The time from planning to update installation must be at least 24 hours. During this time, the firmware is transferred to the edge module. The firmware update starts at the planned time.


During the firmware update, the edge module restarts and performs self-tests with the new firmware. In the event of an error, the previously installed firmware version is restored. The firmware update can be tried again

Install the firmware update via Netilion:

- Update via the following link: netilion.endress.com/app/fus

Install the firmware update via SD card:

1.

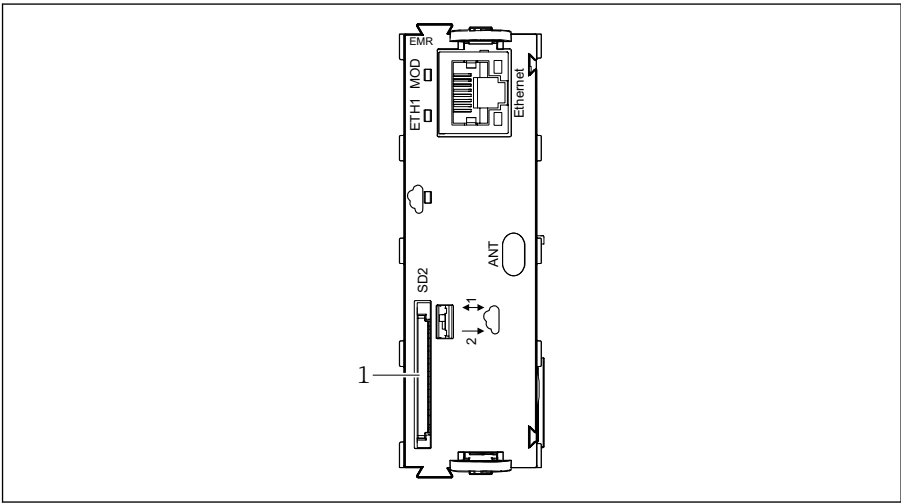

 1 Edge module

1 SD card slot SD2

Insert the SD card with the latest firmware into the SD card slot of the edge module. The SD card slot is labeled with SD2.

2. Navigate to the path: **Menu/General settings/Extended setup/Data management/Edge module update wizard**
3. Follow the instructions in the wizard.



71720549

www.addresses.endress.com
