

Safety Instructions

Memosens COS81E

Supplement to BA02066C

Safety instructions for electrical equipment for explosion-hazardous areas



Memosens COS81E

Supplement to BA02066C

Table of contents

Associated documentation 4

Supplementary documentation 4

Manufacturer's certificate 4

Identification 4

Safety instructions 4

Type code 5

Temperature table 5

Connection 6

Installation conditions 7

Associated documentation	This document is an integral part of Operating Instructions BA02066C.
Supplementary documentation	 Competence Brochure CP00021Z ■ Explosion Protection: Guidelines and General Principles ■ www.endress.com
Manufacturer's certificate	EU Declaration of Conformity <i>CE mark</i> The product meets the requirements of the harmonized European standards. As such, it complies with the legal specifications of the EU directives. The manufacturer confirms successful testing of the product by affixing to it the CE mark.
Identification	The following information on the device can be found on the nameplate: ■ Manufacturer identification ■ Order code ■ Extended order code ■ Serial number ■ Safety information and warnings ■ Ex markings ■ Certificate number ► Compare the information on the nameplate with the order. Declaration of Conformity With this declaration of conformity, the manufacturer guarantees that the product conforms to the regulations of European EMC Directive 2014/30/EU and ATEX Directive 2014/34/EU. Compliance is verified by adherence to the standards listed in the Declaration of Conformity. Ex approvals <i>ATEX</i>  II 1G Ex ia op is IIC T6... T3 Ga II 1D Ex ia op is IIIC T90°C... T200°C Da <i>IECEx</i> Ex ia op is IIC T6... T3 Ga Ex ia op is IIIC T90°C... T200°C Da The product meets the requirements of the "IEC Certification Scheme for Explosive Atmospheres". This is verified by compliance with the standards listed in the IECEx Certificate. The IECEx certificate can be viewed on the following website: www.iecex.com. Notified body IBExU Institut für Sicherheitstechnik GmbH
Safety instructions	Oxygen sensor Memosens COS81E is suitable for use in explosive atmospheres according to: ■ IECEx certificate IECEx IBE 20.0011X including amendments ■ EU type-examination certificate IBExU 20 ATEX 1093 X The corresponding EU Declaration of Conformity is part of this document.

- A maximum ambient temperature of 90 °C (194 °F) must not be exceeded at the sensor head.
- Oxygen sensors for use in the hazardous area have a special conductive O-ring. The metallic sensor shaft is electrically connected to the conductive mounting location (for example, a metallic assembly) via the O-ring.
- Appropriate measures must be taken to connect the assembly or the mounting location to ground in accordance with the Ex guidelines.
- The sensors must not be operated under electrostatically critical process conditions. Avoid strong steam or dust currents that act directly on the connection system.
- The plastic housing may only be cleaned with a damp cloth.
- Hazardous area versions of digital sensors with Memosens technology are marked by an orange/red ring on the plug-in head.
- The maximum permitted cable length between the sensor and transmitter is 100 m (330 ft).
- When using devices and sensors, comply with the regulations for electrical systems in explosive atmospheres (EN/IEC 60079-14).
- The procedures for electrical connection described in the Operating Instructions must be followed.
- This device has been designed and manufactured in accordance with Directive 2014/34/EU of February 26, 2014 and also complies with the following standards:
 - EN IEC 60079-0:2018 / IEC 60079-0:2017 Explosive atmospheres - Part 0: Equipment:- General requirements
 - EN 60079-11:2012 / IEC 60079-11:2011 + Cor.:2012 Explosive Atmospheres - Part 11: Equipment Protection by Intrinsic Safety "I"
 - EN 60079-28:2015/ IEC 60079-28:2015 Explosive atmospheres - Part 28: Protection of equipment and transmission systems using optical radiation
- Sensors containing parts made of titanium or other light metals must be protected against impact.

Type code

Memosens	COS81E-aabbccdde+g	
	aa	Approval (no ex-relevance) BG: II 1G Ex ia op is IIC T6 ... T3 Ga B4: ■ II 1G Ex ia op is IIC T6 ... T3 Ga ■ II 1D Ex ia op is IIIC T90°C... T200°C Da IF: Ex ia op is IIC T6 ... T3 Ga I5: ■ Ex ia op is IIC T6 ... T3 Ga ■ Ex ia op is IIIC T90°C... T200°C Da
	bb	Measuring range (no ex-relevance)
	cc	Cap characteristics AC = Stainless steel C-shape AU = Stainless steel U-shape BC = Titanium C-shape BU = Titanium U-shape CC = Alloy C22 C-shape CU = Alloy C22 U-shape YY = Special version
	dd	Sensor length (no ex-relevance) max. 600 mm
	e	Material of O-ring (in the cap) (no ex-relevance)
	g	Optional = one or more characters determining optional features (no ex-relevance), e.g. test or other certificates/declarations

Temperature table

Sensor	Process temperature T_p	Ambient temperature T_a
COS81E	$-15 \leq T_p \leq 130 \text{ °C}$ (T3 rep. T200 °C) $-15 \leq T_p \leq 120 \text{ °C}$ (T4 rep. T135 °C) $-15 \leq T_p \leq 70 \text{ °C}$ (T6 rep. T90°C)	$-25 \leq T_a \leq 70 \text{ °C}$ (T3 rep. T200 °C) $-25 \leq T_a \leq 90 \text{ °C}$ (T4 rep. T135 °C) $-25 \leq T_a \leq 70 \text{ °C}$ (T6 rep. T90°C)

The above temperature table applies only under the following installation conditions, which are described in the following graphic →  7. If the installation conditions cannot be met, the maximum process temperature T_p must not exceed the maximum ambient temperature T_a .

Connection

Ex specification

- The Memosens COS81E oxygen sensor is approved in accordance with the EU type-examination certificate IBExU 20 ATEX 1093 X and suitable for use in hazardous environments. The corresponding EU Declaration of Conformity is an integral part of this document.
- The approved Memosens COS81E digital oxygen sensor has an intrinsically safe input with the following parameter set:

Parameter	Value
P_i	180 mW


The approved Memosens COS81E digital oxygen sensor uses inherently safe optical radiation:

Parameter	Value
P_{opt} (sensor signal)	≤ 15 mW

The approved Memosens COS81E digital oxygen sensor must be connected to a Memosens cable or cable transmitter with intrinsically safe output with the following parameter:

Parameter	Value
P_o	Max. 180 mW

Installation conditions

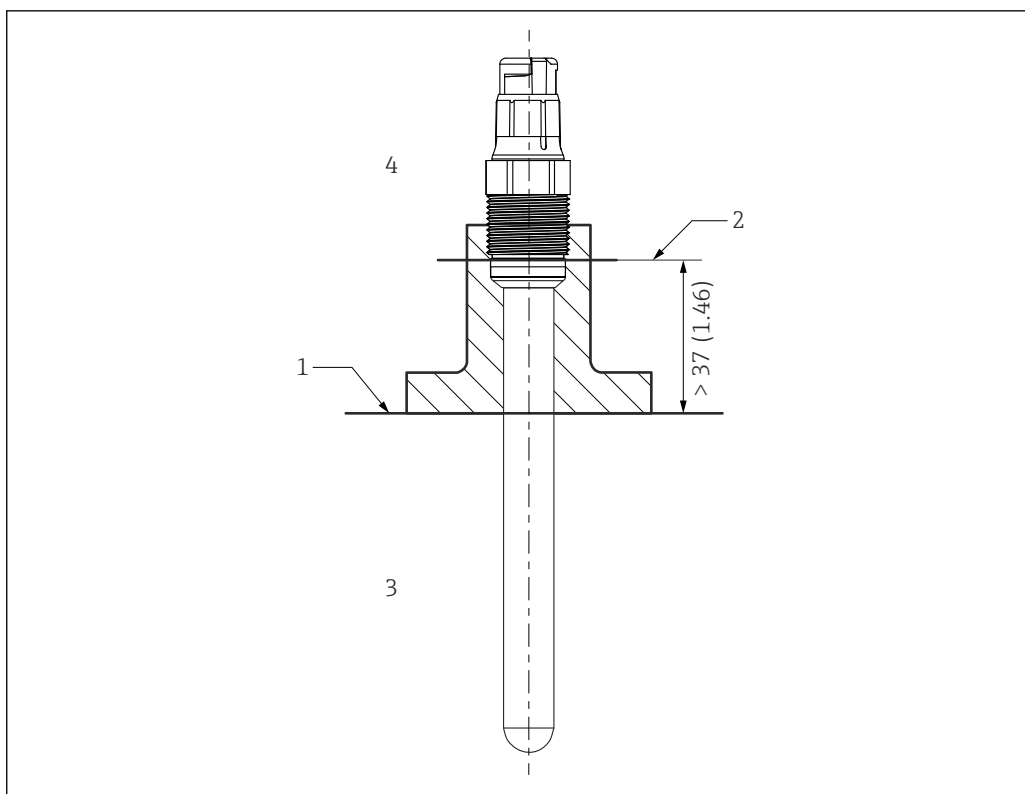

A0041281

1 Installation conditions

- 1 Limit
- 2 Distance between plug-in head (lower edge) and process medium, without ring and thrust collar
- 3 Process temperature range T_p
- 4 Ambient temperature range T_a



www.addresses.endress.com
