Products

Technical Information Prosonic S FDU90, FDU91, FDU91F, FDU92, FDU93, FDU95

Ultrasonic measuring technology



Ultrasonic sensors for level and flow measurement

Application

- Continuous, non-contact level measurement of liquids and bulk solids in silos, on conveyor belts, in material stockpiles and in crushers
- Maximum measuring range
 - FDU90: 3 m (9.8 ft) in liquids; 1.2 m (3.9 ft) in bulk solids
 - FDU91/FDU91F: 10 m (33 ft) in liquids; 5 m (16 ft) in bulk solids
 - FDU92: 20 m (66 ft) in liquids; 10 m (33 ft) in bulk solids
 - FDU93: 25 m (82 ft) in liquids; 15 m (49 ft) in bulk solids
 - FDU95: 45 m (148 ft) in bulk solids

Your benefits

- Integrated temperature sensor for time-of-flight correction, enabling accurate measurements even if temperatures change
- Hermetically welded PVDF sensor for maximum chemical resistance
- Suitable for harsh ambient conditions thanks to separate transmitter installation (up to 300 m (984 ft))
- $\, \bullet \,$ Self-cleaning effect ensures minimum deposit build-up
- Weather resistant and flood-proof (IP68)
- International Dust-Ex and Gas-Ex certificates available



Table of contents

Important document information 3 Document conventions 3
Function and system design5Ultrasonic level measurement5Ultrasonic flow measurement in flumes or weirs5Temperature-dependent time-of-flight correction6
Input7Blocking distance7Measuring range7Operating frequency8
Power supply9Power supply for ultrasonic sensors9Power supply for integrated sensor heater (FDU90, FDU91)9
Electrical connection10General information10Connection diagram for FDU9x \rightarrow FMU9011Connection diagram for FDU9x \rightarrow FMU9512Sensor extension cable13Shortening the sensor cable14
Installation
Environment24Degree of protection24Vibration resistance24Storage temperature24Thermal shock resistance24Electromagnetic compatibility24
Process25Process temperature25Process pressure25
Mechanical construction26Dimensions of FDU9026Dimensions of FDU9126Dimensions of FDU91F27Dimensions of FDU9227Dimensions of FDU9327Dimensions of FDU9528Dimensions of G1" counter nut28

Veight Materials of FDU90 Materials of FDU91 Materials of FDU91F Materials of FDU92 Materials of FDU93 Materials of FDU95 Materials of FDU95 Materials of connecting cable Material of G1" counter nut	28 29 29 30 30 30 31
Certificates and approvals	32 32 32 32
Ordering information	33 33 34 34
Accessories Extension cables for sensors Veather protection cover for FDU90/FDU91 Crew-in flange FAX50 Clooding protection tube for FDU90 Cantilever arm for FDU90, FDU91 and FDU92 sensors Acounting bracket for ceiling mounting CAU40 alignment unit CRB130 power supply unit for the FDU90 and FDU91 ensor heater P66 protective housing for RNB130 power supply unit	35 35 36 36 37 39 39 40 40
Supplementary documentation afety Instructions FDU90 afety Instructions FDU91 afety Instructions FDU91F afety Instructions FDU92 afety Instructions FDU93 afety Instructions FDU93 afety Instructions FDU95 occumentation for FMU90 transmitter occumentation for FMU95 transmitter	41 41 41 42 42 43 43 43

Important document information

Document conventions

Safety symbols

⚠ DANGER
This symbol alerts you to a dangerous situation. Failure to avoid this situation will result in serious or fatal injury.

WARNING

This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in serious or fatal injury.

This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in minor or medium injury.

NOTICE

This symbol contains information on procedures and other facts which do not result in personal injury.

Electrical symbols



Alternating current



Direct current and alternating current

Direct current



Ground connection

A grounded terminal which, as far as the operator is concerned, is grounded via a grounding system.

Protective earth (PE)

Ground terminals that must be connected to ground prior to establishing any other connections.

The ground terminals are located on the interior and exterior of the device:

- Interior ground terminal: protective earth is connected to the mains supply.
- Exterior ground terminal: device is connected to the plant grounding system.

Tool symbols



Phillips head screwdriver



Flat blade screwdriver



Torx screwdriver

06

Allen key



Open-ended wrench

Symbols for certain types of information and graphics



Permitted

Procedures, processes or actions that are permitted



Preferred

Procedures, processes or actions that are preferred



Forbidden

Procedures, processes or actions that are forbidden

i

Tip

Indicates additional information

(I

Reference to documentation

 $\overline{\mathbb{N}}$

Reference to graphic

Notice or individual step to be observed

1., 2., 3.

Series of steps

┕

Result of a step

Operation via operating tool

a

Write-protected parameter

1, 2, 3, ...

Item numbers

A, B, C, ...


Views

Safety instructions

Observe the safety instructions contained in the associated Operating Instructions

Function and system design

Ultrasonic level measurement

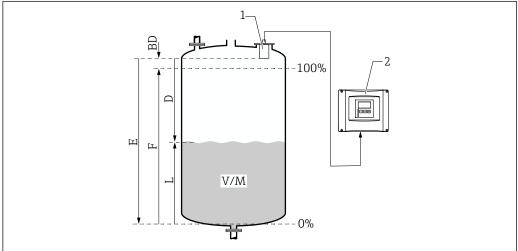

A0034882

- 1 Ultrasonic level measurement
- 1 FDU9x sensor
- 2 FMU90/FMU95 transmitter
- BD Blocking distance
- D Distance between sensor membrane and product surface
- E Empty distance
- F Span
- L Level


V/M Volume/mass

The sensor transmits ultrasonic pulses in the direction of the surface of the product. There, they are reflected back and received by the sensor. The transmitter measures the time t between the transmission and reception of a pulse. From this time, and using the sonic velocity c, the transmitter calculates the distance D between the sensor membrane and the surface of the product:

 $D = c \cdot t/2$

The level L is derived from D. With linearization, the volume V or the mass M is derived from L.

Ultrasonic flow measurement in flumes or weirs

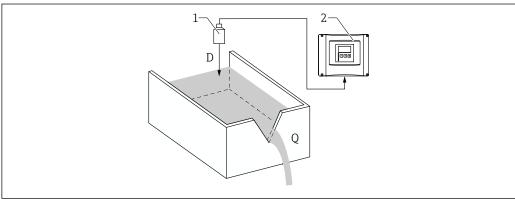

A0035219

- 2 Ultrasonic flow measurement
- 1 FDU9x sensor
- 2 FMU90/FMU95 transmitter
- D Distance between sensor membrane and surface of liquid
- Q Flow

The sensor transmits ultrasonic pulses in the direction of the surface of the liquid. There, they are reflected back and received by the sensor. The transmitter measures the time t between the transmission and reception of a pulse. From this time, and using the sonic velocity c, the transmitter calculates the distance D between the sensor membrane and the surface of the liquid:

 $D = c \times t/2$

The level L is derived from D. With linearization, the flow Q is derived from L.

Temperature-dependent time-of-flight correction

For sensors without sensor heating

Via the temperature sensors integrated in the ultrasonic sensors


In the case of FDU90 and FDU91 with sensor heating

Via an external temperature sensor, to be connected to the FMU90 transmitter

Input

Blocking distance

Signals within the blocking distance (BD) range cannot be measured due to the transient response of the sensor.

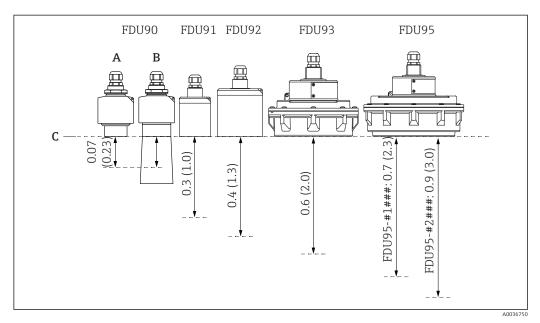

- 3 Blocking distance of FDU9x ultrasonic sensors. Engineering unit m (ft)
- A FDU90 without flooding protection tube
- B FDU90 with flooding protection tube
- C Reference point of measurement

Measuring range

Estimation of the sensor range depending on the operating conditions

- 1. Add up all the applicable attenuation values from the following lists.
- 2. From the total calculated attenuation, use the range chart below to calculate the range of the sensor.

Attenuation caused by surface of liquid

- Calm surface: 0 dB
- Waves on surface: 5 to 10 dB
- Very turbulent surface: 10 to 20 dB
- Frothy surface: contact Endress+Hauser: http://www.endress.com/contact

Attenuation caused by surface of bulk solids

- Hard, rough surface (e.g. rubble): 40 dB
- Soft surface (e.g. peat, dust-covered clinker): 40 to 60 dB

Attenuation due to dust


- No dust formation: 0 dB
- Minor dust formation: 5 dB
- Major dust formation: 5 to 20 dB

Attenuation caused by filling curtain in detection range

- No filling curtain: 0 dB
- Small volumes: 5 dB
- Large volumes: 5 to 20 dB

Attenuation caused by temperature difference between sensor and product surface

- Up to 20 °C (68 °F): 0 dB
- Up to 40 °C (104 °F): 5 to 10 dB
- Up to 80 °C (176 °F): 10 to 20 dB

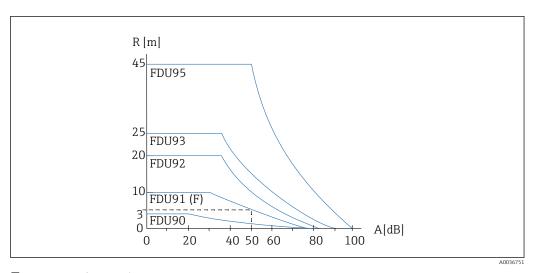

€ 4 Range chart for ultrasonic sensors

Α Total attenuation in dB

R Range in m

Operating frequency

- FDU90: 90 kHz
- FDU91: 43 kHz
- FDU91F: 42 kHz
- FDU92: 30 kHz
- FDU93: 27 kHz
- FDU95-*1***: 17 kHz
 FDU95-*2***: 18 kHz

Power supply

Power supply for ultrasonic sensors

Is provided by the transmitter.

Power supply for integrated sensor heater (FDU90, FDU91)

Device versions with sensor heater

- FDU90-***B*
- FDU91-***B*

Connection data

- \blacksquare Supply voltage: 24 $V_{DC} \pm$ 10 %
- Residual ripple: < 100 mV
- Current consumption: 250 mA per sensor
- Suitable power supply unit: RNB130 from Endress+Hauser ¹⁾



- When the sensor heater is active, the integrated temperature sensor cannot be used. Instead, use one of the following external temperature sensors:
 - Pt100
 - Omnigrad S TR61 from Endress+Hauser
- For information on connecting the external temperature sensor, see Technical Information TI00397F.

¹⁾ See → 🖺 40

Electrical connection

General information

A CAUTION

Inadequate potential equalization can compromise electrical safety

► Connect the yellow/green protective ground of the FDU91F, FDU93 and FDU95 sensors to local potential equalization after a **maximum distance of 30 m (98 ft)**. The can be done in a terminal box, at the transmitter or in the cabinet.

NOTICE

Interference signals may cause malfunctions


► Do not route the sensor cables parallel to high-voltage electric power lines or near frequency converters.

NOTICE

A damaged cable shield may cause malfunctions

- ► For pre-terminated cables: connect the black wire (shield) to the "BK" terminal.
- ► For extension cables: twist the shield and connect to the "BK" terminal.


Connection diagram for $FDU9x \rightarrow FMU90$

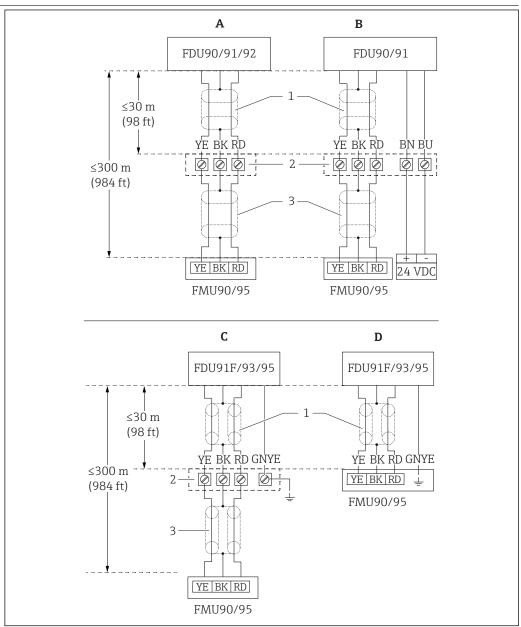

A003490

- 5 Connection diagram for sensors FDU9x; YE: yellow, BK: black; RD: red; BU: blue; BN: brown; GNYE: green/yellow
- A Without sensor heater
- B With sensor heater
- C Grounding at terminal box
- D Grounding at transmitter FMU90
- 1 Shielding of sensor cable
- 2 Terminal box
- 3 Shielding of extension cable

Connection diagram for FDU9x → FMU95

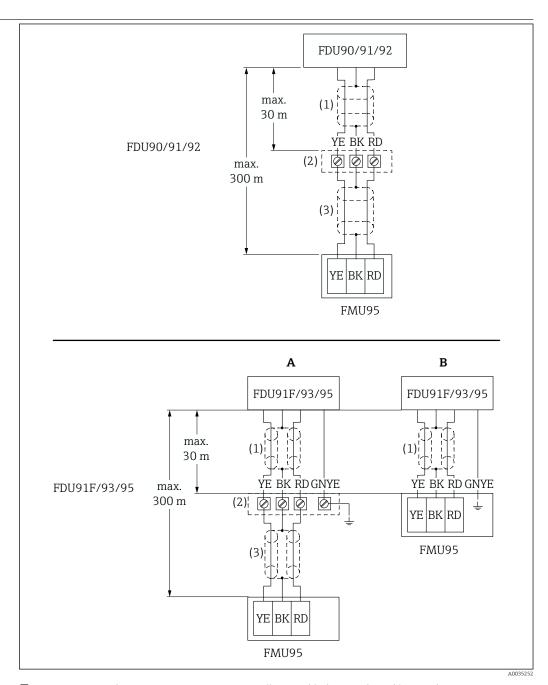

№ 6 Connection diagram for sensors FDU9x; YE: yellow, BK: black; RD: red; BU: blue; BN: brown; GNYE: green/ yellow

- Α Grounding at terminal box
- Grounding at transmitter FMU95 В
- Shielding of sensor cable Terminal box 1
- 2
- Shielding of extension cable

12

Sensor extension cable

Endress+Hauser

A WARNING

Explosion Hazard

- Use a terminal box to connect the extension cable.
- ▶ If the terminal box is installed in hazardous areas, comply with applicable national requirements.

Extension cable specifications

• Maximum total length (sensor cable + extension cable)

300 m (984 ft)

Number of wires

As per connection diagram

Shielding

One shielding braid for the YE wire and one for the RD wire (no foil shield)

Cross-section

0.75 to 2.5 mm² (18 to 14 AWG)

Resistance

Max. 8Ω per wire

Capacitance, wire to shield

Max. 60 nF

■ Protective ground (for FDU91F/93/95)

May not be within the shielding.


13

Shortening the sensor cable

NOTICE

Damaged wires or no return conductor may cause malfunctions

- ▶ Do not damage the wires when removing the insulation.
- ► After shortening the cable, twist the shielding metal braiding and connect it to the "BK" terminal.
- ▶ If the cable has a protective ground (GNYE), do **not** connect the protective ground to the cable shield.

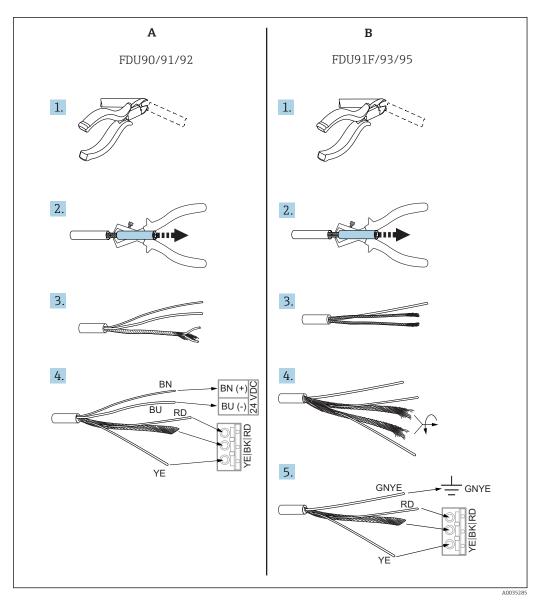


■ 7 Shortening the sensor cable

- A FDU90/91/92 sensors
- B FDU91F/93/95 sensors

The "BU" (blue) and "BN" (brown) wires are only provided on sensors with a heater.

Installation

Installation conditions for level measurement

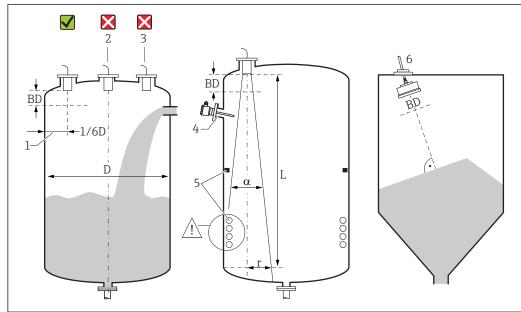

- ₽8 Installation conditions for level measurement
- 1 Recommended distance to the vessel wall: 1/6 of the vessel diameter D.
- Do not mount in the center of the vessel.
- 3 Avoid measurements through the filling curtain.
- There must be no internal fixtures in the signal beam.
- $Symmetrical\ internal\ fixtures,\ in\ particular,\ negatively\ impact\ the\ measurement.$
- For bulk solids: using the FAU40 alignment unit ($\rightarrow \stackrel{\triangle}{=} 39$), align the sensor so that it is perpendicular to the surface of the product.
- Blocking distance ($\rightarrow \blacksquare 7$)

Emitting angle/beam, FDU90

- α (typical) = 12 °
- L (max) = 3 m (9.8 ft)
- r (max) = 0.31 m (1.0 ft)

Emitting angle/beam, FDU91

- α (typical) = 9°
- L (max) = 10 m (33 ft)
- r (max) = 0.79 m (2.6 ft)

Emitting angle/beam, FDU91F

- α (typical) = 12 °
- L (max) = 10 m (33 ft)
- r (max) = 1.05 m (3.4 ft)

Emitting angle/beam, FDU92

- α (typical) = 11°
- L (max) = 20 m (66 ft)
- r (max) = 1.92 m (6.3 ft)

Emitting angle/beam, FDU93

- α (typical) = 4°
- L (max) = 25 m (82 ft)
- r (max) = 0.87 m (2.9 ft)

Emitting angle/beam, FDU95

- α (typical) = 5°
- L (max) = 45 m (148 ft)
- r (max) = 1.96 m (6.4 ft)

Other conditions

- The lower edge of the sensor should be located inside the vessel.
- The maximum level may not enter the blocking distance ($\rightarrow \equiv 7$).

Several sensors in one vessel


Sensors that are connected to a common FMU90 or FMU95 transmitter can be used in one vessel.

Installation conditions for flow measurement

Conditions

- ullet Mount the sensor on the upstream side above the maximum upstream level H_{max} plus the blocking distance BD.
- Position the sensor in the center of the flume or weir.
- Align the sensor so that it is perpendicular to the surface of the water.
- Observe the specified mounting distance (clearance) to the flume constriction or weir edge.
 The mounting distances for important flumes and weirs are provided in the following Operating Instructions:
 - BA00289F (FMU90, HART)
 - BA00293F (FMU90, PROFIBUS DP)
- Protect the sensor against sun and precipitation using the weather protection cover ($\rightarrow \triangleq 35$).

Example: Khafagi-Venturi flume

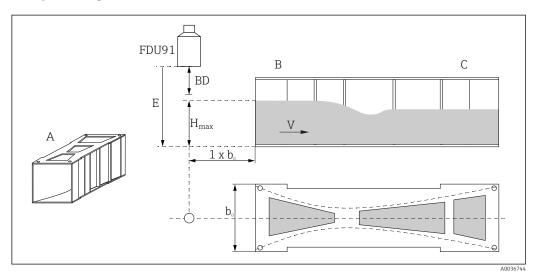

 \blacksquare 9 Installation conditions for a Khafagi-Venturi flume

A Khafagi-Venturi flume

*b*₀ Width of Khafagi-Venturi flume

B Upstream side

C Downstream side


BD Blocking distance of the sensor

E Empty calibration (to be entered during commissioning)

 H_{max} Maximum upstream level


V Flow

Example: Triangular weir

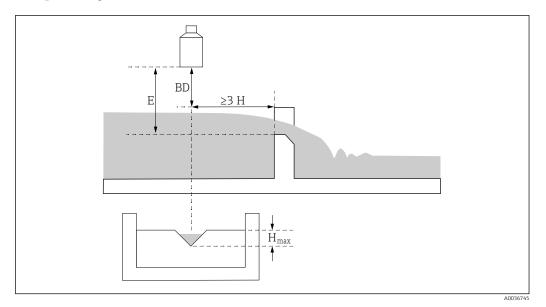


- \blacksquare 10 Installation conditions for a triangular weir
- BD Blocking distance of the sensor
- *E Empty calibration (to be entered during commissioning)*
- H_{max} Maximum upstream level

Installation options (examples)

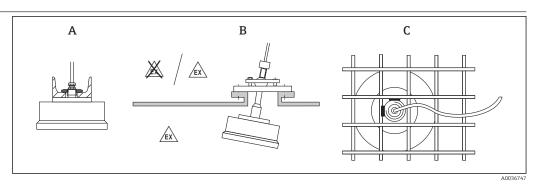


- $\blacksquare 11$ Installation in systems
- A On U-rail or bracket
- *B* With FAU40 alignment unit ($\rightarrow \implies 39$)
- C With 1" sleeve welded to a grating

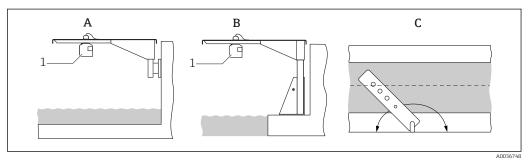

- \blacksquare 12 Installation with cantilever arm over open channels or flumes
- A Arm ($\rightarrow = 37$) with wall bracket ($\rightarrow = 39$)
- *B* Arm (\Rightarrow \triangleq 37) with mounting frame (\Rightarrow \triangleq 38)
- C The arm can be turned (e.g. to position the sensor over the center of the channel)

The FDU91F can also be flush-mounted with a slip-on flange.

Nozzle mounting

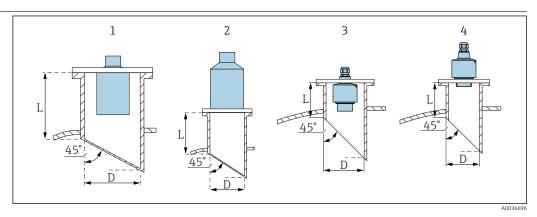

■ 13 Nozzle mounting of FDU9x sensors

D Nozzle diameter

L Nozzle length

Conditions at the nozzle

- Smooth interior, without edges or welds
- No burr on the inside of the nozzle end on the tank side
- Beveled nozzle end on tank side (ideally: 45°)

Maximum nozzle length, FDU90 - mounted on rear thread

D = DN80/3

 $L_{max} = 340 \text{ mm } (13.4 \text{ in})$

■ D = DN100/4"

 $L_{\text{max}} = 390 \text{ mm (15.4 in)}$

■ D = DN150/6" to DN300/12"

 $L_{\text{max}} = 400 \text{ mm (15.7 in)}$

Maximum nozzle length, FDU90 - flush mounting

■ D = DN50/2"

 $L_{max} = 50 \text{ mm (1.97 in)}$

■ D = DN80/3"

 $L_{\text{max}} = 250 \text{ mm } (9.84 \text{ in})$

■ D = DN100/4" to DN300/12"

 $L_{\text{max}} = 300 \text{ mm (11.8 in)}$

Maximum nozzle length, FDU91

■ D = DN80/3"

 $L_{\text{max}} = 340 \text{ mm (13.4 in)}$

■ D = DN100/4"

 $L_{\text{max}} = 390 \text{ mm } (15.4 \text{ in})$

■ D = DN150/6" to DN300/12"

 $L_{\text{max}} = 400 \text{ mm} (15.7 \text{ in})$

Maximum nozzle length, FDU91F

■ D = DN80/3"

 $L_{\text{max}} = 250 \text{ mm } (9.84 \text{ in})^{2}$

■ D = DN100/4" to DN300/12"

 $L_{max} = 300 \text{ mm } (11.8 \text{ in})^{2)}$

Maximum nozzle length, FDU92

D = DN150/6" to DN300/12" $L_{max} = 400 \text{ mm (15.7 in)}$

²⁾ Applies to flush-mounted installation; for installation via rear thread, see FDU91


Maximum nozzle length, FDU93

D = DN200/8" to DN300/12" $L_{max} = 520 \text{ mm (20.5 in)}$

Maximum nozzle length, FDU95

D = DN250/10" to DN300/12" $L_{max} = 630 \text{ mm (24.8 in)}$

Ultrasound guide pipe for measurement in narrow pits

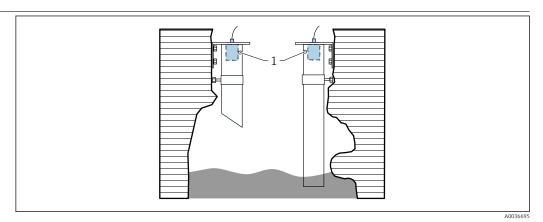

■ 14 Ultrasound guide pipe for ultrasonic measurement in narrow pits

1 Venting hole

Suitable ultrasound guide pipe

e.g. PE or PVC wastewater pipe

Minimum diameter

FDU90: DN80FDU91: DN100FDU92: DN200

Additional conditions


- Venting hole at top
- No contamination from built-up dirt. Clean regularly where necessary.

Securing the sensor

NOTICE

Risk of damage to the sensor

- ▶ Do not use the sensor cable for suspension purposes.
- ▶ Do not damage the sensor membrane when installing.

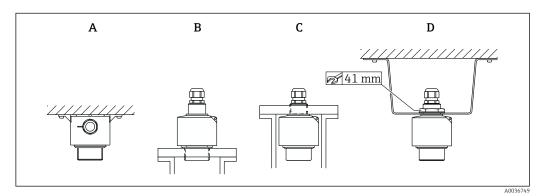

■ 15 Securing the ultrasonic sensor

- A Ceiling mounting (FDU90)
- B Mounted at front thread (FDU90)
- C Mounted at rear thread (FDU90/91/91F/92/93/95)
- D Mounted with counter nut (FDU90/91/92)


Slip-on flange without adapter flange for flush mounting of FDU91F



- The process seal is not included in the scope of supply.
- Endress+Hauser supplies DIN/EN flanges made of stainless steel AISI 316L with the material number 1.4435 or 1.4404. With regard to their stability-temperature property, the materials 1.4435 and 1.4404 are grouped together under 13EO in EN 1092-1 Tab. 18. The chemical composition of the two materials can be identical.
- For 3A applications:

The internal diameter of the adapter must be selected according to the applicable tolerance limits for 3A applications. Usually, the internal diameter of the nozzle should be larger than or equal to the internal diameter of the sensor.

Maximum process pressure for PPs slip-on flanges: 1.5 bar(abs)

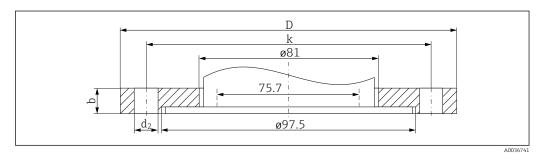

■ 16 Dimensions of FAU80 slip-on flange without adapter flange

 \bullet b = 20 mm (0.79 in)

Version suitable for DN80 PN16

- D = 200 mm (7.87 in)
- k = 160 mm (6.3 in)
- $d_2 = 18 (0.71)$
- Number $d_2 = 8$
- Order code for PPs material: FAU80-CAP
- Order code for 316L (1.4435) material: FAU80-CAJ

Version suitable for NPS 3" Cl.150 FF

- \bullet b = 23.9 (0.94)
- D = 190.5 (7.5)
- k = 152 (6.0)
- $d_2 = 19.1 (0.75)$
- Number $d_2 = 4$
- Order code for PPs material: FAU80-AAP
- Order code for 316L (1.4435) material: FAU80-AAJ

Version suitable for 10K 80A FF


- b = 18 (0.71)
- D = 185 (7.28)
- k = 150 (5.9)
- $d_2 = 19 (0.75)$
- Number $d_2 = 8$
- Order code for PPs material: FAU80-KAP
- Order code for 316L (1.4435) material: FAU80-KAJ

22

Slip-on flange with adapter flange for flush mounting of FDU91F



- The process seal is not included in the scope of supply.
- Endress+Hauser supplies DIN/EN flanges made of stainless steel AISI 316L with the material number 1.4435 or 1.4404. With regard to their stability-temperature property, the materials 1.4435 and 1.4404 are grouped together under 13EO in EN 1092-1 Tab. 18. The chemical composition of the two materials can be identical.
- For 3A applications:
 The internal diameter of the adapter must be selected according to the applicable tolerance limits for 3A applications. Usually, the internal diameter of the nozzle should be larger than or equal to the internal diameter of the sensor.
- Maximum process pressure for PPs slip-on flanges: 1.5 bar(abs)

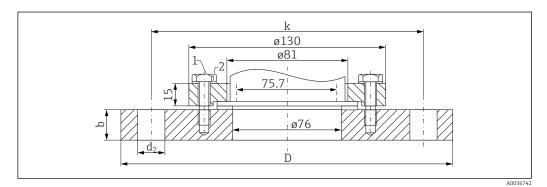

17 Dimensions of FAU80 slip-on flange with adapter flange

- Hexagonal-headed bolts made of V2A; included in the delivery
- 2 Washers made of PPs or 316L (1.4435); included in the delivery

Version suitable for DN80 PN16

- \bullet b = 20 mm (0.79 in)
- D = 220 (8.66)
- k = 180 (7.09)
- $d_2 = 18 (0.71)$
- Number $d_2 = 8$
- Order code for PPs material: FAU80-CHP
- Order code for 316L (1.4435) material: FAU80-CHJ

Version suitable for NPS 3" Cl.150 FF

- \bullet b = 23.9 (0.94)
- D = 228.6 (9.0)
- k = 190.5 (7.5)
- \bullet d₂ = 19.1 (0.75)
- Number $d_2 = 4$
- Order code for PPs material: FAU80-AHP
- Order code for 316L (1.4435) material: FAU80-AHJ

Version suitable for 10K 80A FF

- \bullet b = 18 (0.71)
- D = 210 (8.27)
- k = 175 (6.89)
- $\mathbf{d}_2 = 19 (0.75)$
- Number $d_2 = 8$
- Order code for PPs material: FAU80-KHP
- Order code for 316L (1.4435) material: FAU80-KHJ

Environment

Degree of protection	Tested according to IP68/NEMA6P (24 h at 1.83 m (6 ft) under water)
Vibration resistance	DIN EN 600068-2-64; 20 to 2000 Hz; 1 (m/s ²) ² /Hz; 3x100 min
Storage temperature	Identical to process temperature (→ 🗎 25)
Thermal shock resistance	Based on DIN EN 60068-2-14; test according to min./max. process temperature; 0.5 K/min; 1000 h
Electromagnetic compatibility	Electromagnetic compatibility in accordance with all the relevant requirements outlined in the EN 61326 series and NAMUR Recommendation EMC (NE 21). For details, refer to the Declaration of Conformity. With regard to interference emission, the devices meet the requirements of class A, and are only designed for use in an "industrial environment".

Process

Process temperature

- FDU90
 - $-40 \text{ to } +80 \,^{\circ}\text{C} \, (-40 \text{ to } +176 \,^{\circ}\text{F})^{3)}$
- FDU91
 - $-40 \text{ to } +80 \,^{\circ}\text{C} \, (-40 \text{ to } +176 \,^{\circ}\text{F})^{3)}$
- FDU91F
 - Non-Ex: -40 to +105 °C (-40 to +221 °F)
 - Non-Ex, max. 30 min: 135 °C (275 °F) ⁴⁾
 - Ex: -40 to +80 °C (-40 to +176 °F)
- **■** FDU92
 - Non-Ex: -40 to +95 °C (-40 to +203 °F)
 - Ex: -40 to +80 °C (-40 to +176 °F)
- FDU93
 - Non-Ex: -40 to +95 °C (-40 to +203 °F)
 - Ex: -40 to +80 °C (-40 to +176 °F)
- FDU95-*1***
 - $-40 \text{ to } +80 \,^{\circ}\text{C} \, (-40 \text{ to } +176 \,^{\circ}\text{F})$
- FDU95-*2***
 - Non-Ex: -40 to +150 °C (-40 to +302 °F)
 - Dust-Ex: -40 to +130 °C (-40 to +266 °F)

Process pressure

■ FDU90

0.7 to 4 bar (10.15 to 58 psi)

■ FDU91

0.7 to 4 bar (10.15 to 58 psi)

■ FDU91F

0.7 to 4 bar (10.15 to 58 psi)

■ FDU92

0.7 to 4 bar (10.15 to 58 psi)

■ FDU93

0.7 to 3 bar (10.15 to 43.5 psi)

■ FDU95


0.7 to 1.5 bar (10.15 to 22 psi)

³⁾ To prevent the build-up of ice on the sensor, a version of the FDU90 and FDU91 sensors is available with integrated sensor heating.

⁴⁾ for Tri-Clamp or flush mounting


Mechanical construction

Dimensions of FDU90

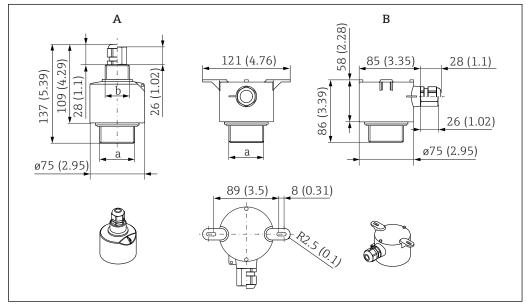


- Dimensions of FDU90. Unit of measurement mm (in)
- FDU90-* G^{***} (G1 and G1-1/2 thread); FDU909-* N^{***} (NPT 1 and NPT 1-1/2 thread) FDU90-* W^{***} (ceiling mounting) Α
- В
- Front thread; G1-1/2 or NPT1-1/2 а
- Rear thread; G1 or NPT1

Dimensions of FDU91

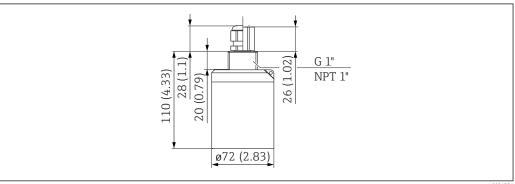

■ 19 Dimensions of FDU91. Unit of measurement mm (in)


Dimensions of FDU91F

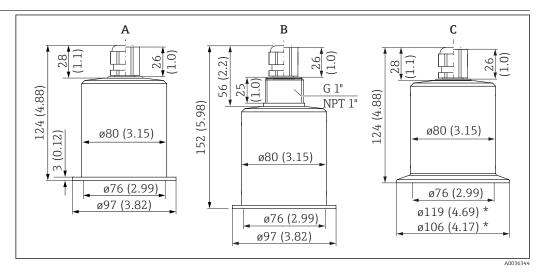

■ 20 Dimensions of FDU91F. Unit of measurement mm (in)


- Α
- В
- FDU91F-*F** (for FAU80 slip-on flange) FDU91F-*G** (G1 thread); FDU91F-*N** (NPT1 thread) FDU91F-*S** (Tri-Clamp DN101); FDU91F-*T** (Tri-Clamp DN88)

Dimensions of FDU92

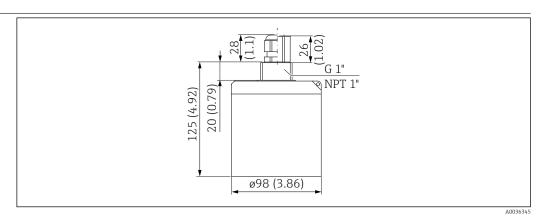


€ 21 Dimensions of FDU92. Unit of measurement mm (in)

Dimensions of FDU93

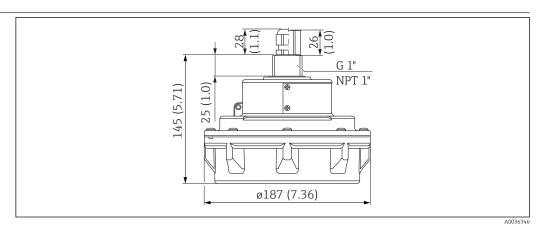


№ 22 Dimensions of FDU93. Unit of measurement mm (in)

Dimensions of FDU95

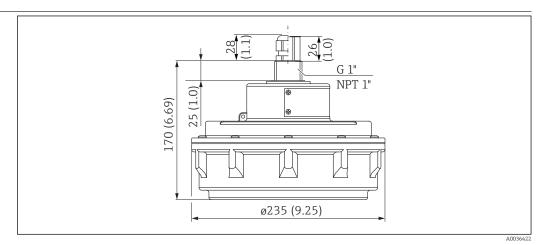

23 € Dimensions of FDU95. Unit of measurement mm (in)

Dimensions of G1" counter nut

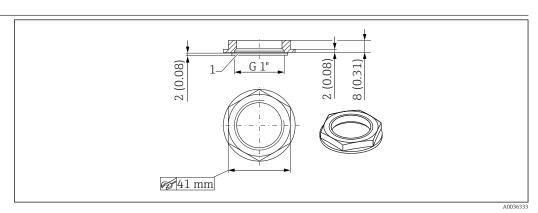

Counter nut for FDU90/91/92; dimensions: mm (in) 24

- The counter nut is included in the delivery for the following sensors:
 - FDU90-*G*** (rear G1 thread)
 FDU91-*G*** (rear G1 thread)

 - FDU92-*G** (rear G1 thread)
- The counter nut is not suitable for NPT threads.

Weight 5)

■ FDU90

- Excluding flooding protection tube: approx. 0.9 kg (1.98 lb)
- Including flooding protection tube: approx. 1.0 kg (2.21 lb)

Approx. 1.1 kg (2.43 lb)

FDU91F

Approx. 1.6 kg (3.53 lb)

■ FDU92

Approx. 2 kg (4.41 lb)

FDU93


Approx. 2.9 kg (6.39 lb)

FDU95

Approx. 4.5 kg (9.92 lb)

Including cable 5 m (16 ft)) 5)


Materials of FDU90

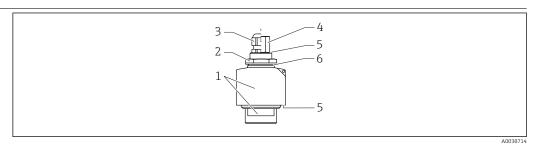

₽ 25 Materials of FDU90

- Sensor housing: PVDF
- Counter nut: PA6.6
- 3 Cable gland: PA
- Pipe adapter: CuZn nickel-plated
- 5 O-ring: EPDM
- Seal: EPDM


Materials of FDU91

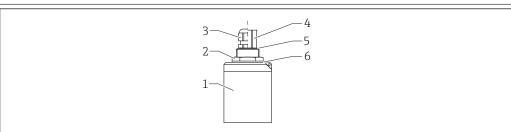

₽ 26 Materials of FDU91

- Sensor housing: PVDF
- Counter nut: PA6.6
- 3 Cable gland: PA
- Pipe adapter: CuZn nickel-plated O-ring: EPDM
- Seal: EPDM

Materials of FDU91F

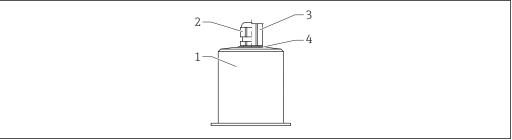


A0038716

Materials of FDU91F

- Sensor housing: 316L (1.4404/1.4435)
- Cable gland: PA
- Pipe adapter: CuZn nickel-plated
- O-ring: EPDM


Materials of FDU92

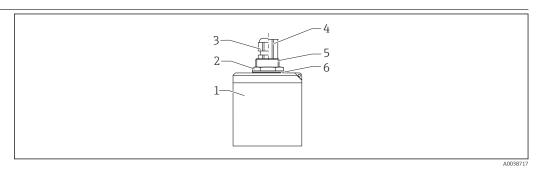

■ 28 Materials of FDU92

- 1 Sensor housing: PVDF
- 2 Counter nut: PA6.6
- 3 Cable gland: PA
- 4 Pipe adapter: CuZn nickel-plated
- 5 O-ring: EPDM
- 6 Seal: EPDM

Materials of FDU93

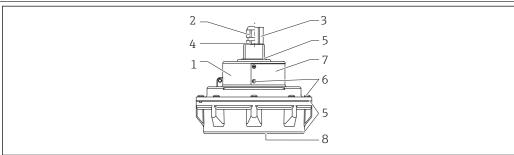


A0038708

■ 29 Materials of FDU93

- 1 Sensor housing: UP (unsaturated polyester resin)
- 2 Cable gland: CuZn nickel-plated
- 3 Pipe adapter: CuZn nickel-plated
- 4 O-ring: VMQ
- 5 Seal: VMQ
- 6 Screws: V2A
- 7 Nameplate: 304 (1.4301)
- 8 Sensor membrane: aluminum, PFA-coated

Materials of FDU95

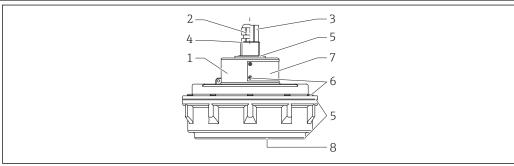

A0038709

■ 30 Materials of FDU95

- 1 Sensor housing: UP (unsaturated polyester resin)
- 2 Cable gland: CuZn nickel-plated
- 3 Pipe adapter: CuZn nickel-plated
- 4 O-ring: VMQ
- 5 Seal: VMQ
- 6 Screws: V2A
- 7 Nameplate: 304 (1.4301)
- 8 Sensor membrane: FDU95-*1***: 316L (1.4404) with PE coating; FDU95-*2***: 316L (1.4404)

Materials of connecting cable

- FDU90/91/91F/92/93: PVC
- **FDU95**: VMQ

Material of G1" counter nut

- Counter nut: PA6.6Seal (included in the delivery): EPDM

Certificates and approvals

CE mark

The measuring system meets the legal requirements of the applicable EC guidelines. These are listed in the corresponding EC Declaration of Conformity together with the standards applied.

Endress+Hauser confirms successful testing of the device by affixing to it the CE mark.

Ex approval

- Available Ex approvals: see Product Configurator
- Associated Safety Instructions: (→ 🖺 41)



FDU9x sensors with an Ex approval can be connected to the FMU90 transmitter without an Ex approval.

Other standards and quidelines

EN 60529

Degrees of protection provided by enclosures (IP code)

EN 61326 series

EMC product family standard for electrical equipment for measurement, control and laboratory use

NAMUR

User association of automation technology in process industries

Ordering information

Ordering information

Detailed ordering information is available from the following sources:

- In the Product Configurator on the Endress+Hauser website: www.endress.com -> Click "Corporate" -> Select your country -> Click "Products" -> Select the product using the filters and search field -> Open product page -> The "Configure" button to the right of the product image opens the Product Configurator.
- From your Endress+Hauser Sales Center: www.addresses.endress.com
- Product Configurator the tool for individual product configuration

 Up-to-the-minute configuration data
 - Depending on the device: Direct input of measuring point-specific information such as measuring range or operating language
 - Automatic verification of exclusion criteria
 - Automatic creation of the order code and its breakdown in PDF or Excel output format
 - Ability to order directly in the Endress+Hauser Online Shop

5-point linearity protocol


Conditions for 5-point linearity protocol

- The 5-point linearity protocol applies for the entire measuring system, consisting of the sensor and transmitter. When ordering, specify the transmitter sensor input where the sensor is to be tested.
- The linearization test is conducted under the reference operating conditions of the transmitter.

Position of the linearization points

- The 5 points of the linearity protocol are evenly distributed over the span S.
- In order to define the span, values for **Empty calibration** (E) and **Full calibration** (F) must be specified when ordering.
- The specified values are only used to create the linearity protocol. **Empty calibration** and **Full calibration** are then reset to their factory settings after the test.

Conditions for defining the span

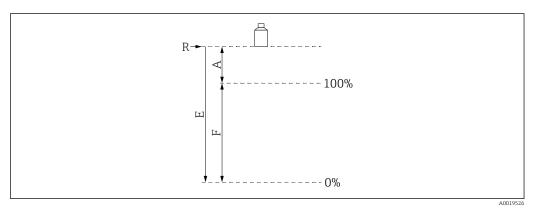

■ 31 Variables to define the span

- E "Empty calibration" (distance from sensor membrane to 0%-point)
- F "Full calibration" (distance from 0%-point to 100%-point)
- A Distance from sensor membrane to 100%-point

■ FDU90

- $E \le 3000 \text{ mm} (118 \text{ in})$
- F =100 to 2 900 mm (3.94 to 114 in)
- $A \ge 160 \text{ mm } (6.3 \text{ in})$

FDU91/91F

- E ≤ 10000 mm (394 in)
- F = 100 to 9700 mm (3.94 to 382 in)
- $A \ge 300 \text{ mm} (11.8 \text{ in})$

FDU92

- $E \le 20000 \text{ mm}$ (787 in)
- F = 200 to 19600 mm (7.87 to 772 in)
- $A \ge 400 \text{ mm} (15.7 \text{ in})$

FDU93

- $E \le 20000 \text{ mm}$ (787 in)
- \blacksquare F = 250 to 19400 mm (9.84 to 764 in)
- $A \ge 600 \text{ mm} (23.6 \text{ in})$

■ FDU95

- $E \le 20000 \text{ mm}$ (787 in)
- F = 450 to 18000 mm (17.7 to 709 in)
- $A \ge 2000 \text{ mm}$ (78.7 in)

Scope of delivery

- Ordered version of the sensor
- Technical Information TI00396F (serves as the Installation Instructions and Operating Instructions)
- For certified versions: Safety Instructions (XAs)
- For FDU90/91 with a sensor heater: terminal module for installation in the field housing of the FMU90 transmitter
- For FDU90/91/92 with G1" process connection: counter nut (PA6.6) and seal (EPDM)
- For FDU93/95 with Ex-certificate: process seal (VMQ)

Accessories

Extension cables for sensors



- Maximum permissible total length (sensor cable + extension cable): 300 m (984 ft)
- The sensor cable and extension cable are the same type of cable.

FDU90/FDU91 without sensor heater

- Cable type: LiYCY 2x(0.75)
- Material: PVC
- Ambient temperature:
- Order number: 71027742

FDU90/FDU91 with sensor heater

- Cable type: LiYY 2x(0.75)D+2x0.75
- Material: PVC
- Ambient temperature:-40 to +105 °C (-40 to +221 °F)
- Order number: 71027746

FDU92

- Cable type: LiYCY 2x(0.75)
- Material: PVC
- Ambient temperature:-40 to +105 °C (-40 to +221 °F)
- Order number: 71027742


FDU91F/FDU93/FDU95

- Cable type: LiYY 2x(0.75)D+1x0.75
- Material: PVC
- Ambient temperature:-40 to +105 °C (-40 to +221 °F)
- Order number: 71027743

FDU95

- Cable type: Li2G2G 2x(0.75)D+1x0.75
- Material: silicone
- Ambient temperature:-40 to +150 °C (-40 to +302 °F)
- Order number: 71027745

Weather protection cover for FDU90/FDU91

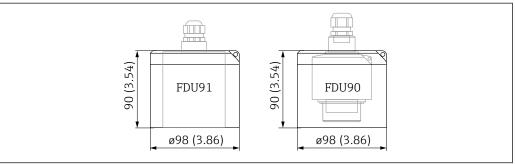


A0036332

■ 32 Weather protection cover for FDU90/FDU91. Unit of measurement mm (in)

■ Material: PVDF

■ Order number: 52025686


Screw-in flange FAX50

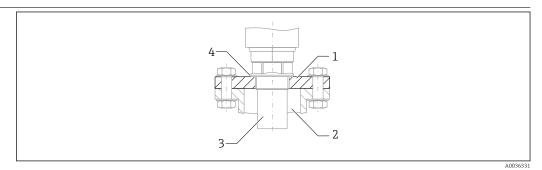

■ 33 Screw-in flange FAX50

- 1 Screw-in flange
- 2 Nozzle
- 3 Sensor
- 4 EPDM process seal; included in the delivery

Flooding protection tube for FDU90

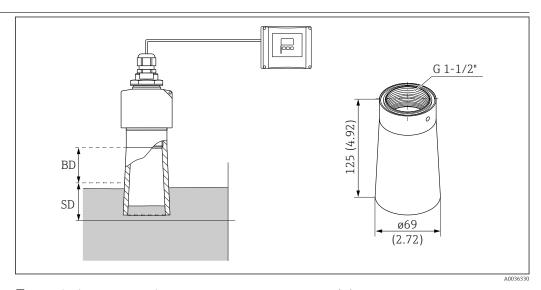

 \blacksquare 34 Flooding protection tube for FDU90. Unit of measurement mm (in)

- BD Blocking distance
- SD Safety distance (user-defined)

Use

Prevents the level of medium from entering the sensor blocking distance in the event of flooding.

Technical data

Thread: G1-1/2"
Tube material: PP
Seal material: EPDM
Weight: 0.12 kg (0.26 lb)

Ordered as an accessory

Order no.: 71091216

Ordered with FDU90

- Order code: FDU90-****B
- The sensor then always has a G 1-1/2" thread on the front irrespective of the option selected under code 020, "Process connection".


36

Installation

- 1. Insert the seal supplied and tighten the flooding protection tube hand-tight to the end stop.
- 2. Perform a new basic setup including interference echo suppression (mapping).

Cantilever arm for FDU90, FDU91 and FDU92 sensors

Application

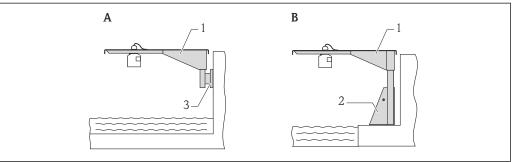


■ 35 Mounting of FDU90, FDU91 or FDU92 with cantilever arm

- A Installation on arm with wall bracket
- *B* Installation on arm with mounting frame
- 1 Arm (→ 🖺 37)
- 2 Mounting frame ($\Rightarrow \implies 38$)
- *3 Wall bracket (→ 🖺 39)*

Use of orifices

- 35 mm (1.4 in) orifice
 - FDU90 with counter nut
 - FDU91 with counter nut
 - FDU92 with counter nut
- 22 mm (0.9 in) orifice
 Temperature sensor (e.g. Omnigrad TR61 with TA50 process connection)

Dimensions

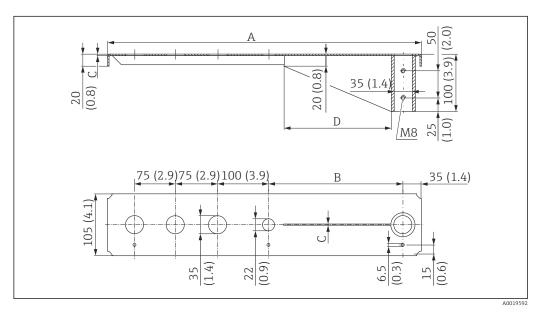

■ 36 Cantilever arm for FDU90, FDU91 and FDU92. Unit of measurement mm (in)

Retaining screws (M8) are included in delivery.

Endress+Hauser 37

A001958


Dimensions of the 583 mm (23 in) version

- \bullet A =583 mm (23 in)
- \blacksquare B = 250 mm (9.48 in)
- C = 2 mm (0.08 in)
- D = 200 mm (7.87 in)
- Material: steel, hot-dip galvanized
 - Weight: 2.1 kg (4.63 lb)
 - Order No.: 919790-0000
- Material: 316Ti (1.4571)
 - Weight: 2.0 kg (4.41 lb)
 - Order No.: 919790-0001

Dimensions of the 1085 mm (42.7 in) version

- \blacksquare A = 1085 mm (42.7 in)
- \blacksquare B = 750 mm (29.5 in)
- C = 3 mm (0.12 in)
- D = 300 mm (11.8 in)
- Material: steel, hot-dip galvanized
- Weight: 4.5 kg (9.92 lb)
- Order No.: 919790-0002
- Material: 316Ti (1.4571)
 - Weight: 4.3 kg (9.48 lb)
 - Order No.: 919790-919790-0003

Mounting frame

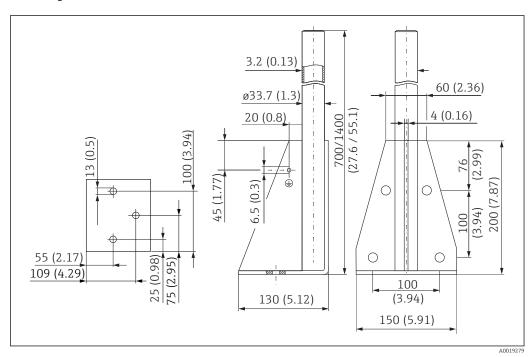

■ 37 Dimensions of mounting frame. Unit of measurement mm (in)

Version 700 mm (28 in)


- Weight: 3.2 kg (7 lb)
- Order number (steel, galvanized): 919791-0000
- Order number (316Ti, 1.4571): 919791-0001

Version 1400 mm (55 in)

- Weight: 4.9 kg (10 lb)
- Order number (steel, galvanized): 919791-0002
- Order number (316Ti, 1.4571): 919791-0003

38

Wall bracket

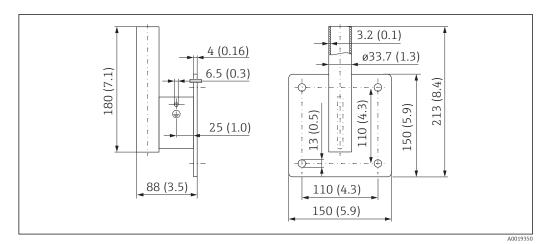


■ 38 Dimensions of the wall bracket. Unit of measurement mm (in)

■ Weight: 1.4 kg (3.1 lb)

Order No.:

Steel, galvanized version: 919792-0000316Ti (1.4571) version: 919792-0001

Mounting bracket for ceiling mounting

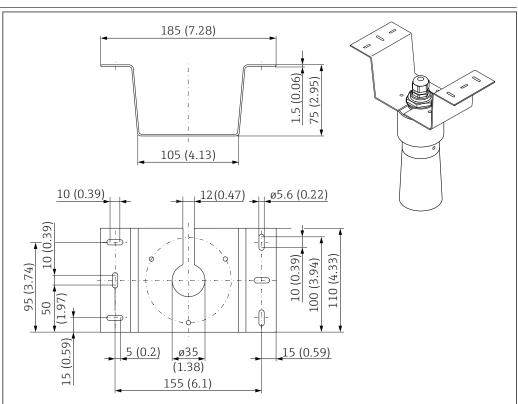

■ 39 Mounting bracket for ceiling mounting. Unit of measurement mm (in)

• Suitable for sensors FDU90, FDU91, FDU91F, FDU92

Material: 316L (1.4404)

Order No.: 71093130

FAU40 alignment unit


Use

- To align an ultrasonic sensor with the bulk solids surface
- Swivel range: 15°
- Zone separation for explosion hazardous areas

Endress+Hauser 39

A0028176

Dimensions

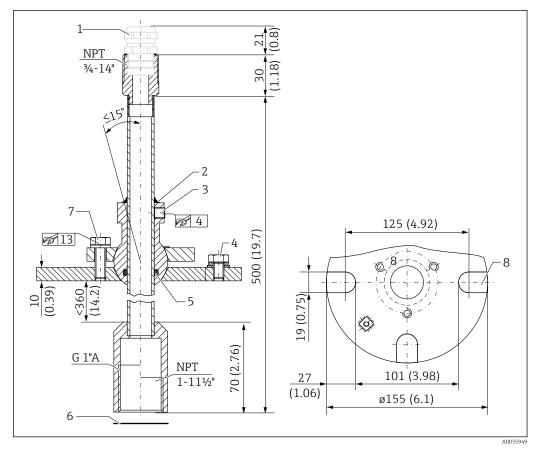

■ 40 FAU40 alignment unit. Unit of measurement mm (in)

- 1 Cable gland M20x1.5 (if selected in the product structure)
- 2 Seal here
- 3 Two Allen screws for height adjustment (8 Nm (6 lbf ft) \pm 2 Nm (\pm 1.5 lbf ft))
- 4 Grounding screw
- 5 O-ring
- 6 Seal supplied with the sensor, must be used for applications in ATEX Zone 20
- Screw for lateral adjustment (18 Nm (13.5 lbf ft) \pm 2 Nm (\pm 1.5 lbf ft))
- 8 Mounting slots (on version with UNI flange)

Additional information



Technical Information TI00179F

RNB130 power supply unit for the FDU90 and FDU91 sensor heater

Technical data

- Function: Primary switched-mode power supply
- **Input**: 100 to 240 V_{AC}
- Output: 24 V_{DC}; max 30 V in the event of an error

Connection options

- Single-phase A/C mains system
- Two phase conductors of three-phase supply systems (TN, TT or IT system according to VDE 0100 T 200/IEC 364-3)

Additional information



Technical Information TI00120R

IP66 protective housing for RNB130 power supply unit

- **Order number**: 51002468
- Additional information: Technical Information TI00080R

Supplementary documentation

Safety Instructions FDU90

XA00321F

ATEX II 2G Ex ma IIC T5

XA00322F

- ATEX II 1/2D Ex ta/tb IIIC
- ATEX II 2G Ex ma IIC T5

XA00481F

- IEC Ex ta/tb IIIC Da/Db
- IEC Ex ma IIC T5 Gb

XA00482F

IEC Ex ma IIC T5 Gb

XA00609F

- ATEX II 3G Ex na IIC T5 Gc
- ATEX II 3D Ex tc IIIC Dc

XA00665F

NEPSI Ex ma II T5, DIP A20/21 IP65

XA00666F

NEPSI Ex ma II T5

XA01342F

INMETRO Ex ma IIC T5 Gb

XA01343F

- INMETRO Ex ta/tb IIIC Da/Db
- INMETRO Ex ma IIC T5 Gb

Safety Instructions FDU91

XA00321F

ATEX II 2G Ex ma IIC T6

XA00322F

- ATEX II 1/2D Ex ta/tb IIIC
- ATEX II 2G Ex ma IIC T6

XA00481F

- IEC Ex ta/tb IIIC Da/Db
- IEC Ex ma IIC T6 Gb

XA00482F

IEC Ex ma IIC T6 Gb

XA00609F

- ATEX II 3G Ex nA IIC T6 Gc
- ATEX II 3D Ex tc IIIC Dc

XA00665F

NEPSI Ex ma II T6, DIP A20/21 IP65

XA00666F

NEPSI Ex ma II T6

XA01342F

INMETRO Ex ma IIC T6 Gb

XA01343F

- INMETRO Ex ta/tb IIIC Da/Db
- INMETRO Ex ma IIC T6 Gb

Safety Instructions FDU91F

XA00321F

ATEX II 2G Ex ma IIC T6

XA00322F

- ATEX II 1/2D Ex ta/tb IIIC
- ATEX II 2G Ex ma IIC T6

XA00481F

- IEC Ex ta/tb IIIC Da/Db
- IEC Ex ma IIC T6 Gb

XA00482F

IEC Ex ma IIC T6 Gb

XA00609F

- ATEX II 3G Ex nA IIC T6 Gc
- ATEX II 3D Ex tc IIIC Dc

XA00665F

NEPSI Ex ma II T6, DIP A20/21 IP65

XA00666F

NEPSI Ex ma II T6

XA01342F

INMETRO Ex ma IIC T6 Gb

XA01343F

- INMETRO Ex ta/tb IIIC Da/Db
- INMETRO Ex ma IIC T6 Gb

Safety Instructions FDU92

XA00321F

ATEX II 2G Ex ma IIC T6

XA00322F

- ATEX II 1/2D Ex ta/tb IIIC
- ATEX II 2G Ex ma IIC T6

XA00481F

- IEC Ex ta/tb IIIC Da/Db
- IEC Ex ma IIC T6 Gb

XA00482F

IEC Ex ma IIC T6 Gb

XA00609F

- ATEX II 3G Ex nA IIC T6 Gc
- ATEX II 3D Ex tc IIIC Dc

XA00665F

NEPSI Ex ma II T6, DIP A20/21 IP65

XA00666F

NEPSI Ex ma II T6

XA01342F

INMETRO Ex ma IIC T6 Gb

XA01343F

- INMETRO Ex ta/tb IIIC Da/Db
- INMETRO Ex ma IIC T6 Gb

Safety Instructions FDU93

XA00322F

- ATEX II 1/2 D Ex ta/tb IIIC
- ATEX II 2 G Ex ma IIC T6

XA00323F

ATEX II 1/2 D Ex ta/tb IIIC

XA00481F

- IEC Ex ma IIC T6 Gb
- IEC Ex ta/tb IIIC Da/Db

XA00483F

IEC Ex ta/tb IIIC Da/Db

XA00609F

- ATEX II 3G Ex nA IIC T6 Gc
- ATEX II 3D Ex tc IIIC Dc

XA00665F

NEPSI Ex ma II T6, DIP A20/21 IP65

XA00667F

NEPSI DIP A20/21 IP65

XA01343F

- INMETRO Ex ta/tb IIIC Da/Db
- INMETRO Ex ma IIC T6 Gb

Safety Instructions FDU95

XA00322F

- ATEX II 1/2 D Ex ta/tb IIIC
- ATEX II 2 G Ex ma IIC T6

XA00323F

ATEX II 1/2 D Ex ta/tb IIIC

XA00481F

- IEC Ex ma IIC T6 Gb
- IEC Ex ta/tb IIIC Da/Db

XA00483F

IEC Ex ta/tb IIIC Da/Db

XA00609F

ATEX II 3D Ex tc IIIC Dc

XA00665F

NEPSI Ex ma II T6, DIP A20/21 IP65

XA00667F

NEPSI DIP A20/21 IP65

XA01343F

- INMETRO Ex ta/tb IIIC Da/Db
- INMETRO Ex ma IIC T6 Gb

Documentation for FMU90 transmitter

- Technical Information TI00397F
- Operating Instructions:
- BA00288F (HART, level measurement)
- BA00289F (HART, flow measurement)
- BA00292F (Profibus DP, level measurement)
- BA00293F (Profibus DP, flow measurement)
- Description of Device Parameters: BA00290F
- Safety Instructions (ATEX II 3D): XA00326F

Documentation for FMU95 transmitter

- Technical Information TI00398F
- Operating Instructions: BA00344F
- Description of Device Parameters: BA00345F
- Safety Instructions (ATEX II 3D): XA00326F



