

Safety Instructions

Proline Teqwave MW 300

Class I Zone 2
Class I Division 2



Proline Teqwave MW 300

Table of contents

About this document	4
Associated documentation	4
Certificates and declarations	4
Manufacturer address	4
Extended order code	5
Safety instructions: General	7
Safety instructions: Installation	8
Temperature tables	9
Connection values: Signal circuits	10

About this document



The document number of these Safety Instructions (XA) must match the information on the nameplate.

Associated documentation

For an overview of the scope of the associated Technical Documentation, refer to the following:

- *Device Viewer* (www.endress.com/deviceviewer): Enter serial number from nameplate.
- *Endress+Hauser Operations app*: Enter serial number from nameplate or scan matrix code on nameplate.

To commission the device, please observe the Operating Instructions pertaining to the device:

Measuring device	Documentation code	
	HART	Modbus RS485
Teqwave MW	BA02320D	BA02321D

Additional documentation

Contents	Document type	Documentation code
Remote display and operating module DKX001	Special documentation	SD01763D
	Safety Instructions Class I Zone 2; Class I Division 2	XA01513D
Explosion Protection	Brochure	CP00021Z/11
Control drawing		As wanted on the nameplate.

Please note the documentation associated with the device.

Certificates and declarations

Certificate number

CSA 16.70087366

Notified body

CSA Group


Manufacturer address

Endress+Hauser Flowtec AG
Kägenstrasse 7
4153 Reinach BL
Switzerland

Extended order code

The extended order code is indicated on the nameplate, which is affixed to the device in such a way that it is clearly visible. Additional information about the nameplate is provided in the associated Operating Instructions.

Structure of the extended order code



* = Placeholder
 At this position, an option (number or letter) selected from the specification is displayed instead of the placeholders.

Device type

The device and the device design is defined in the "Device type" section (Product root).

Basic specifications

The features that are absolutely essential for the device (mandatory features) are specified in the basic specifications. The number of positions depends on the number of features available. The selected option of a feature can consist of several positions.

Optional specifications

The optional specifications describe additional features for the device (optional features). The number of positions depends on the number of features available. The features have a 2-digit structure to aid identification (e.g. JA). The first digit (ID) stands for the feature group and consists of a number or a letter (e.g. J = Test, Certificate). The second digit constitutes the value that stands for the feature within the group (e.g. A = 3.1 material (wetted parts), inspection certificate).

More detailed information about the device is provided in the following tables. These tables describe the individual positions and IDs in the extended order code which are relevant to hazardous locations.

Device type

Position	Order code for	Option selected	Description
1	Instrument family	4	Total solids measurement via microwave transmission
2	Sensor	W	Sensor type
3	Transmitter	3	Transmitter type: 4-wire, compact version

Position	Order code for	Option selected	Description
4	Generation index	B	Platform generation
5, 6	Nominal diameter	Examples: 50, 80, 1H, 1F, 2H, 2F, 3H ^{1) 2)}	Nominal diameter of sensor

- 1) For the exact specification of the nominal diameter, see nameplate
 2) For replacement transmitter only: XX

Basic specifications

Position 1, 2 Order code for "Approval" Option selected	Position 4, 5 Order code for "Output, input 1" Option selected	Type of protection Transmitter
CS	BA, MA	Class I Division 2 Groups A-D T5...T1
CZ	BA, MA	Class I Zone 2 AEx/Ex ec nC IIC T5...T1 Gc

Position	Order code for	Option selected	Description
4, 5	Output, input 1	BA	4-20mA HART
		MA	Modbus RS485
6	Output, input 2	A	W/o
		B	4-20mA
		D	Configurable I/O initial setting off
		E	Pulse/frequency/switch output
		H	Relay
		I	4-20mA input
		J	Status input
7	Output, input 3	A	W/o
		B	4-20mA
		D	Configurable I/O initial setting off
		E	Pulse/frequency/switch output
		H	Relay
		I	4-20mA input
		J	Status input
8	Display; Operation	A	W/o; via communication
		F	4-line, illuminated; touch control
		G	4-line, illuminated; touch control + WLAN

Position	Order code for	Option selected	Description
		M	Without; prepared for remote display DKX001 ¹⁾
		O	Separate, with remote display DKX001 ¹⁾ , 4-line, illuminated; 10 m / 30 ft cable; touch control
9	Housing	A	Alu, coated
11	Design	A	Wafer version
15, 16	Device Model	A2	2

1) DKX001 is separately approved.

Safety instructions: General

- Staff must meet the following conditions for mounting, electrical installation, commissioning and maintenance of the device:
 - Be suitably qualified for their role and the tasks they perform
 - Be trained in explosion protection
 - Be familiar with national regulations or guidelines (e.g. CEC or NEC)
- Install the device according to the manufacturer's instructions and national regulations.
- Do not operate the device outside the specified electrical, thermal and mechanical parameters.
- Only use the device in media to which the wetted materials have sufficient durability.
- Refer to the temperature tables for the relationship between the permitted ambient temperature for the sensor and/or transmitter, depending on the range of application, and the temperature classes.
- Alterations to the device can affect the explosion protection and must be carried out by staff authorized to perform such work by Endress+Hauser.
- Observe all the technical data of the device (see nameplate).
- In devices with damaged AEx/Ex db threads:
 - Use in hazardous areas is not permitted.
 - Repair of AEx/Ex db threads is not permitted.
- Avoid electrostatic charge (e.g. caused by friction, cleaning, maintenance, strong currents in the medium):
On the attached stainless steel nameplate and on painted metallic housings that are not integrated into the local potential equalization system.

WARNING

Substitution of components is not permitted.

- ▶ Substitution of components may impair suitability for Class I, Division 2.

Safety instructions: Installation

- Continuous service temperature of the connecting cable:
 - 20 to +80 °C; but at least according to the operating temperature range of the application plus allowance for process conditions ($T_{a, \min}$ and $T_{a, \max} + 20$ K).
- Only use certified cable glands suitable for the application. Observe national regulations and standards.
- When the measuring device is connected, attention must be paid to the type of protection at the transmitter.
- Turning the transmitter housing
 - Loosen both hexagon socket screws until the transmitter housing can be turned.
 - Turn transmitter housing to desired position (mechanically limited); if necessary turn 270° in other direction.
 - Tighten both hexagon socket screws with a maximum of 7 Nm.
- In potentially explosive atmospheres:
 - Do not disconnect the electrical connection of the power supply circuit when energized.
 - Do not open the connection compartment cover when the device is energized.
- Install the transmitter circuit wiring according to Canadian Electrical Code (CEC) respective National Electrical Code (NEC) using threaded conduit or other wiring methods in accordance with articles 500 to 510.

AEx/Ex ec type of protection


- In potentially explosive atmospheres: Do not disconnect the electrical connection of the power supply circuit when energized.
- Seal unused entry glands with approved sealing plugs that correspond to the type of protection.
- Only use certified cable entries or sealing plugs.

Optional external WLAN antenna

- Connect the antenna bushing H337 to the transmitter housing and tighten by hand.
- Use only external antennas supplied by Endress+Hauser.
- Connect antenna or antenna cable with plug-in connector type N (MIL-STD-348) to antenna bushing H337.

Intrinsic safety

Observe the guidelines for interconnecting intrinsically safe circuits (e.g. , proof of intrinsic safety).

- 
 - When using the remote display and operating module DKX001 the internal display and operating module must be removed.
 - When using the separate approved, remote display and operating module DKX001, only use the following variants: Basic specification of the remote display and operating module DKX001, order code "Approval", option CS, CZ

Potential equalization

- Integrate the device into the potential equalization .
- If the ground connection has been established via the pipe as specified, it is also possible to integrate the sensor into the potential equalization system via the pipe.
- The antenna bushing H337 of the external antenna must be integrated into the potential equalization system. This is the case if the sensor is connected in accordance with the regulations via the coupling.

Temperature tables

Ambient temperature

Minimum ambient temperature

$$T_{a, \min} = -20 \text{ }^{\circ}\text{C}$$

Maximum ambient temperature

$T_{a, \max} = +60 \text{ }^{\circ}\text{C}$ depending on the medium temperature and temperature class.

Medium temperature

Minimum medium temperature

$$T_{m, \min} = 0 \text{ }^{\circ}\text{C}$$

Maximum medium temperature

$T_{m, \max}$ for T5...T1 depending on the maximum ambient temperature $T_{a, \max}$ and temperature class.

Maximum medium temperature with or without thermal insulation according to Endress+Hauser specifications

DN	$T_{a, \max}$ [$^{\circ}\text{C}$]	$T_{m, \max}$ [$^{\circ}\text{C}$]					
		T6 [85 $^{\circ}\text{C}$]	T5 [100 $^{\circ}\text{C}$]	T4 [135 $^{\circ}\text{C}$]	T3 [200 $^{\circ}\text{C}$]	T2 [300 $^{\circ}\text{C}$]	T1 [450 $^{\circ}\text{C}$]
50...300	50	–	80	80	80	80	80
	55	–	70	80	80	80	80
	60	–	60	80	80	80	80

Connection values: Signal circuits

The following tables contain specifications which are dependent on the transmitter type and its input and output assignment. Compare the following specifications with those on the nameplate of the transmitter.

Terminal assignment

Transmitter: supply voltage, input/outputs


HART

Supply voltage		Input/output 1		Input/output 2		Input/output 3	
1 (+)	2 (-)	26 (+)	27 (-)	24 (+)	25 (-)	22 (+)	23 (-)
Device-specific terminal assignment: adhesive label in terminal cover.							

Modbus RS485

Supply voltage		Input/output 1		Input/output 2		Input/output 3	
1 (+)	2 (-)	26 (B)	27 (A)	24 (+)	25 (-)	22 (+)	23 (-)
Device-specific terminal assignment: adhesive label in terminal cover.							

Remote display and operating module DKX001

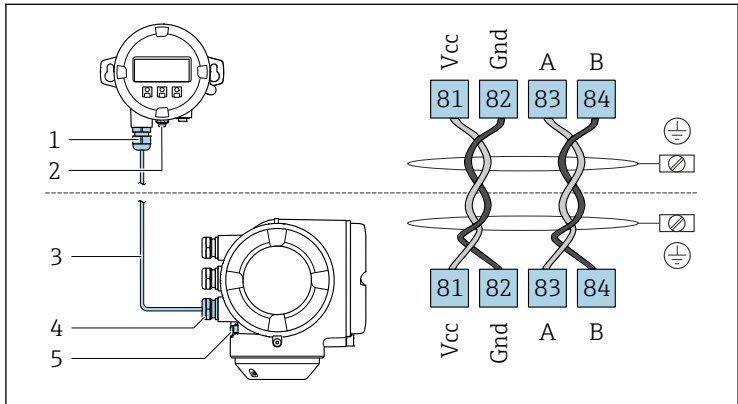

A0027518

- 1 Remote display and operating module DKX001
- 2 Protective earth (PE)
- 3 Connecting cable
- 4 Measuring device
- 5 Protective earth (PE)

Safety-related values

Order code for "Output; input 1"

Option	Output/input type	Safety-related values for output/input 1	
		26 (+)	27 (-)
BA	Current output 4 to 20 mA HART	$U_N = 30 V_{DC}$ $U_M = 250 V_{AC}$	
MA	Modbus RS485	$U_N = 30 V_{DC}$ $U_M = 250 V_{AC}$	

Order code for "Output; input 2" and "Output; input 3"

Option	Output/input type	Safety-related values for output/input			
		2		3	
		24 (+)	25 (-)	22 (+)	23 (-)
B	Current output 4 to 20 mA	$U_N = 30 V_{DC}$ $U_M = 250 V_{AC}$			
D	User-configurable input/ output	$U_N = 30 V_{DC}$ $U_M = 250 V_{AC}$			
E	Pulse/frequency/switch output	$U_N = 30 V_{DC}$ $U_M = 250 V_{AC}$			
H	Relay output	$U_N = 30 V_{DC}$ $I_N = 100 mA_{DC}/500 mA_{AC}$ $U_M = 250 V_{AC}$			
I	Current input 0/4 to 20 mA	$U_N = 30 V_{DC}$ $U_M = 250 V_{AC}$			
J	Status input	$U_N = 30 V_{DC}$ $U_M = 250 V_{AC}$			

Remote display DKX001

Basic specification, position 1, 2 Approval	Terminal assignment	Basic specification, position 8 Display; operation Option O
Option CS, CZ	81, 82, 83, 84	$U_n = 3.3 V$ $I_n = 150 mA$



71627417

www.addresses.endress.com
