

Safety Instructions

Memosens ISFET pH sensors

pH measurement

Supplement to BA02154C
Safety instructions for electrical apparatus in
explosion-hazardous areas
NEPSI Ex ia IIC T3/T4/T6 Ga
NEPSI Ex ia IIC T4/T6 Ga



Memosens ISFET pH sensors

pH measurement

Table of contents

Associated documentation	4
Additional documentation	4
Certificates	4
Identification	4
Safety Instructions	5
Temperature tables	6
Connection	7
Installation conditions	8

Associated documentation

This document is an integral part of Operating Instructions BA02154C.

Additional documentation



- Competence Brochure CP00021Z
 - Explosion Protection: Guidelines and General Principles
 - www.endress.com

Certificates

The NEPSI certificates and other certificates/declarations of conformity are available in the Downloads area of the Endress+Hauser website:

www.endress.com/download

The number of the NEPSI certificate that applies to the product can be found on the nameplate.

Identification

The nameplate provides you with the following information on your device:

- Manufacturer identification
 - Order code
 - Extended order code
 - Serial number
 - Safety information and warnings
 - Ex marking on hazardous area versions
- Compare the information on the nameplate with the order.

Type code

Item type	Version					
xPS47E xPS77E	NA	*	*	**	c	+*
x = C, OC No Ex relevance	NEPSI Ex ia IIC T3/T4/T6 Ga	c indicates the shaft length (≤ 600 mm (23.6 in) no Ex relevance)				

Item type	Version					
xPS97E	NA	*	*	**	c	+*
x = C, OC No Ex relevance	NEPSI Ex ia IIC T4/T6 Ga	c indicates the shaft length (≤ 600 mm (23.6 in) no Ex relevance)				

Certificates and approvals


Ex approvals

The Memosens ISFET pH sensors, type CPSxE, have been certified by the National Supervision and Inspection Centre for Explosion Protection and Safety of Instrumentation (NEPSI). These products meet the following standards:


- GB 3836.1 Explosive atmospheres-Part 1: Equipment-General requirements
- GB 3836.4 Explosive atmospheres-Part 4: Equipment protection by intrinsic safety "I"
- GB 3836.20 Explosive atmospheres-Part 20: Equipment with equipment protection level (EPL) Ga

Please find the current versions of the standards on the certificate.

CPS47E / CPS77E:

 NEPSI Ex ia IIC T3/T4/T6 Ga

CPS97E:

 NEPSI Ex ia IIC T4/T6 Ga


Safety Instructions

The inductive Memosens ISFET pH sensors CPS47E, CPS77E, CPS97E are suitable for use in hazardous areas.

- The sensors may not be operated in electrostatically critical processing conditions. Intense vapour or dust flows directly impacting on the connection system must be avoided.
- The sensor may not be operated on processing conditions, in which an electrostatic loading of the sensor and the connecting system is to be counted. Operation in product application intended fluid media providing conductivity of least 10 ns/cm can be assumed as electrostatic uncritical.
- Ex-protected digital sensors with Memosens technology are identified by an orange-red ring on the terminal head.


- The procedures for electrical connection described in the Operating Instructions must be followed.
- In order to maintain and guarantee the explosion protection of the device, the user may not modify the configuration in any way. Every change can compromise the safety of the device.
- The end user must adhere to the Operating Instructions and the following standards for the installation, operation and maintenance of the product:
 - GB 50257 "Code for construction and acceptance of electric device for explosion atmospheres and fire hazard electrical equipment installation engineering".
 - GB 3836.13 "Explosive atmospheres - Part 13: Equipment repair, overhaul and reclamation"
 - GB/T 3836.15 "Explosive atmospheres - Part 15: Electrical installations design, selection and erection"
 - GB/T 3836.16 "Explosive atmospheres - Part 16: Electrical installations inspection and maintenance"
 - GB/T 3836.18 "Explosive atmospheres - Part 18: Intrinsically safe electrical systems"

Please find the current versions of standards on the certificate.

The correlations between the device model, the temperature class, the process temperature range and the ambient temperature range are indicated in the temperature tables →  6.

Temperature tables

Sensor	Temperature class	Process temperature T _p		Ambient temperature T _a	
		minimum	maximum	minimum	maximum
CPS47E CPS77E	T3	-15 °C (5 °F)	135 °C (275 °F)	-15 °C (5 °F)	70 °C (158 °F)
	T4	-15 °C (5 °F)	115 °C (239 °F)	-15 °C (5 °F)	75 °C (167 °F)
			110 °C (230 °F)		80 °C (176 °F)
			100 °C (212 °F)		85 °C (185 °F)
			90 °C (194 °F)		90 °C (194 °F)
T6	-15 °C (5 °F)	65 °C (149 °F)	-15 °C (5 °F)	65 °C (149 °F)	
CPS97E	T4	-15 °C (5 °F)	110 °C (230 °F)	-15 °C (5 °F)	80 °C (176 °F)
			100 °C (212 °F)		85 °C (185 °F)
			90 °C (194 °F)		90 °C (194 °F)
	T6	-15 °C (5 °F)	65 °C (149 °F)	-15 °C (5 °F)	65 °C (149 °F)

The temperature table above applies only under the following installation conditions, which are described in the following graphic →  8. If the installation conditions cannot be met, the maximum

process temperature T_p must not exceed the maximum ambient temperature T_a .

Connection

Ex specification


- The CPSx7E-type ISFET pH sensors are suitable for use in hazardous environments.
- The approved digital CPSx7E-type ISFET pH sensors have an intrinsically safe input with the following parameter set:

Parameters	Value
P_1	180 mW

The approved digital CPSx7E-type ISFET pH sensors must be connected to a Memosens measuring cable or cable transmitter with an intrinsically safe output with the following parameter:

Parameters	Value
P_o	Maximum 180 mW

Installation conditions

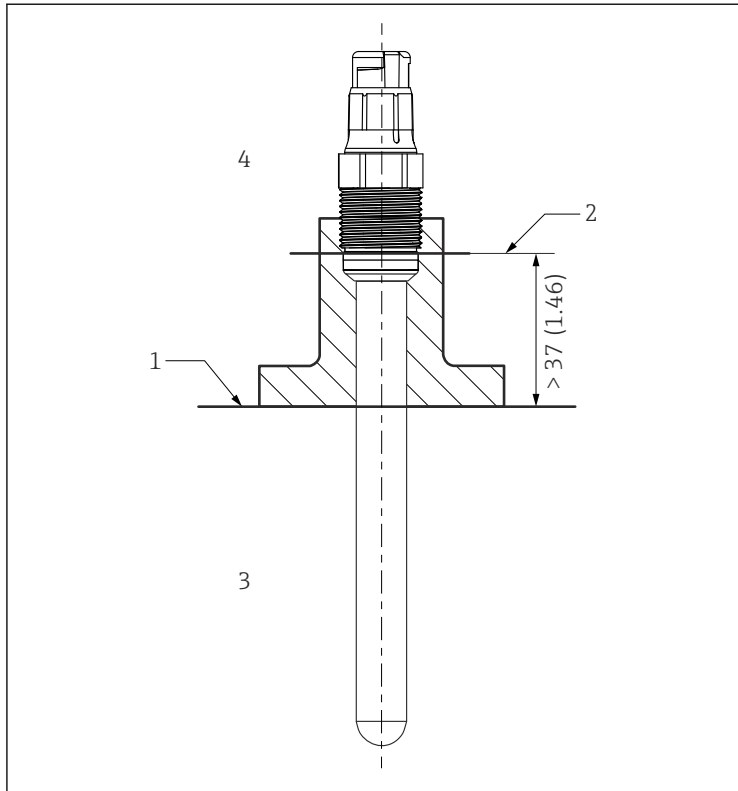

A0041281

1 Installation conditions

- 1 Limit
- 2 Distance between plug-in head (lower edge) and process medium, without ring and thrust collar
- 3 Process temperature T_p
- 4 Ambient temperature T_a



71682054

www.addresses.endress.com
