

Safety Instructions

Memosens pH/ORP sensors

pH and ORP measurement

Supplement to BA01988C, BA02142C
Safety instructions for electrical apparatus for explosion-
hazardous areas

ATEX II 1G Ex ia IIC T3/T4/T6 Ga

ATEX II 1G Ex ia IIC T4/T6 Ga

IECEX Ex ia IIC T3/T4/T6 Ga

IECEX Ex ia IIC T4/T6 Ga



Memosens pH/ORP sensors

pH and ORP measurement


Table of contents

Related documentation	4
Supplementary documentation	4
Certificates	4
Identification	4
Safety instructions	5
Temperature tables	5
Connection	6
Installation conditions	7

Related documentation

This document is an integral part of Operating Instructions BA01988C.
 This document is an integral part of Operating Instructions BA02142C.

Supplementary documentation

-  Competence Brochure CP00021Z
 - Explosion Protection: Guidelines and General Principles
 - www.endress.com

Certificates

The certificates and declarations of conformity are available in the Downloads area of the Endress+Hauser website:
www.endress.com/download

EU Declaration of Conformity

EC_00832

EU-type examination certificate

BVS 19 ATEX E 062 X

IECEX certificate

IECEX BVS 19.0056X

Identification

The following information on the device can be found on the nameplate:

- Manufacturer identification
- Order code
- Extended order code
- Serial number
- Safety information and warnings
- Ex markings
- Certificate number

► Compare the information on the nameplate with the order.

Type code

ATEX

Item type	Version	*	*	**	*	***	+*
xPS11E xPS12E xPS16E xPS41E xPS42E xPS61E xPS62E xPS71E xPS72E xPS76E	BA						
x = C, OC No Ex relevance	II 1G Ex ia IIC T3/T4/T6 Ga	No Ex relevance					

Item type	Version	*	*	**	*	***	+*
xPS31E xPS91E xPS92E xPS96E	BA						
x = C, OC No Ex relevance	II 1G Ex ia IIC T4/T6 Ga	No Ex relevance					

IECEEx

Item type	Version						
xPS11E xPS12E xPS16E xPS41E xPS42E xPS61E xPS62E xPS71E xPS72E xPS76E	IA	*	*	**	*	***	+*
x = C, OC No Ex relevance	Ex ia IIC T3/T4/T6 Ga	No Ex relevance					

Item type	Version						
xPS31E xPS91E xPS92E xPS96E	IA	*	*	**	*	***	+*
x = C, OC No Ex relevance	Ex ia IIC T4/T6 Ga	No Ex relevance					

Certificates and approvals

xPS11E/xPS12E/xPS16E/xPS41E/xPS42E/xPS61E/xPS62E/xPS71E/xPS72E/xPS76E:

Ex ia IIC T3/T4/T6 Ga

xPS31E/xPS91E/xPS92E/xPS96E:

Ex ia IIC T4/T6 Ga

Notified body

DEKRA Testing and Certification GmbH

Bochum


Safety instructions

- It is not permitted to operate the sensor under electrostatically critical process conditions. Significant vapor and dust clouds, which have a direct impact on the Memosens sensor head, must be avoided.
- Ex-protected digital sensors with Memosens technology are identified by an orange-red ring on the terminal head.
- When using devices and sensors, observe the requirements for electrical installations in explosion-hazardous areas (EN/IEC 60079-14).
- The procedures for electrical connection described in the Operating Instructions must be followed.

Temperature tables

Sensor	Temperature class	Process temperature T_p	Ambient temperature T_a
xPS11E xPS12E xPS16E xPS41E xPS42E xPS72E	T3	$-15\text{ °C (5 °F)} \leq T_p \leq 135\text{ °C (275 °F)}$	$-15\text{ °C (5 °F)} \leq T_a \leq 70\text{ °C (158 °F)}$
	T4	$-15\text{ °C (5 °F)} \leq T_p \leq 120\text{ °C (248 °F)}$	$-15\text{ °C (5 °F)} \leq T_a \leq 75\text{ °C (167 °F)}$
		$-15\text{ °C (5 °F)} \leq T_p \leq 110\text{ °C (230 °F)}$	$-15\text{ °C (5 °F)} \leq T_a \leq 80\text{ °C (176 °F)}$
		$-15\text{ °C (5 °F)} \leq T_p \leq 100\text{ °C (212 °F)}$	$-15\text{ °C (5 °F)} \leq T_a \leq 85\text{ °C (185 °F)}$
		$-15\text{ °C (5 °F)} \leq T_p \leq 90\text{ °C (194 °F)}$	$-15\text{ °C (5 °F)} \leq T_a \leq 90\text{ °C (194 °F)}$
T6	$-15\text{ °C (5 °F)} \leq T_p \leq 70\text{ °C (158 °F)}$	$-15\text{ °C (5 °F)} \leq T_a \leq 70\text{ °C (158 °F)}$	

Sensor	Temperature class	Process temperature T_p	Ambient temperature T_a
xPS61E xPS62E xPS71E xPS76E	T3	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_p \leq 140\text{ }^{\circ}\text{C (284 }^{\circ}\text{F)}$	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_a \leq 70\text{ }^{\circ}\text{C (158 }^{\circ}\text{F)}$
	T4	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_p \leq 120\text{ }^{\circ}\text{C (248 }^{\circ}\text{F)}$	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_a \leq 75\text{ }^{\circ}\text{C (167 }^{\circ}\text{F)}$
		$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_p \leq 110\text{ }^{\circ}\text{C (230 }^{\circ}\text{F)}$	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_a \leq 80\text{ }^{\circ}\text{C (176 }^{\circ}\text{F)}$
		$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_p \leq 100\text{ }^{\circ}\text{C (212 }^{\circ}\text{F)}$	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_a \leq 85\text{ }^{\circ}\text{C (185 }^{\circ}\text{F)}$
	T6	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_p \leq 90\text{ }^{\circ}\text{C (194 }^{\circ}\text{F)}$	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_a \leq 90\text{ }^{\circ}\text{C (194 }^{\circ}\text{F)}$
xPS31E	T4	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_p \leq 80\text{ }^{\circ}\text{C (176 }^{\circ}\text{F)}$	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_a \leq 90\text{ }^{\circ}\text{C (194 }^{\circ}\text{F)}$
	T6	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_p \leq 70\text{ }^{\circ}\text{C (158 }^{\circ}\text{F)}$	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_a \leq 70\text{ }^{\circ}\text{C (158 }^{\circ}\text{F)}$
xPS91E xPS92E xPS96E	T4	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_p \leq 110\text{ }^{\circ}\text{C (230 }^{\circ}\text{F)}$	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_a \leq 80\text{ }^{\circ}\text{C (176 }^{\circ}\text{F)}$
		$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_p \leq 100\text{ }^{\circ}\text{C (212 }^{\circ}\text{F)}$	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_a \leq 85\text{ }^{\circ}\text{C (185 }^{\circ}\text{F)}$
		$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_p \leq 90\text{ }^{\circ}\text{C (194 }^{\circ}\text{F)}$	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_a \leq 90\text{ }^{\circ}\text{C (194 }^{\circ}\text{F)}$
	T6	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_p \leq 70\text{ }^{\circ}\text{C (158 }^{\circ}\text{F)}$	$0\text{ }^{\circ}\text{C (32 }^{\circ}\text{F)} \leq T_a \leq 70\text{ }^{\circ}\text{C (158 }^{\circ}\text{F)}$

The temperature table above applies only under the following installation conditions, which are described in the following graphic →  7. If the installation conditions cannot be met, the maximum process temperature T_p must not exceed the maximum ambient temperature T_a .

Connection

Ex specification


- The pH/ORP sensors of model series xPSxxE are suitable for use in hazardous environments.
- The approved digital pH/ORP sensors of model series xPSxxE have an intrinsically safe input with the following parameter set:

Parameter	Value
P_i	180 mW

The approved digital pH/ORP sensors of model series xPSxxE must be connected to a Memosens cable or a cable transmitter having an intrinsically safe output with the following parameter:

Parameter	Value
P_o	Maximum 180 mW

Installation conditions

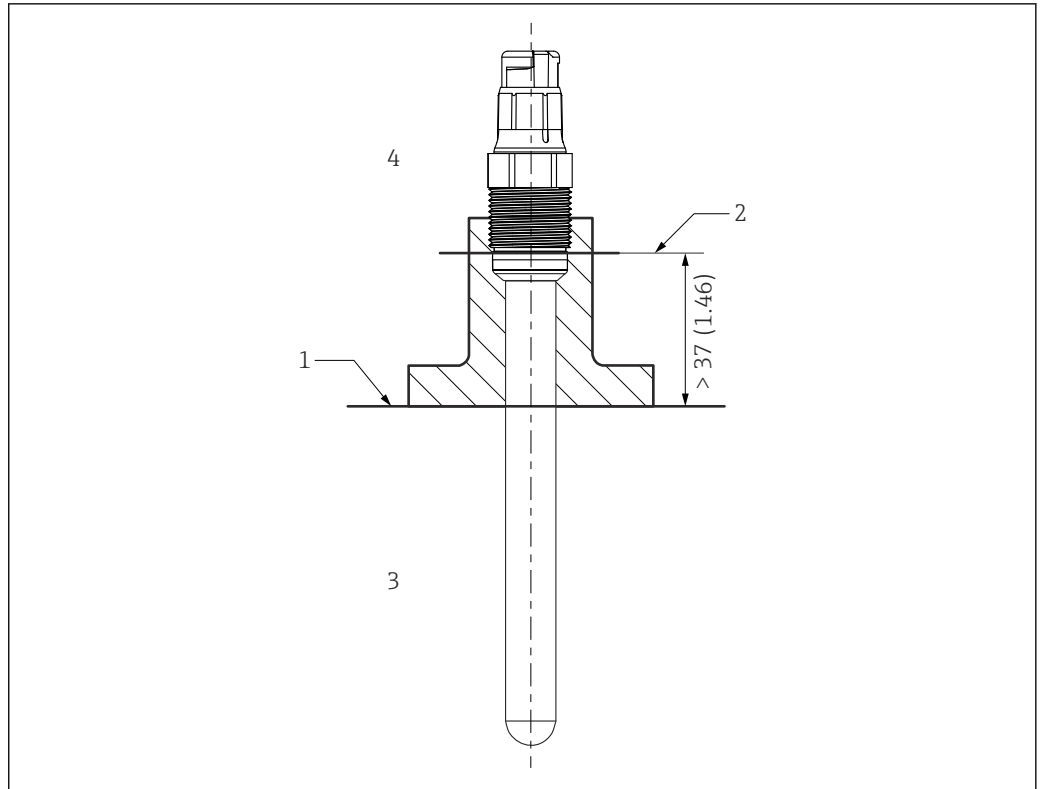

A0041281

1 Installation conditions

- 1 Limit
- 2 Distance between plug-in head (lower edge) and process medium, without ring and thrust collar
- 3 Process temperature T_p
- 4 Ambient temperature T_a



71687779

www.addresses.endress.com
