
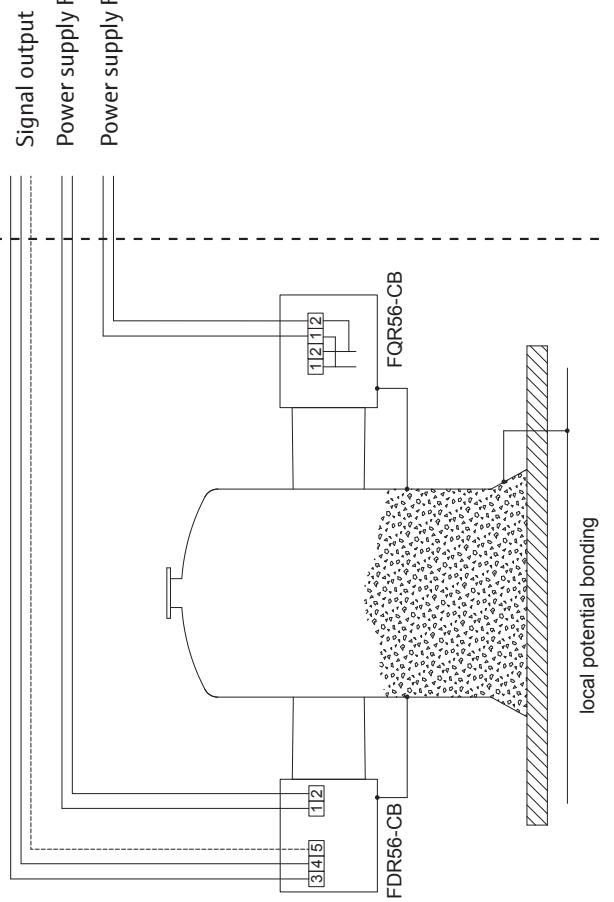


Hazardous location

Class II, Div. 1, Groups E, F, G

Non hazardous location

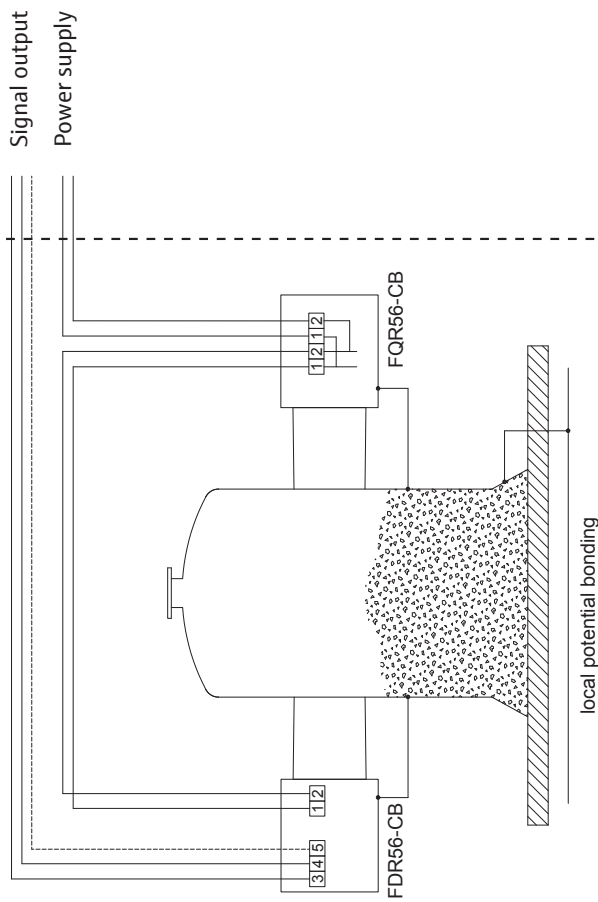

Suitable for Class II, Div. 1, Groups E, F, G

1. Install per Canadian Electrical Code, Part I or National Electrical Code (ANSI/NFPA70) as applicable.

– Supply voltage:

- a) 85...253 VAC, 50/60 Hz, max. 4 VA
- b) 20...60 VDC or 20...30 VAC, 50/60 Hz, max. 1.5 W

– Relay contact maximum ratings:

- 250 VAC / 6 A, 125 VDC / 0.4 A or 30 VDC / 5 A

– Current output maximum ratings:

- 4...20 mA, $R \leq 600 \Omega$

– Solid-state relay maximum ratings:

- 30 VAC / 0.4 A or 40 VDC / 0.4 A

– Maximum ambient temperatures:

- 40...+70°C / -40...+158°F

2. Wiring method and sealing must be suitable for Class II, Div. 1 hazardous (classified) locations per the applicable electrical code.

3. Do not open cover when an explosive atmosphere is present!

CAUTION

To reduce the risks of ignition of hazardous atmospheres, disconnect the equipment from the supply circuit before opening. Keep assembly tightly closed when in operation.